



3/20/2017

# **FEATURES**

- 3.3, 5, 9, 12, 15, 24, and 48VDC Nominal Input Voltages
- 1 Watt Output Power
- RoHS Compliant
- Unregulated Output Types
- Two Package Sizes Available
- DAP Case Material
- No External Components Required
- 5-Pin SIP Package
- High Efficiency up to 82%
- Internal SMD Construction
- Industry Standard Pinout

### **DESCRIPTION**

When board space is at a premium and voltage conversions require low power, the LAN E series miniature converters offer superior solutions at an economical price. A multitude of options and operating ranges allow you to custom-tailor these converters to application requirements. At the compact size of 0.77" x 0.24" x 0.39" or 0.77" x 0.28" x 0.39", the LAN E series provides 1 Watt of power while maintaining specifications over the entire industrial operating temperature range.

MODEL SELECTION TABLE										
Single Output Models										
Model Number <sup>(1)</sup>	Input Voltage Range	Output	Voltage		Current	Efficiency		Dipple & Noice	Output Power	
	input voltage Kange	Package 1	Package 2	Package 1	Package 2	Package 1	Package 2	Kippie & Noise	Output I owel	
LANE3.333N		3.3VDC	-	303mA	-	70%	-			
LANE3.305N		5VDC	5VDC	200mA	200mA	70%	70%			
LANE3.309N	3.3VDC	9VDC	9VDC	112mA	112mA	75%	75%	100mVp-p	1 Watt	
LANE3.312N	(2.97~3.63VDC)	12VDC	12VDC	84mA	84mA	78%	78%	100mvp-p	1 vvall	
LANE3.315N		15VDC	15VDC	67mA	67mA	80%	80%			
LANE3.324N		24VDC	24VDC	42mA	42mA	82%	82%			
LANE533N		3.3VDC	-	303mA	-	70%	-			
LANE505N		5VDC	5VDC	200mA	200mA	70%	70%			
LANE509N	5VDC	9VDC	9VDC	112mA	112mA	75%	75%	100mVp-p	1 Watt	
LANE512N	(4.5~5.5VDC)	12VDC	12VDC	84mA	84mA	78%	78%	тооптур-р	ı vvall	
LANE515N		15VDC	15VDC	67mA	67mA	80%	80%			
LANE524N		24VDC	24VDC	42mA	42mA	82%	82%			
LANE933N		3.3VDC	-	303mA	-	70%	-			
LANE905N		5VDC	5VDC	200mA	200mA	70%	70%		1 Watt	
LANE909N	9VDC	9VDC	9VDC	112mA	112mA	75%	75%	100mVp-p		
LANE912N	(8.1~9.9VDC)	12VDC	12VDC	84mA	84mA	78%	78%			
LANE915N		15VDC	15VDC	67mA	67mA	80%	80%			
LANE924N		24VDC	24VDC	42mA	42mA	82%	82%	]		
LANE1233N		3.3VDC	-	303mA	-	70%	-			
LANE1205N		5VDC	5VDC	200mA	200mA	70%	70%	100>/		
LANE1209N	12VDC	9VDC	9VDC	112mA	112mA	75%	75%		4 10/-44	
LANE1212N	(10.8~13.2VDC)	12VDC	12VDC	84mA	84mA	78%	78%	100mVp-p	1 Watt	
LANE1215N		15VDC	15VDC	67mA	67mA	80%	80%	1		
LANE1224N		24VDC	24VDC	42mA	42mA	82%	82%	1		
LANE1533N		3.3VDC	-	303mA	-	70%	-			
LANE1505N		5VDC	5VDC	200mA	200mA	70%	70%	1		
LANE1509N	15VDC	9VDC	9VDC	112mA	112mA	75%	75%	4.00>/	4 10/-44	
LANE1512N	(13.5~16.5VDC)	12VDC	12VDC	84mA	84mA	78%	78%	100mVp-p	1 Watt	
LANE1515N	,	15VDC	15VDC	67mA	67mA	80%	80%	1		
LANE1524N		24VDC	24VDC	42mA	42mA	82%	82%	1		
LANE2433N		3.3VDC	-	303mA	-	70%	-	1		
LANE2405N		5VDC	5VDC	200mA	200mA	70%	70%	1	1 Watt	
LANE2409N	24VDC	9VDC	9VDC	112mA	112mA	75%	75%	400>/		
LANE2412N	(21.6~26.4VDC)	12VDC	12VDC	84mA	84mA	78%	78%	100mVp-p		
LANE2415N	,	15VDC	15VDC	67mA	67mA	80%	80%			
LANE2424N		24VDC	24VDC	42mA	42mA	82%	82%			
LANE485NP		-	5VDC	-	200mA	-	70%			
LANE489NP	10) (20	-	9VDC	-	112mA	-	75%	1		
LANE4812NP	48VDC	-	12VDC	-	84mA	-	78%	100mVp-p	1 Watt	
LANE4815NP	(43.2~52.8VDC)	-	15VDC	-	67mA	-	80%	1 ''		
LANE4824NP		-	24VDC	-	42mA	-	82%	1		



				EL SELECT						
				Dual Output	Models					
Model Number <sup>(1)</sup> Input Voltage Rar			Voltage	Output Current		Efficiency		Ripple & Noise	Output Power	
	input voitage range	Package 1	Package 2	Package 1	Package 2	Package 1	Package 2	Tripple & Noise	Output i owei	
LANE3.333ND		±3.3VDC	-	±150mA	-	70%	-			
LANE3.305ND		±5VDC	±5VDC	±100mA	±100mA	70%	70%		1 Watt	
LANE3.309ND	3.3VDC	±9VDC	±9VDC	±56mA	±56mA	75%	75%	100mVp-p		
LANE3.312ND	(2.97~3.63VDC)	±12VDC	±12VDC	±42mA	±42mA	78%	78%	тооптур-р		
LANE3.315ND		±15VDC	±15VDC	±34mA	±34mA	80%	80%			
LANE3.324ND		±24VDC	±24VDC	±21mA	±21mA	82%	82%			
LANE533ND		±3.3VDC	-	±150mA	-	70%	-			
LANE505ND		±5VDC	±5VDC	±100mA	±100mA	70%	70%			
LANE509ND	5VDC	±9VDC	±9VDC	±56mA	±56mA	75%	75%	100m\/n n	1 Watt	
LANE512ND	(4.5~5.5VDC)	±12VDC	±12VDC	±42mA	±42mA	78%	78%	100mVp-p	ı vvall	
LANE515ND		±15VDC	±15VDC	±34mA	±34mA	80%	80%			
LANE524ND		±24VDC	±24VDC	±21mA	±21mA	82%	82%			
LANE933ND		±3.3VDC	-	±150mA	-	70%	-			
LANE905ND		±5VDC	±5VDC	±100mA	±100mA	70%	70%	1	1 Watt	
LANE909ND	9VDC	±9VDC	±9VDC	±56mA	±56mA	75%	75%	400 1/		
LANE912ND	(8.1~9.9VDC)	±12VDC	±12VDC	±42mA	±42mA	78%	78%	100mVp-p		
LANE915ND	,	±15VDC	±15VDC	±34mA	±34mA	80%	80%	1		
LANE924ND		±24VDC	±24VDC	±21mA	±21mA	82%	82%	1		
LANE1233ND		±3.3VDC	-	±150mA	-	70%	-		1 Watt	
LANE1205ND		±5VDC	±5VDC	±100mA	±100mA	70%	70%	1		
LANE1209ND	12VDC	±9VDC	±9VDC	±56mA	±56mA	75%	75%	1		
LANE1212ND	(10.8~13.2VDC)	±12VDC	±12VDC	±42mA	±42mA	78%	78%	100mVp-p		
LANE1215ND	(1010 1012120)	±15VDC	±15VDC	±34mA	±34mA	80%	80%	1		
LANE1224ND		±24VDC	±24VDC	±21mA	±21mA	82%	82%	1		
LANE1533ND		±3.3VDC	-	±150mA	-	70%	-			
LANE1505ND		±5VDC	±5VDC	±100mA	±100mA	70%	70%	1		
LANE1509ND	15VDC	±9VDC	±9VDC	±56mA	±56mA	75%	75%	1		
LANE1512ND	(13.5~16.5VDC)	±12VDC	±12VDC	±42mA	±42mA	78%	78%	100mVp-p	1 Watt	
LANE1515ND	(10.0 10.0120)	±15VDC	±15VDC	±34mA	±34mA	80%	80%	1		
LANE1524ND		±24VDC	±24VDC	±21mA	±21mA	82%	82%	-		
LANE2433ND		±3.3VDC	-	±150mA	-	70%	- 0270			
LANE2405ND		±5VDC	±5VDC	±100mA	±100mA	70%	70%			
LANE2409ND	24VDC	±9VDC	±9VDC	±56mA	±56mA	75%	75%		1 Watt	
LANE2412ND	(21.6~26.4VDC)	±12VDC	±12VDC	±42mA	±42mA	78%	78%	100mVp-p		
LANE2415ND	(21.0 20.4700)	±15VDC	±15VDC	±34mA	±34mA	80%	80%			
LANE2424ND		±24VDC	±24VDC	±21mA	±21mA	82%	82%			
LANE485NDP		-	±5VDC	-	±100mA	- 02.70	70%			
LANE489NDP	-		±9VDC		±56mA	_	75%	+		
LANE4812NDP	48VDC	-	±12VDC	<u> </u>	±42mA	<del>-</del>	78%	100mVp-p	1 Watt	
LANE4815NDP	(43.2~52.8VDC)	<u>-</u>	±12VDC ±15VDC	<u> </u>	±34mA	-	80%	100111vp-p		
LANE4824NDP	-	-	±15VDC ±24VDC	<u> </u>	±34111A ±21mA	-	82%	-		
LAINE4024INDP	<u> </u>	_	±247DC	-	±Z IIIIA		0270			




SPECIFICATIONS									
All specifications		out Voltage, and Maximum Output		herwise note	ed.				
SPECIFICATION	We reserve the right to change TEST C	Min	Тур	Max	Unit				
INPUT SPECIFICATIONS	TEST C	CINDITIONS	IVIIII	Тур	IVIAX	Offic			
Input Voltage Range	Vo, Io Nom		T	I	±10	%			
Input Filter	VO, 10 140111		Capacitor						
OUTPUT SPECIFICATIONS				Capacii	.01				
Output Voltage				See Tal	ole				
Voltage Tolerance	100% Full Load			000 141	±5	%			
Line Regulation	For 1% of Vin			1.2		%			
· ·		3.3V & 5V output models			15				
Load Regulation	10% to 100% Full Load	9V, 12V, 15V, 24V			10	%			
Output Power		- , , - ,		See Tal	ole				
Output Current		See Table							
Ripple & Noise	BW=DC to 20MHz				100	mVp-p			
Transient Response Setting Time	50% load step change		350		μS				
PROTECTION	i ÿ		<u>'</u>						
Short Circuit Protection	Short term				1	Sec			
<b>ENVIRONMENTAL SPECIFICATION</b>	IS		_	_		_			
Operating Ambient Temperature			-40		+85	°C			
Humidity	Non-Condensing	Non-Condensing			95	%			
Cooling			F	ree Air Con	vection				
MTBF	MIL-HDBK-217F @25°C		3,500,000			Hours			
GENERAL SPECIFICATIONS									
Efficiency <sup>(2)</sup>				See Tal	ble				
Switching Frequency	Full Load, Nominal Input		100		KHz				
Isolation Resistance	500VDC		1000			ΜΩ			
PHYSICAL SPECIFICATIONS									
Weight	Package 1				0.074oz (2.1g)				
TT OIGHT	Package 2 ("P" suffix)	0.095oz (2.7g)							
Dimensions (L x W x H)	Package 1	0.77in x 0.24in x 0.39in (19.5mm x 6mm x 10mm)							
,	Package 2 ("P" suffix)			0.77in x 0.28in x 0.39in (19.5mm x 7.1mm x 10mm)					
Case Material				DAP					


# **NOTES**

- Add "P" to end of model number to indicate Package 2 type.
   3.3VDC output voltage is only available for Package 1 type.
   48VDC nominal input voltage models are only available for Package 2 type.
- (2) As the input voltage increases there will be an increase in efficiency.

\*Due to advances in technology, specifications are subject to change without notice.


## **DERATING CURVES :**

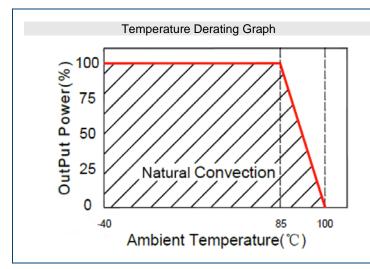

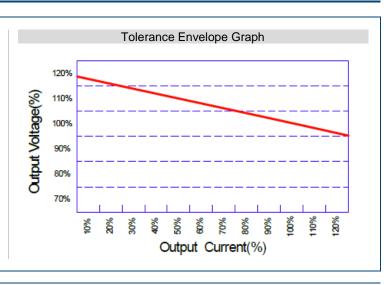




### RECOMMENDED TEST CIRCUITS

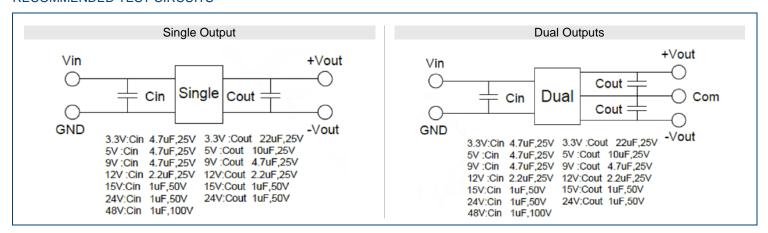


#### MECHANICAL DRAWINGS

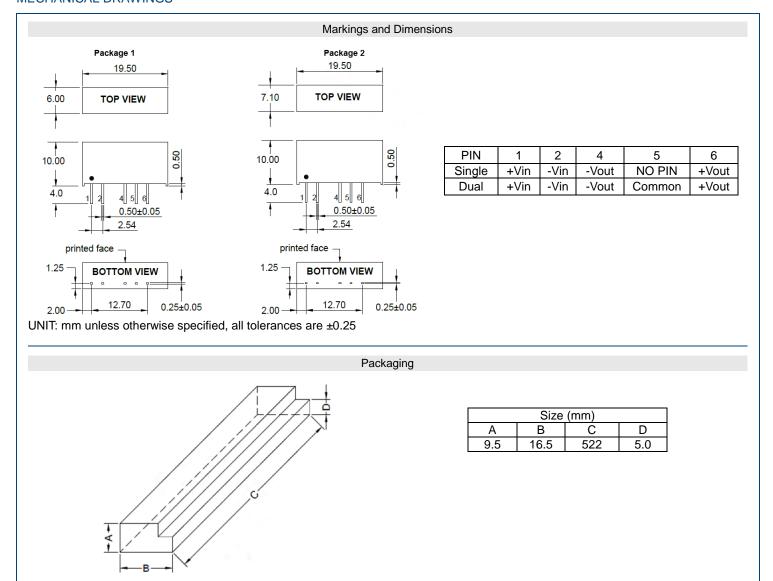



#### FILTERING •

In some circuits, which are sensitive to noise and ripple, a filtering capacitor may be added to the DC/DC output end and input end to reduce the noise and ripple. However, the capacitance of the output filter must be appropriate. If the capacitance is too big, a startup problem may arise. To ensure safe and reliable operation, please refer to the capacitance table below for the maximum filter capacitor size for each output voltage. To get an extremely low ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter. It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference (see figure 1 below.



<Figure 1>

# External Capacitor Table

Vin	External	Vout	External		
VIII	Capacitor Voul		Capacitor		
3.3VDC	4.7uF/25V	3.3VDC	22uF/16V		
5VDC	4.7uF/25V	5VDC	10uF/25V		
9VDC	4.7uF/25V	9VDC	4.7uF/25V		
12VDC	2.2uF/25V	12VDC	2.2uF/25V		
15VDC	1uF/50V	15VDC	1uF/50V		
24VDC	1uF/50V	24VDC	1uF/50V		
48VDC	1uF/100V				

#### COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact Wall Industries for further information:

Phone: ☎(603)778-2300
Toll Free: ☎(888)597-9255
Fax: ☎(603)778-9797

E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833