



Size: 1in x 2in x 0.43in (25.4mm x 50.8mm x 11mm)

FEATURES

- Ultra Wide Input Range
- I/O Isolation 3000VAC with Reinforced Insulation
- No Minimum Load Requirement
- Remote On/Off, Output Voltage Trim
- RoHS & REACH Compliant
- Over Load, Over Voltage, and Short Circuit Protection
- Railway Standard
- UL/cUL/IEC/EN 62368-1 (60950-1) Safety Approval & CE Marking

DESCRIPTION

The MRW10 series of DC/DC converters offers up to 10 watts of output power in a compact, industrial standard package. This series consists of single and dual output models with ultra-wide input voltage range. Each model in this series has high efficiency, no minimum load requirement, as well as over load, over voltage, and short circuit protection. This series has UL/cUL/IEC/EN 62368-1 (60950-1) safety approvals and CE markings.

MODEL SELECTION TABLE

Single Output Models

Model Number ⁽¹⁾	Input Voltage Range	Output Voltage	Max. Output Current	Input Current		Over Voltage Protection	Maximum Capacitive Load	Efficiency	Output Power
				No Load	Max. Load				
MRW10-24S05	24VDC (9~36VDC)	5VDC	2000mA	25mA	496mA	6.2VDC	2200µF	84%	10W
MRW10-24S12		12VDC	835mA		485mA	15VDC	330µF	86%	
MRW10-24S15		15VDC	670mA		481mA	18VDC	220µF	87%	
MRW10-24S24		24VDC	417mA		474mA	30VDC	100µF	88%	
MRW10-48S05	48VDC (18~75VDC)	5VDC	2000mA	15mA	245mA	6.2VDC	2200µF	85%	10W
MRW10-48S12		12VDC	835mA		240mA	15VDC	330µF	87%	
MRW10-48S15		15VDC	670mA		241mA	18VDC	220µF	87%	
MRW10-48S24		24VDC	417mA		242mA	30VDC	100µF	86%	
MRW10-110S05	110VDC (40~160VDC)	5VDC	2000mA	10mA	111mA	6.2VDC	2200µF	82%	10W
MRW10-110S12		12VDC	835mA		107mA	15VDC	330µF	85%	
MRW10-110S15		15VDC	670mA		107mA	18VDC	220µF	85%	
MRW10-110S24		24VDC	417mA		107mA	30VDC	100µF	85%	

MODEL SELECTION TABLE

Single Output Models

Model Number ⁽¹⁾	Input Voltage Range	Output Voltage	Max. Output Current	Input Current		Over Voltage Protection	Maximum Capacitive Load	Efficiency	Output Power
				No Load	Max. Load				
MRW10-24D12	24VDC (9~36VDC)	±12VDC	±417mA	25mA	485mA	±15VDC	150#µF	86%	10W
MRW10-24D15		±15VDC	±335mA		481mA	±18VDC	100#µF	87%	
MRW10-48D12	48VDC (18~75VDC)	±12VDC	±417mA	15mA	234mA	±15VDC	150#µF	89%	10W
MRW10-48D15		±15VDC	±335mA		238mA	±18VDC	100#µF	88%	
MRW10-110D12	110VDC (40~160VDC)	±12VDC	±417mA	10mA	106mA	±15VDC	150#µF	86%	10W
MRW10-110D15		±15VDC	±335mA		106mA	±18VDC	100#µF	86%	

SPECIFICATIONS

All specifications are based on 25°C, Resistive Load, Nominal Input Voltage, and Rated Output Current unless otherwise noted.
 We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit	
INPUT SPECIFICATIONS							
Input Voltage Range	24V Input Models		9	24	36	VDC	
	48V Input Models		18	48	75		
	110V Input Models		40	110	160		
Input Surge Voltage (100ms. Max)	24V Input Models		-0.7		50	VDC	
	48V Input Models		-0.7		100		
	110V Input Models		-0.7		170		
Start-Up Threshold Voltage	24V Input Models				9	VDC	
	48V Input Models				18		
	110V Input Models				40		
Under Voltage Shutdown	24V Input Models			7.5		VDC	
	48V Input Models			16			
	110V Input Models			37			
Input Filter	Internal Pi Type						
OUTPUT SPECIFICATIONS							
Output Voltage	See Table						
Voltage Accuracy						±1.0	%Vnom
Line Regulation	Vin=Min. to Max. @ Full Load					±0.2	%
Load Regulation	Io=0% to 100%		Single Output		±0.5		%
			Dual Output		±1.0		
Voltage Balance	Dual Outputs, Balanced Loads					±2.0	%
Output Power	See Table						
Output Current	See Table						
Minimum Load	No Minimum Load Requirement						
Maximum Capacitive Load	See Table						
Ripple & Noise (20MHz bandwidth)	5V Outputs Models		Measured with 10µF/25V MLCC		50	mVp-p	
	12V, 15V, ±12V, ±15V Output Models				100		
	24V Output Models		Measured with 4.7µF/50V MLCC		150		
Transient Recovery Time ⁽²⁾	25% Load Step Change					300	µsec
Transient Response Deviation	25% Load Step Change		±3			±5	%
Start-Up Time (Power On)	All Models		50				mS
Temperature Coefficient						±0.02	%/°C
Trim Up/Down Range	% of Nominal Output Voltage					±10	%
REMOTE ON/OFF CONTROL							
Converter On						3.5V~12V or Open Circuit	
Converter Off						0V~1.2V or Short Circuit	
Control Input Current (On)	Vctrl=5.0V		0.5				mA
Control Input Current (Off)	Vctrl=0V		-0.5				mA
Control Common						Referenced to Negative Input	
Standby Input Current	Nominal Vin		2.5				mA
PROTECTION							
Short Circuit Protection	Automatic Recovery		Hiccup Mode 0.3Hz typ.				
Over Load Protection	Hiccup Mode		150				%
Over Voltage Protection						See Table	
GENERAL SPECIFICATIONS							
Efficiency						See Table	
Switching Frequency						280	kHz
Isolation Voltage	Reinforced Insulation, Rated for 60 seconds		3000				VACrms
Isolation Resistance	500VDC		1000				MΩ
Isolation Capacitance	100KHz, 1V					1500	pF
PHYSICAL SPECIFICATIONS							
Weight						1.43oz (40.5g)	
Dimensions (L x W x H)						1in x 2in x 0.43in (25.4mm x 50.8mm x 11mm)	
Case Material						Red Copper, Powder Coating	
Base Material						FR4 PCB (Flammability to UL 94V-0 Rated)	
Pin Material						Tinned Copper	
Potting Material						Epoxy (UL94-V0)	
Insulated Frame Material						Non-Conductive Black Plastic (Flammability to UL 94V-0 Rated)	
RFI						Six Sided Shielded, Metal Case	

SPECIFICATIONS

All specifications are based on 25°C, Resistive Load, Nominal Input Voltage, and Rated Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit		
ENVIRONMENTAL SPECIFICATIONS								
Operating Temperature	Natural Convection, Nominal Vin, Load 100% Inom.	MRW10-48D12	-40		Max. Without Heatsink	90	°C	
		MRW10-24S24, 48D15	-40		With Heatsink	93		
		MRW10-24S15, 48S12, 48S15, 24D15	-40			88		92
		MRW10-24S12, 48S24, 24D12, 110D12, 110D15	-40			87		90
		MRW10-48S05, 110S12, 110S15, 110S24	-40			85		89
		MRW10-24S05	-40			84		88
		MRW10-110S05	-40			82		86
Storage Temperature			-50		+125	°C		
Thermal Impedance	Natural Convection without Heatsink		12.1			°C/W		
	Natural Convection with Heatsink		9.8					
	100LFM Convection without Heatsink		9.2					
	100LFM Convection with Heatsink		5.4					
	200LFM Convection without Heatsink		7.8					
	200LFM Convection with Heatsink		4.5					
	400LFM Convection without Heatsink		5.2					
400LFM Convection with Heatsink		3.0						
Humidity	Non-Condensing				95	%RH		
Case Temperature					+105	°C		
Lead Temperature	1.5mm from case for 10Sec.				260	°C		
Cooling Test			Compliance to IEC/EN60068-2-1					
Dry Heat			Compliance to IEC/EN60068-2-2					
Damp Heat			Compliance to IEC/EN60068-2-30					
Shock and Vibration Test			Compliance to IEC/EN 61373					
MTBF (Calculated)	MIL-HDBK-217F@25°C Full Load, Ground Benign		2,845,385			Hours		
SAFETY CHARACTERISTICS								
Safety Approvals	UL/cUL 60950-1 Recognition (UL Certificate) ⁽⁷⁾ IEC/EN 60950-1 (CB Report) EN 50155 IEC 60571 UL/cUL 62368-1 recognition (UL Certificate) ⁽⁷⁾ IEC/EN 62368-1 (CB-Report)							
General			EN 50121-3-2 Railway Applications					
EMI	Conduction	EN55032, EN55022, FCC Part 15		Class A				
EMS	EN55024							
	ESD	EN61000-4-2 Air ±8kV, Contact ±6kV				A		
	Radiated Immunity	EN61000-4-3 10V/m				A		
	Fast Transient ⁽⁶⁾	EN61000-4-4 ±2kV				A		
	Surge ⁽⁶⁾	EN61000-4-5 ±2kV				A		
	Conducted Immunity	EN61000-4-6 10Vrms				A		
	PFMF	EN61000-4-8 3A/M				A		


NOTES

- Two pinning types are available. Add "A" to model number to indicate A pinning (See mechanical drawings for more detail)
Heat sink is also available. Add "HS" to model number to indicate Heatsink.
- Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- It is recommended to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltages may be available, please contact factory.
- Natural convection is about 20LFM but is not equal to still air (0 LFM).
- To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the pins is required.
Suggested capacitors:
24V In: CHEMI-CON KY Series 390µF/63V
48V In: CHEMI-CON KY Series 330µF/100V
110V In: CHEMI-CON KXG Series 220µF/250V.
- This product is Listed to applicable standards and requirements by UL.


*Due to advances in technology, specifications subject to change without notice.

DERATING CURVES


MRW10-48D12 Derating Curve without Heatsink

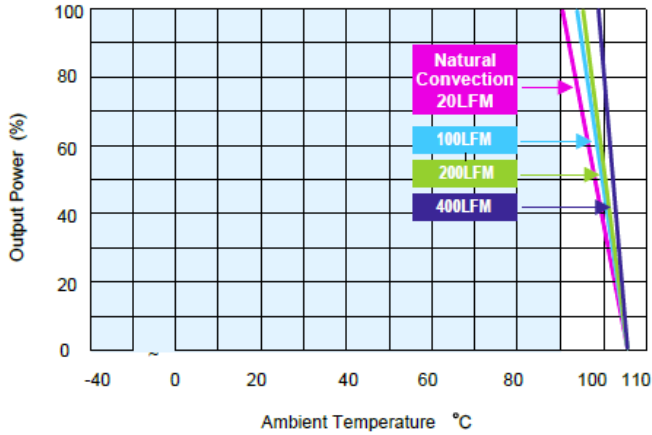


MRW10-48D12 Derating Curve with Heatsink

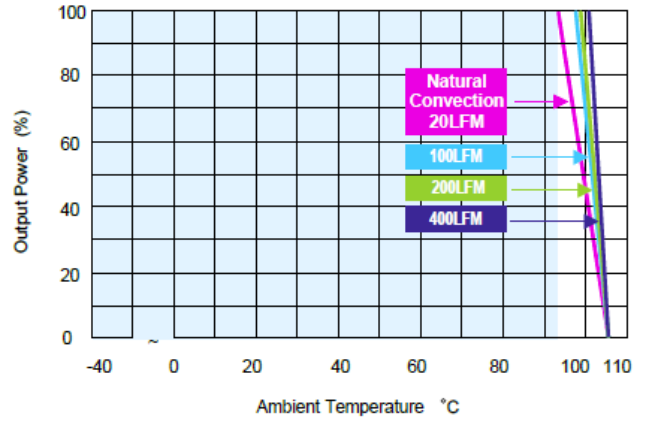


MRW10-24S24, 48D15
Derating Curve without Heatsink

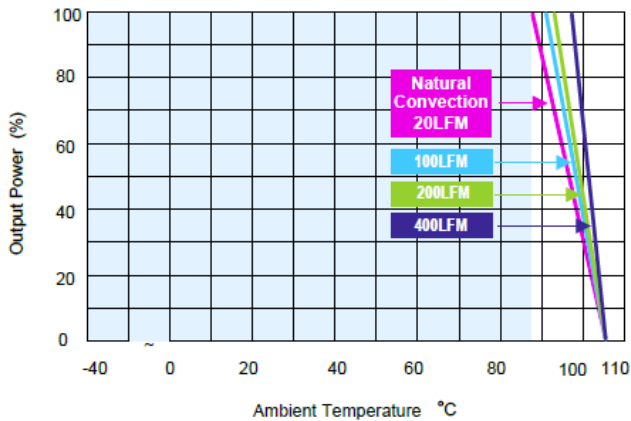


MRW10-24S24, 48D15
Derating Curve with Heatsink

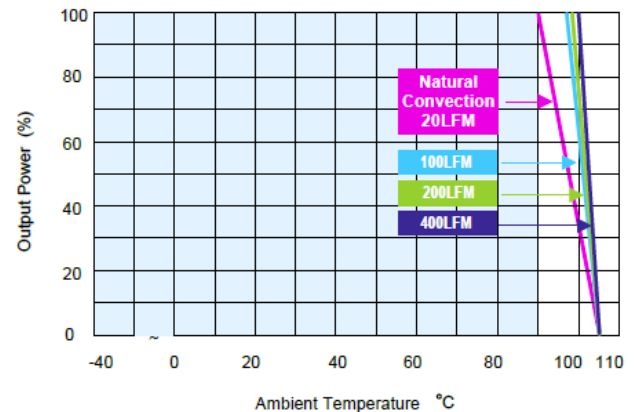


MRW10-24S15, 48S12, 48S15, 24D15
Derating Curve without Heatsink

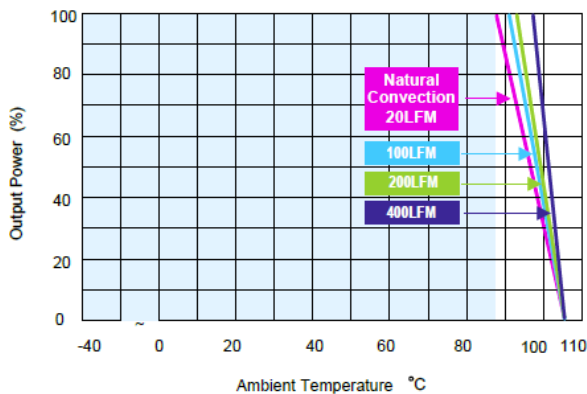


MRW10-24S15, 48S12, 48S15, 24D15
Derating Curve with Heatsink

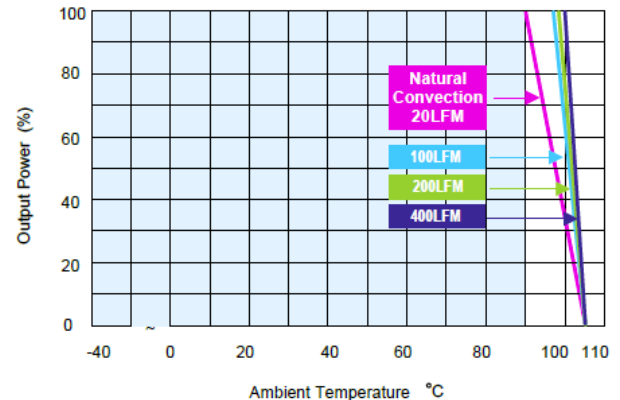


MRW10-24S12, 48S24, 24D12, 110D12, 110D15
Derating Curve without Heatsink

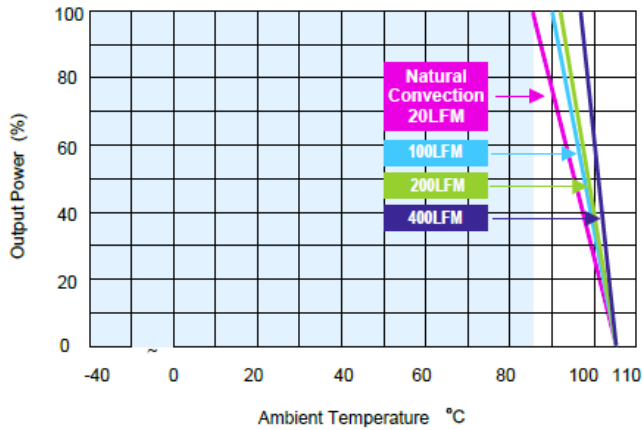


DHZ110-24S12, 48S24, 24D12, 110D12, 110D15
Derating Curve with Heatsink

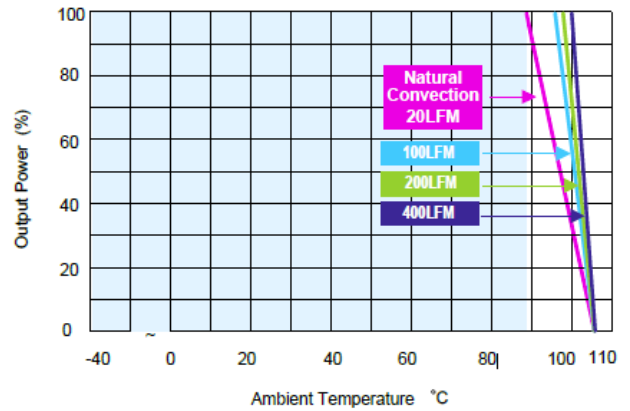


MRW10-48S05, 110S12, 110S15, 110S24
Derating Curve without Heatsink

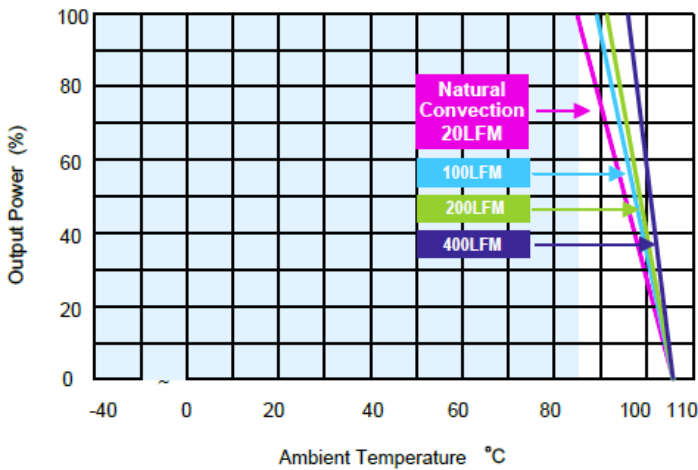


MRW10-48S05, 110S12, 110S15, 110S24
Derating Curve with Heatsink

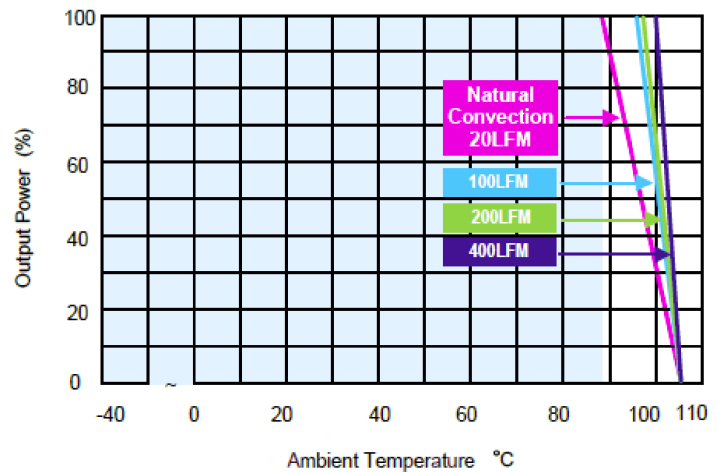


MRW10-24S05 Derating Curve without Heatsink

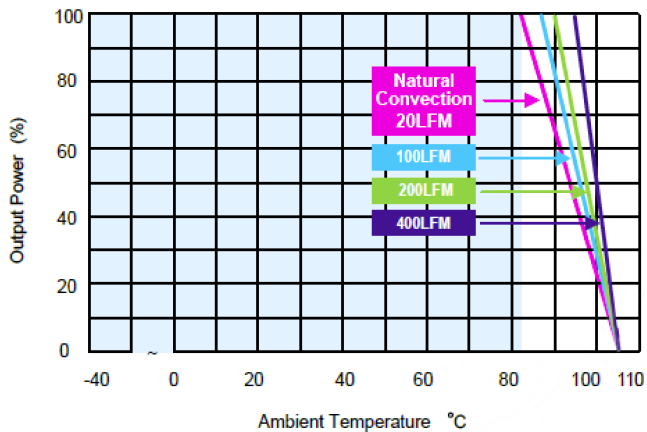


MRW10-24S05 Derating Curve with Heatsink

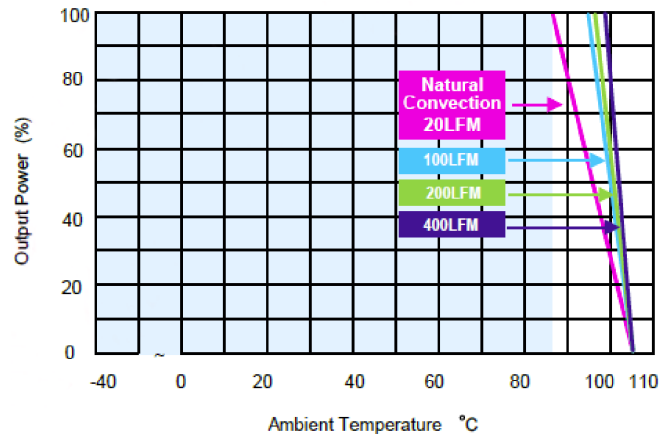

MRW10-110S05 Derating Curve without Heatsink


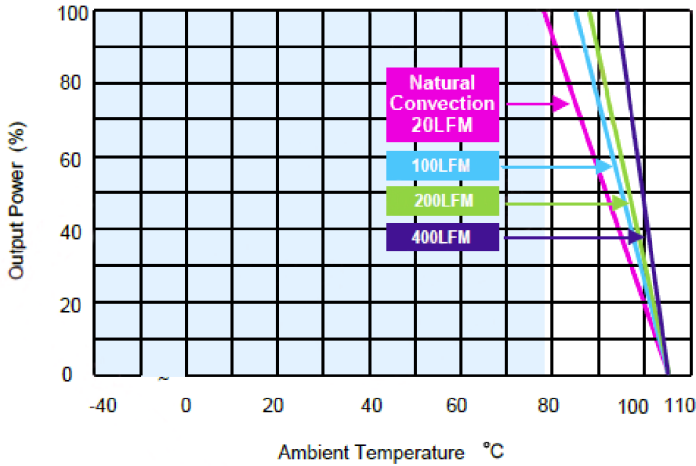


MRW10-110S05 Derating Curve with Heatsink

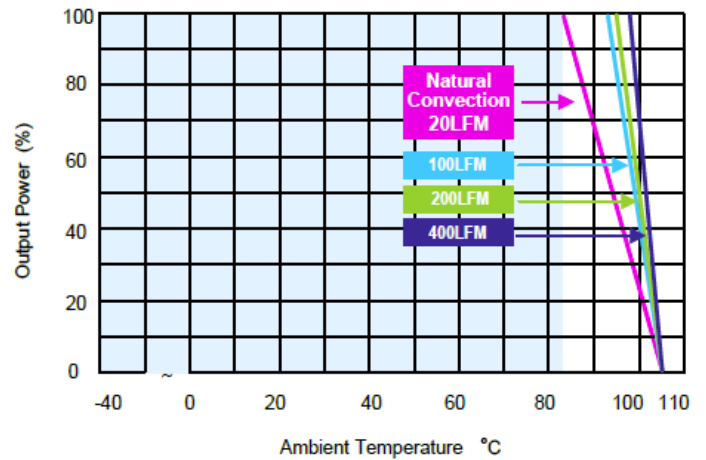

MECHANICAL DRAWINGS

Standard

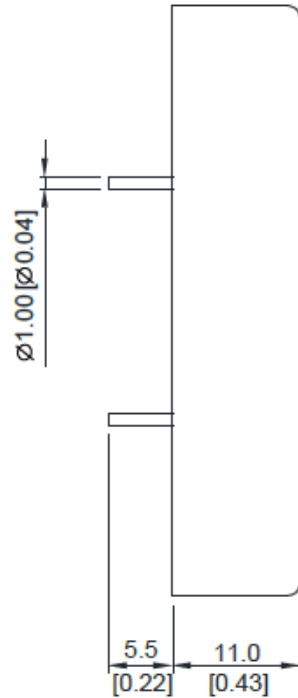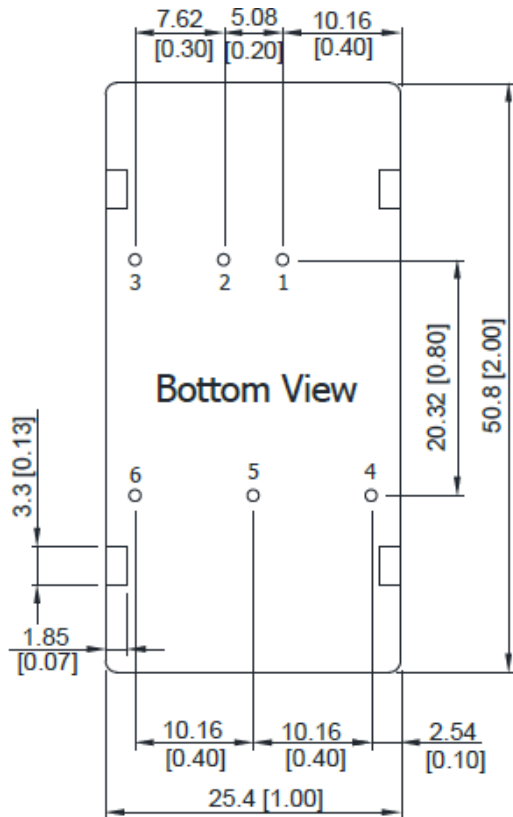


PIN CONNECTIONS

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

All dimensions in mm (inches)
Tolerance: X.X±0.75 (X.XX±0.03)
X.XX±0.25 (X.XXX±0.01)
Pin Diameter Ø1.0±0.05 (0.04±0.002)

"A" Pinning

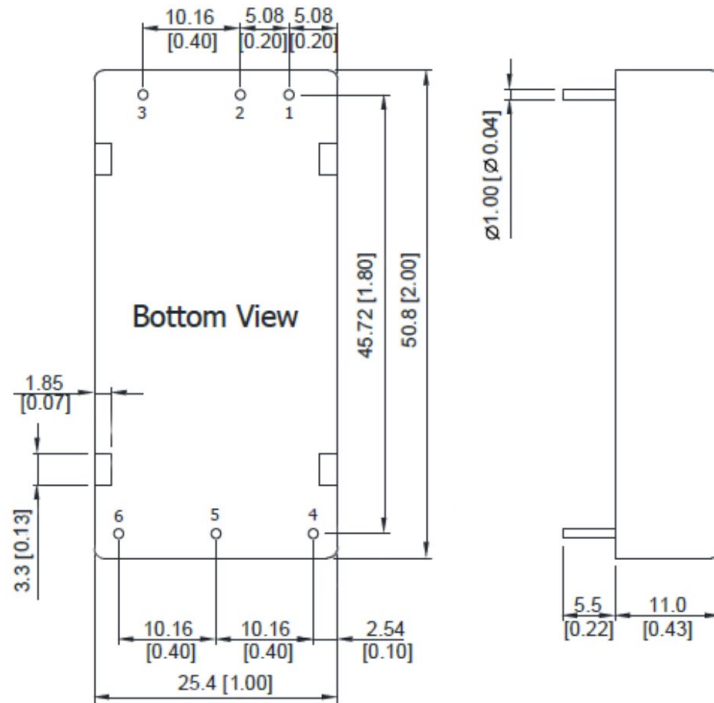


PIN CONNECTIONS

PIN	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout


All dimensions in mm (inches)
Tolerance: X.X±0.75 (X.XX±0.03)
X.XX±0.25 (X.XXX±0.01)
Pin Diameter $\varnothing 1.0 \pm 0.05$ (0.04±0.002)

HEATSINK OPTIONS

Standard

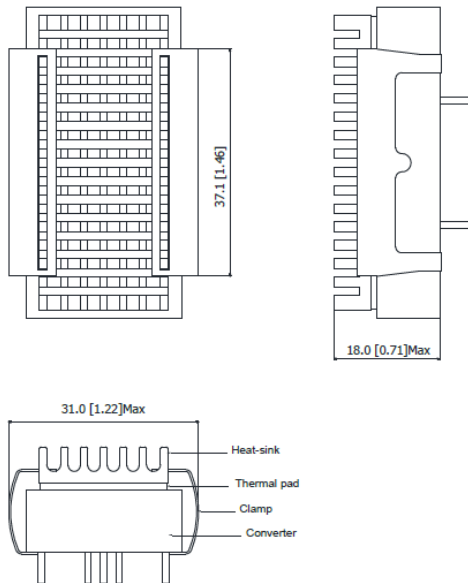

"A" Pinning

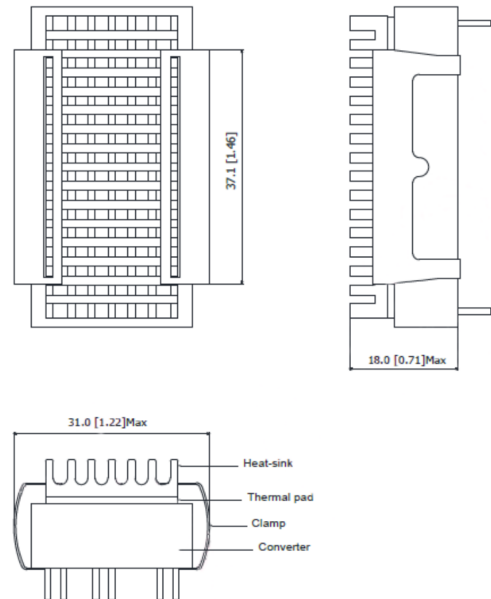


Heatsink Material: Aluminum
Finish: Black Anodized Coating
Weight: 9g

Advantages of Heatsink: Improve heat dissipation and increase stability and reliability of converter at high operating temperature.

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

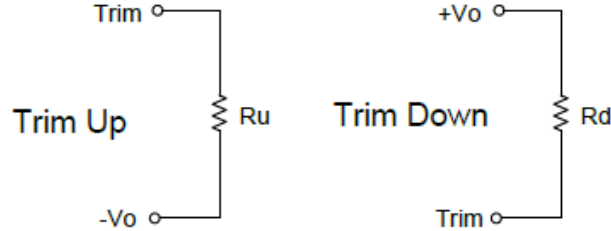

MRW10-XXS05 Trim Table

Trim Down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	137.88	61.93	36.61	23.95	16.35	11.29	7.67	4.96	2.85	1.16	KOhms
Trim Up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	108.09	48.39	28.49	18.54	12.56	8.58	5.74	3.61	1.95	0.62	KOhms

MRW10-XXS12 Trim Table

Trim Down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	419.81	187.68	110.30	71.61	48.40	32.93	21.87	13.58	7.13	1.98	KOhms
Trim Up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	344.74	154.37	90.92	59.19	40.15	27.46	18.39	11.59	6.31	2.07	KOhms

MRW10-XXS15

Trim Down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	602.92	269.91	158.91	103.41	70.10	47.90	32.05	20.15	10.90	3.50	KOhms
Trim Up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	482.88	215.89	126.89	82.40	55.70	37.90	25.18	15.65	8.23	2.30	KOhms


MRW10-XXS24

Trim Down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	598.97	267.93	157.59	102.42	69.31	47.25	31.48	19.66	10.46	3.11	KOhms
Trim Up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	486.83	217.87	128.21	83.38	56.49	38.56	25.75	16.14	8.67	2.69	KOhms

TEST SETUP

Peak-to-Peak Output Noise Measurement Test

Use a 1µF ceramic capacitor and a 10µF tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20MHz. Position the load between 50mm and 75mm from the DC/DC converter.

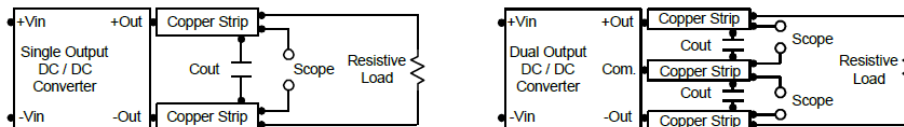

TECHNICAL NOTES

Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the $-V_{in}$ terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 3) during a logic low is -100 μ A.

Overload Protection


To protect hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR <1.0 Ω at 100KHz) capacitor of 4.7 μ F for the 24V input devices, a 2.2 μ F for the 48V devices and a 1 μ F for the 110V devices.

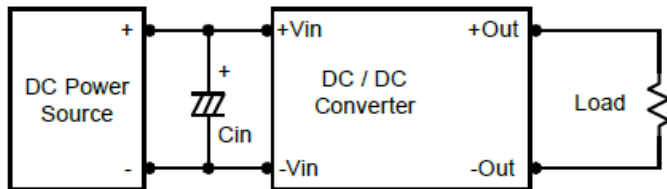

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.

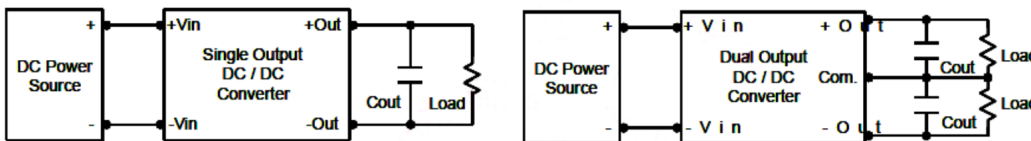


Maximum Capacitive Load

The MRW10 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module, and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

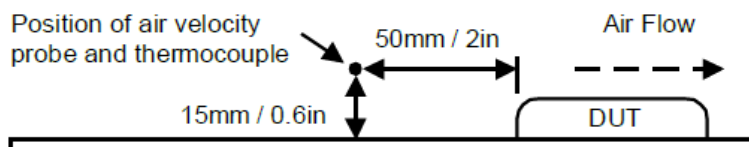

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.