



Size:
2.00 x 1.00 x 0.40 inches
(50.8 x 25.4 x 10.2 mm)

Applications:

- Railway Systems
- Wireless Networks
- Telecom/Datacom
- Industry Control Systems
- Distributed Power Architectures
- Semiconductor Equipment

FEATURES

- Input Under Voltage Protection
- High Efficiency up to 92%
- Remote ON/OFF Control
- 4:1 Ultra Wide Input Voltage Ranges
- Six-Sided Continuous Shielding
- Low Stand-by Power Consumption
- No Minimum Load Required
- Single and Dual Outputs
- 40 Watts Maximum Output Power
- EN50155 & EN45545-2 Railway Standards
- 1600VDC I/O Isolation for 24Vin and 48Vin, 3000VDC I/O Isolation for 110Vin
- Short Circuit, Over Voltage, Over Load, & Over Temp. Protection
- Wide Operating Temperature Range: -40°C to +85°C
- CE Marked
- Compliant to RoHS II & REACH
- EN60950-1, UL60950-1, IEC60950-1, EN62368-1, UL62368-1, and IEC62368-1 Safety Approvals
- Optional Heatsink Available (Suffix "HS")

DESCRIPTION

The CRW series of DC/DC power converters provides 40 Watts of output power in an industry standard 2.00" x 1.00" x 0.40" package and footprint. This series has single and dual output models with 4:1 ultra wide input voltage ranges of 9-36VDC, 18-75VDC, and 43-160VDC. Some features include high efficiency up to 92%, high isolation, six-sided shielding, and remote ON/OFF control. These converters are also protected against short circuit, over voltage, over load, and over temperature conditions. All models are RoHS II & REACH compliant and have EN60950-1, UL60950-1, IEC60950-1, EN62368-1, UL62368-1, and IEC62368-1 safety approvals. This series is best suited for use in wireless networks, industry control systems, telecom/datacom, semiconductor equipment, distributed power architectures, and railway systems.

MODEL SELECTION TABLE

SINGLE OUTPUT MODELS

Model Number	Input Voltage Range	Output Voltage	Output Current		Output Ripple & Noise	No Load Input Current	Output Power	Efficiency	Maximum Capacitive Load
			Min Load	Max Load					
CRW24S33-33	24 VDC (9 - 36 VDC)	3.3 VDC	0mA	10A	75mVp-p	15mA	33W	90%	26600µF
CRW24S05-40		5 VDC	0mA	8A	75mVp-p	15mA	40W	91%	20000µF
CRW24S12-40		12 VDC	0mA	3.333A	100mVp-p	15mA	40W	92%	3900µF
CRW24S15-40		15 VDC	0mA	2.666A	100mVp-p	15mA	40W	92%	2600µF
CRW24S24-40		24 VDC	0mA	1.666A	150mVp-p	15mA	40W	91%	1300µF
CRW48S33-33	48 VDC (18 - 75 VDC)	3.3 VDC	0mA	10A	75mVp-p	10mA	33W	90%	26600µF
CRW48S05-40		5 VDC	0mA	8A	75mVp-p	10mA	40W	91%	20000µF
CRW48S12-40		12 VDC	0mA	3.333A	100mVp-p	10mA	40W	92%	3900µF
CRW48S15-40		15 VDC	0mA	2.666A	100mVp-p	10mA	40W	92%	2600µF
CRW48S24-40		24 VDC	0mA	1.666A	150mVp-p	10mA	40W	91%	1300µF
CRW110S33-33	110 VDC (43 - 160 VDC)	3.3 VDC	0mA	10A	75mVp-p	10mA	33W	88%	26600µF
CRW110S05-40		5 VDC	0mA	8A	75mVp-p	10mA	40W	89%	20000µF
CRW110S12-40		12 VDC	0mA	3.333A	100mVp-p	10mA	40W	90.5%	3900µF
CRW110S15-40		15 VDC	0mA	2.666A	100mVp-p	10mA	40W	91%	2600µF
CRW110S24-40		24 VDC	0mA	1.666A	150mVp-p	10mA	40W	90%	1300µF

MODEL SELECTION TABLE

DUAL OUTPUT MODELS

Model Number	Input Voltage Range	Output Voltage	Output Current		Output Ripple & Noise	No Load Input Current	Output Power	Efficiency	Maximum Capacitive Load
			Min Load	Max Load					
CRW24D12-40	24 VDC (9 - 36 VDC)	±12 VDC	0mA	±1.666A	100mVp-p	15mA	40W	90%	±2600µF
CRW24D15-40		±15 VDC	0mA	±1.333A	100mVp-p	15mA	40W	90%	±1600µF
CRW24D24-40		±24 VDC	0mA	±0.833A	150mVp-p	15mA	40W	91%	±650µF
CRW48D12-40	48 VDC (18 - 75 VDC)	±12 VDC	0mA	±1.666A	100mVp-p	10mA	40W	90%	±2600µF
CRW48D15-40		±15 VDC	0mA	±1.333A	100mVp-p	10mA	40W	90%	±1600µF
CRW48D24-40		±24 VDC	0mA	±0.833A	150mVp-p	10mA	40W	91%	±650µF
CRW110D12-40	110 VDC (43 - 160 VDC)	±12 VDC	0mA	±1.666A	100mVp-p	10mA	40W	89%	±2600µF
CRW110D15-40		±15 VDC	0mA	±1.333A	100mVp-p	10mA	40W	89%	±1600µF
CRW110D24-40		±24 VDC	0mA	±0.833A	150mVp-p	10mA	40W	91%	±650µF

SPECIFICATIONS: CRW SERIES

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit
INPUT SPECIFICATIONS						
Input Voltage Range	24VDC nominal input models		9	24	36	VDC
	48VDC nominal input models		18	48	75	
	110VDC nominal input models		43	110	160	
Start-Up Voltage	24VDC nominal input models				9	VDC
	48VDC nominal input models				18	
	110VDC nominal input models				43	
Shutdown Voltage	24VDC nominal input models			8		VDC
	48VDC nominal input models			16		
	110VDC nominal input models			40		
Input Surge Voltage (1sec, max.)	24VDC nominal input models				50	VDC
	48VDC nominal input models				100	
	110VDC nominal input models				170	
Input Current	No Load		See Table			
Input Filter	Pi type					
OUTPUT SPECIFICATIONS						
Output Voltage	See Table					
Voltage Accuracy			-1.0		+1.0	%
Line Regulation	Low line to high line at full load		-0.2		+0.2	%
Load Regulation	No load to full load	Single Output Models	-0.5		+0.5	%
		Dual Output Models	-1.0		+1.0	
Cross Regulation	Asymmetrical load 25% / 100% FL, Dual Output Models		-5.0		+5.0	%
Voltage Adjustability	Single Output Models	3.3V, 5V, & 12V Output Models	-10		+10	%
		15V & 24V Outputs Models	-10		+20	
Output Power	See Table					
Output Current	See Table					
Maximum Capacitive Load	Minimum input and constant resistive load See Table					
Ripple & Noise	Measured by 20MHz bandwidth and with a 0.1µF/50V X7R MLCC capacitor	3.3V & 5V Output Models		75	100	mVp-p
		12V & 15V Output Models		100	125	
		24V Output Models		150	200	
Transient Response Recovery Time	25% load step change			250		µs
Start-Up Time	Constant resistive load	Power Up		60		ms
		Remote On/Off		60		
Temperature Coefficient			-0.02		+0.02	%/°C
PROTECTION						
Short Circuit Protection	Continuous, automatic recovery					
Over Load Protection	% of rated Iout; hiccup mode			150		%
Over Voltage Protection	Zener diode clamp	3.3V Output Models		3.9		VDC
		5V Output Models		6.2		
		12V Output Models		15		
		15V Output Models		20		
		24V Output Models		30		
Over Temperature Protection				+115		°C
GENERAL SPECIFICATIONS						
Efficiency	Nominal input voltage and full load		See Table			
Switching Frequency			225	250	275	kHz
Isolation Voltage	1 minute	110Vin(nom)	Input to Output	3000		VDC
			Input (Output) to Case	1600		
		Others	Input to Output	1600		VDC
			Input (Output) to Case	1600		
Isolation Resistance	500VDC		1			GΩ
Isolation Capacitance					1500	pF
REMOTE ON/OFF (See Note 3)						
Positive Logic (standard)	Referenced to -Vin pin	DC/DC ON	Open or 3V ~ 12 VDC			
		DC/DC OFF	Short or 0 ~ 1.2 VDC			
Negative Logic (optional)	Referenced to -Vin pin	DC/DC ON	Short or 0 ~ 1.2 VDC			
		DC/DC OFF	Open or 3V ~ 12 VDC			
Input Current of Remote Control Pin	Nominal Vin		-0.5		+0.5	mA
Remote OFF State Input Current	Nominal Vin			3		mA

SPECIFICATIONS: CRW SERIES


All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION		TEST CONDITIONS		Min	Typ	Max	Unit
ENVIRONMENTAL SPECIFICATIONS							
Operating Ambient Temperature	See derating curves		-40		+85		°C
Maximum Case Temperature					+105		°C
Storage Temperature			-55		+125		°C
Thermal Impedance (See Note 4)	Vertical Direction by Natural Convection (20LFM)	Without Heatsink			10.8		°C/W
		With Heatsink			10.3		
Relative Humidity			5		95		% RH
Thermal Shock			EN61373, MIL-STD-810F				
Vibration			EN61373, MIL-STD-810F				
MTBF	BELLCORE TR-NWT-000332 Case 1: 50% Stress, Ta=40°C		2,661,000 hours				
	MIL-HDBK-217F, full load		907,300 hours				
PHYSICAL SPECIFICATIONS							
Weight			1.13oz (32g)				
Dimensions (L x W x H)			2.00x1.00x0.40 inch (50.8x25.4x10.2 mm)				
Case Material			Copper				
Base Material			FR4 PCB				
Potting Material			Silicon (UL94-V0)				
Shielding			Six-sided Continuous				
SAFETY & EMC CHARACTERISTICS							
Safety Approvals (See Note 5)			EN60950-1, UL60950-1, IEC60950-1, EN62368-1, UL62368-1, IEC62368-1				
EMI (See Note 1)	EN55011, EN55022		Class A				
ESD	EN61000-4-2	Air ±8kV Contact ±6kV	Perf. Criteria A				
Radiated Immunity	EN61000-4-3	20 V/m	Perf. Criteria A				
Fast Transient (See Note 2)	EN61000-4-4	±2kV	Perf. Criteria A				
Surge (See Note 2)	EN61000-4-5	±2kV	Perf. Criteria A				
Conducted Immunity	EN61000-4-6	10 Vrms	Perf. Criteria A				
Power Frequency Magnetic Field	EN61000-4-8	100A/m continuous; 1000/m 1 second	Perf. Criteria A				


NOTES

- The CRW series can only meet EMI Class A or Class B with external components added. Please contact factory for more information.
 - An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
For 24VDC nominal input models we recommend connecting an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/1000V) and a TVS (SMDJ58V, 3000 Watt peak pulse power) to connect in parallel.
For 48VDC nominal input models we recommend connecting an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V) and a TVS (SMDJ58A, 58V, 3000 Watt peak pulse power) to connect in parallel.
For 110VDC nominal input models we recommend connecting three aluminum electrolytic capacitors (Ruby-con BXF series, 68µF/200V 3pcs in parallel) connected) (SMDJ90A, 90V, 3000 Watt peak pulse power 2pcs in series connection) to connect in parallel.
 - Both positive logic and negative logic remote ON/OFF control is available. Positive logic remote ON/OFF comes standard; for negative logic remote ON/OFF add the suffix "R" to the model number (Ex: CRW48S05-40R).
 - Test by minimum input and constant resistive load. Optional heatsink is available. Please call factory for ordering details.
 - This product is Listed to applicable standards and requirements by UL.
- CAUTION:** This power module is not internally fused. An input line fuse must always be used.
Due to advances in technology, specifications subject to change without notice.

DERATING CURVES


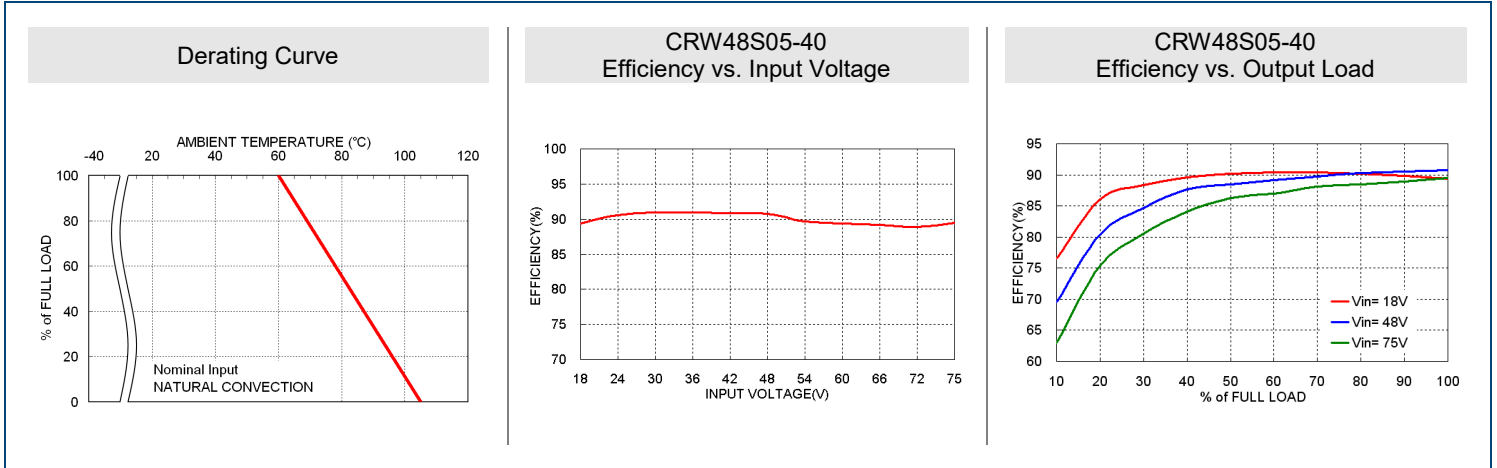


MECHANICAL DRAWING

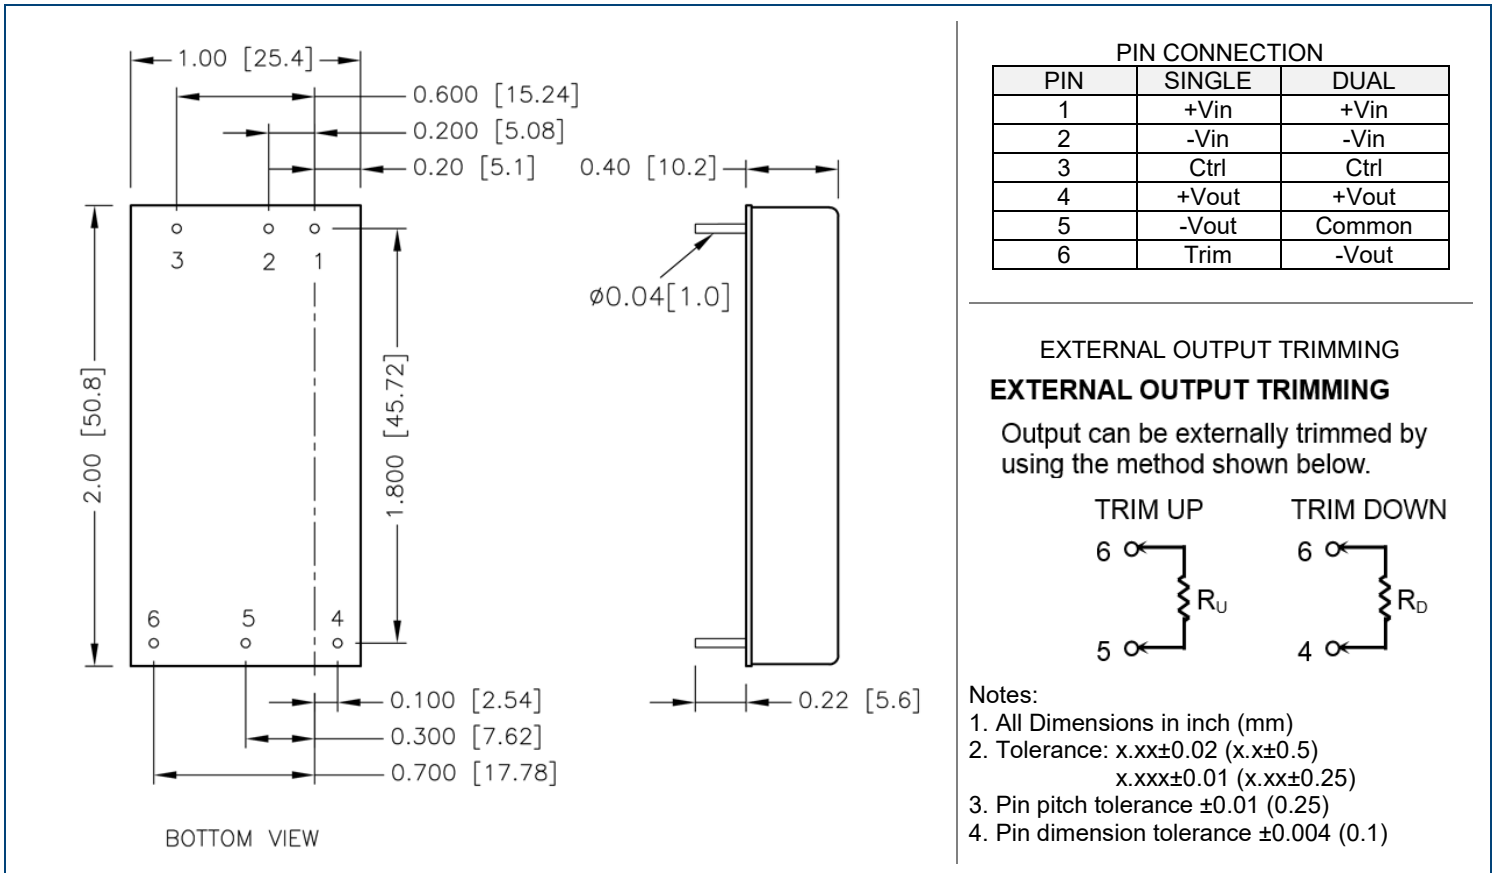

RECOMMENDED EMI FILTER

Suggested Schematic for EN55022 Conducted Emission Class A Limits

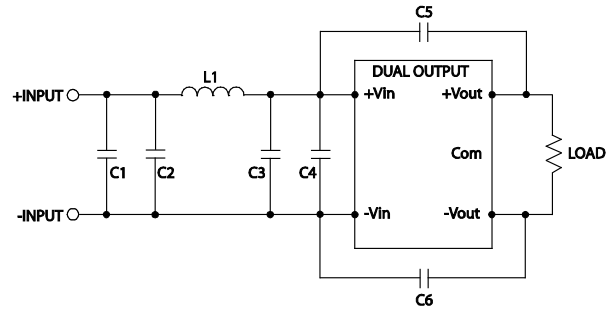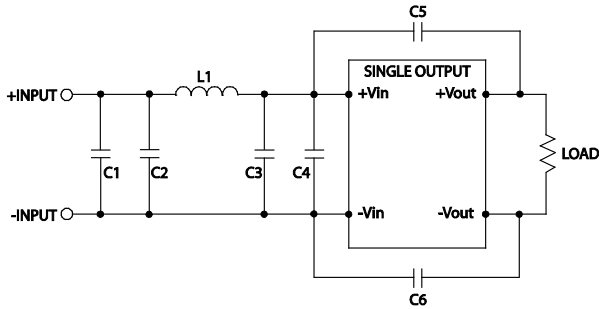

In order to meet conducted emissions EN55022 Class A the following components are needed.

In order to meet conducted emissions EN55022 Class A the following components are needed.

SINGLE OUTPUT MODELS						
Model	C1	C2	C3	C4	C5, C6	L1
CRW24SXX-40	N/A	6.8µF/50V 1812 MLCC	N/A	6.8µF/50V 1812 MLCC	1000pF/2KV 1206 MLCC	2.2µH SMD Inductor PMT-097
CRW48SXX-40	N/A	4.7µF/50V 1812 MLCC	N/A	4.7µF/50V 1812 MLCC	1000pF/2KV 1206 MLCC	10µH SMD Inductor PMT-070
CRW110SXX-40	Ruby-con BXF series 68µF/200V	N/A	1µF/250V 1812 MLCC	1µF/250V 1812 MLCC	1000pF/2KV 1206 MLCC	22µH SMD Inductor PMT-098

DUAL OUTPUT MODELS						
Model	C1	C2	C3	C4	C5, C6	L1
CRW24DXX-40	N/A	6.8µF/50V 1812 MLCC	N/A	6.8µF/50V 1812 MLCC	1000pF/2KV 1206 MLCC	2.2µH SMD Inductor PMT-097
CRW48DXX-40	N/A	4.7µF/50V 1812 MLCC	N/A	4.7µF/50V 1812 MLCC	1000pF/2KV 1206 MLCC	10µH SMD Inductor PMT-070
CRW110DXX-40	Ruby-con BXF series 68µF/200V	N/A	1µF/250V 1812 MLCC	1µF/250V 1812 MLCC	1000pF/2KV 1206 MLCC	22µH SMD Inductor PMT-098

MODEL NUMBER SETUP

CRW	48	S	05	-	40	R	H
Series Name	Input Voltage	Output Quantity	Output Voltage		Output Power	Remote ON/OFF	Heatsink
	24: 9-36 VDC 48: 18-75 VDC 110: 43-160 VDC	S: Single Output D: Dual Output	33: 3.3 VDC 05: 5 VDC 12: 12 VDC 15: 15 VDC 24: 24 VDC 12: ±12 VDC 15: ±15 VDC 24: ±24 VDC		33: 33 Watts 40: 40 Watts	Blank: Positive Logic R: Negative Logic	Blank: No Heatsink H: Heatsink HC: Heatsink with clamp

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.