

Single Output Models



Size: 0.50 x 0.37 x 0.35 inches (12.7 x 9.3 x 8.9 mm)

Dual Output Models



Size: 0.60 x 0.37 x 0.35 inches (15.3 x 9.3 x 8.9 mm)

FEATURES

- Up to 2 Watts Output Power
- Single & Dual Outputs
- 1000VDC I/O Isolation
- High Accuracy of Pin Planarity
- MTBF > 2,000,000 Hours
- -40°C to +85°C Operating Temperature
- SMT Package with Industry Standard Pin-out
- Qualified for Lead-free Reflow Solder Processes According to IPC/JEDEC J-STD-020D
- Tape & Reel Packaging Available

DESCRIPTION

The DCMSAU2 series of DC/DC converters provides 2 Watts of output power in a miniature SMT package. These converters operate over input voltage ranges of 4.5~5.5VDC, 10.8~13.2VDC, and 21.6~26.4VDC. This series also has single and dual output voltages of 5V, 12V, ±5V, ±12V, and ±15VDC. The DCMSAU2 series' impressive efficiencies enable these modules to deliver their fully rated output power from -40°C to +80°C without a heatsink or forced-air cooling. The very small footprint of these converters makes them an ideal solution for many applications where a voltage has to be isolated such as for noise reduction, ground loop elimination in digital interfaces, or where a converted voltage is required. These converters are also fully qualified for the higher temperature profile used in lead-free reflow solder processes. These converters can also be supplied in tape&reel packaging for use in automated SMD production lines.

MODEL SELECTION TABLE

SINGLE OUTPUT MODELS

| Model Number | Input Voltage | Output Voltage | Output Current | | Input Current | | Load Regulation | Output Power | Efficiency | Maximum Capacitive Load |
|--------------|-----------------------------|----------------|----------------|-------|---------------|----------|-----------------|--------------|------------|-------------------------|
| | | | Min | Max | No Load | Max Load | | | | |
| DCMSAU505-2 | 5 VDC (4.5 – 5.5 VDC) | 5 VDC | 8mA | 400mA | 60mA | 519mA | 11% | 2W | 77% | 47µF |
| DCMSAU512-2 | | 12 VDC | 3mA | 165mA | | 488mA | 11% | 2W | 81% | 10µF |
| DCMSAU1205-2 | 12 VDC (10.8 – 13.2 VDC) | 5 VDC | 8mA | 400mA | 30mA | 213mA | 8% | 2W | 78% | 47µF |
| DCMSAU1212-2 | | 12 VDC | 3mA | 165mA | | 201mA | 6% | 2W | 82% | 10µF |
| DCMSAU2405-2 | 24 VDC (21.6 – 26.4 VDC) | 5 VDC | 8mA | 400mA | 15mA | 106mA | 8% | 2W | 78% | 47µF |
| DCMSAU2412-2 | | 12 VDC | 3mA | 165mA | | 101mA | 5% | 2W | 81% | 10µF |

DUAL OUTPUT MODELS

| Model Number | Input Voltage | Output Voltage | Output Current | | Input Current | | Load Regulation | Output Power | Efficiency | Maximum Capacitive Load |
|---------------|-----------------------------|----------------|----------------|--------|---------------|----------|-----------------|--------------|------------|-------------------------|
| | | | Min | Max | No Load | Max Load | | | | |
| DCMSAU505D-2 | 5 VDC (4.5 – 5.5 VDC) | ±5 VDC | ±4mA | ±200mA | 60mA | 519mA | 12% | 2W | 77% | ±10µF |
| DCMSAU512D-2 | | ±12 VDC | ±1.5mA | ±83mA | | 504mA | 7% | 2W | 79% | ±4.7µF |
| DCMSAU515D-2 | | ±15 VDC | ±1mA | ±66mA | | 501mA | 7% | 2W | 79% | ±4.7µF |
| DCMSAU1212D-2 | 12 VDC (10.8 – 13.2 VDC) | ±12 VDC | ±1.5mA | ±83mA | 30mA | 202mA | 5% | 2W | 82% | ±4.7µF |
| DCMSAU1215D-2 | | ±15 VDC | ±1mA | ±66mA | | 201mA | 5% | 2W | 82% | ±4.7µF |
| DCMSAU2412D-2 | 24 VDC (21.6 – 26.4 VDC) | ±12 VDC | ±1.5mA | ±83mA | 15mA | 102mA | 5% | 2W | 81% | ±4.7µF |
| DCMSAU2415D-2 | | ±15 VDC | ±1mA | ±66mA | | 100mA | 5% | 2W | 82% | ±4.7µF |

NOTES


1. The DCMSAU2 series requires a minimum output loading to maintain specified regulations. Operation under no-load conditions will not damage these devices; however they may not meet all listed specifications.
 2. All DC/DC converters should be externally fused at the front end for protection.
 3. Other input and output voltages may be available, please contact factory.
- *Due to advances in technology, specifications are subject to change without notice.*

SPECIFICATIONS: DCMSAU2 SERIES

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.


| SPECIFICATION | TEST CONDITIONS | Min | Typ | Max | Unit |
|---------------------------------------|--------------------------------------------|---------------------------------------------------|-------|-------|--------|
| INPUT SPECIFICATIONS | | | | | |
| Input Voltage Range | 5VDC nominal input models | 4.5 | 5 | 5.5 | VDC |
| | 12VDC nominal input models | 10.8 | 12 | 13.2 | |
| | 24 VDC nominal input models | 21.6 | 24 | 26.4 | |
| Input Surge Voltage (1sec, max.) | 5VDC nominal input models | -0.7 | | 9 | VDC |
| | 12VDC nominal input models | -0.7 | | 18 | |
| | 24 VDC nominal input models | -0.7 | | 30 | |
| Reverse Polarity Input Current | | | | 0.3 | A |
| Input Current | | See Table | | | |
| Internal Power Dissipation | | | | 650 | mW |
| Input Filter | | Internal capacitor | | | |
| Input Fuse | 5VDC nominal input models | 1000mA slow-blow type | | | |
| | 12VDC nominal input models | 500mA slow-blow type | | | |
| | 24 VDC nominal input models | 200mA slow-blow type | | | |
| OUTPUT SPECIFICATIONS | | | | | |
| Output Voltage | | See Table | | | |
| Output Voltage Accuracy | | | ±1.5 | ±4.0 | % |
| Output Voltage Balance (Dual Outputs) | Balanced loads | | ±0.1 | ±1.0 | % |
| Line Regulation | For Vin change of 1% | | ±1.2 | ±1.5 | % |
| Load Regulation | 20% load to 100% load | See Table | | | |
| Output Power | | | | 2 | W |
| Output Current | | See Table | | | |
| Minimum Load | See Note 1 | See Table | | | |
| Maximum Capacitive Load | | See Table | | | |
| Ripple & Noise (20MHz) | Over line, over load, and over temperature | | 100 | 120 | mVp-p |
| | | | | 200 | mVp-p |
| | | | | 15 | mV rms |
| Temperature Coefficient | | | ±0.01 | ±0.02 | %/°C |
| PROTECTION | | | | | |
| Short Circuit Protection | | | | 0.5 | s |
| GENERAL SPECIFICATIONS | | | | | |
| Efficiency | Nominal input voltage and full load | See Table | | | |
| Switching Frequency | | 50 | 100 | 120 | KHz |
| Isolation Voltage (I/P to O/P) | 60 seconds | 1000 | | | |
| Isolation Resistance (I/P to O/P) | 500VDC | 1000 | | | |
| Isolation Capacitance (I/P to O/P) | 100KHz, 1V | | 60 | 100 | pF |
| ENVIRONMENTAL SPECIFICATIONS | | | | | |
| Operating Ambient Temperature | See derating curve | -40 | | +85 | °C |
| Case Temperature | | | | +90 | °C |
| Storage Temperature | | -50 | | +125 | °C |
| Relative Humidity | Non-condensing | | | 95 | % RH |
| Cooling | | Free air convection | | | |
| Lead Temperature | 1.5mm from case for 10 sec. | | | 300 | °C |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD-020D | Level 3 | | | |
| MTBF | MIL-HDBK-217F at 25°C, ground benign | 2,000,000 hours | | | |
| PHYSICAL SPECIFICATIONS | | | | | |
| Weight | Single Output Models | 0.05oz (1.5g) | | | |
| | Dual Output Models | 0.08oz (2.2g) | | | |
| Dimensions (L x W x H) | Single Output Models | 0.50 x 0.37 x 0.34 inch (12.7 x 9.3 x 8.65 mm) | | | |
| | Dual Output Models | 0.60 x 0.37 x 0.34 inch (15.3 x 9.3 x 8.65 mm) | | | |
| Case Material | Flammability to UL 94V-0 rated | Molding | | | |

DERATING CURVE

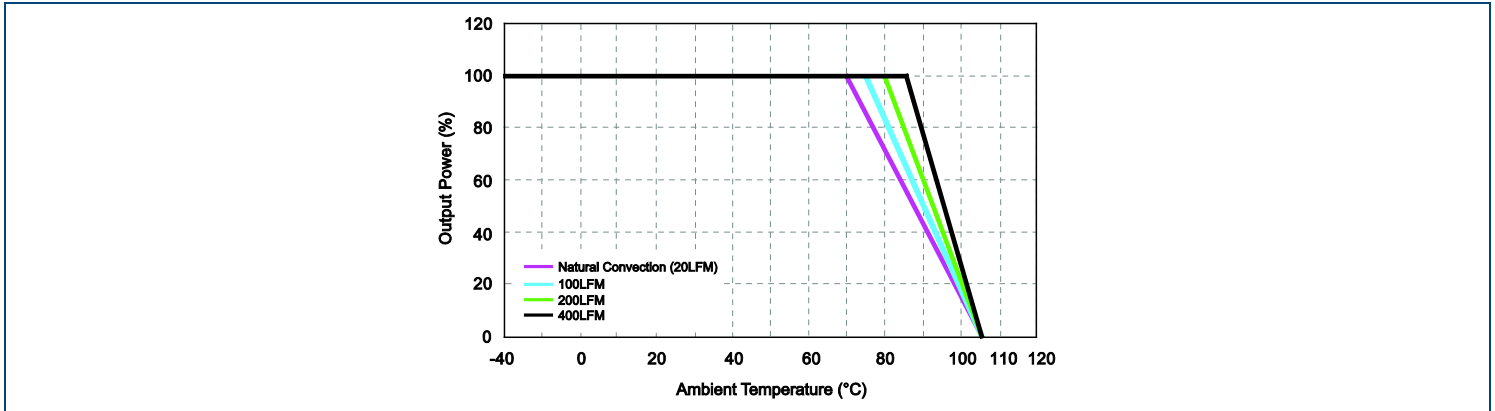

MECHANICAL DRAWINGS


Single Output Models





| PIN CONNECTIONS | |
|-----------------|--------|
| PIN | SINGLE |
| 1 | -Vin |
| 2 | +Vin |
| 4 | -Vout |
| 5 | +Vout |
| 7 | No Pin |
| 8 | NA |
| 10 | No Pin |

- Notes:
- Unit: inches [mm]
 - Tolerance: X.XX±0.01 [X.X±0.25]
X.XXX±0.005 [X.XX±0.13]
 - Pin Tolerance: ±0.002 [±0.05]
 - Weight: 0.05oz (1.5g)
 - All dimensions are for reference only


N/A: Not available for electrical connection



CONNECTING PIN PATTERNS

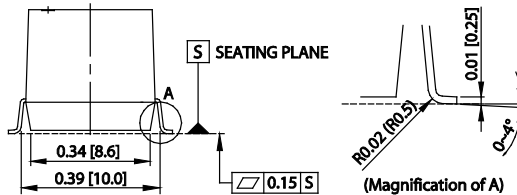


Dual Output Models

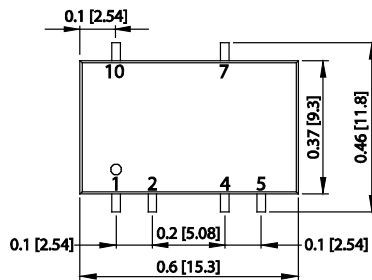



| PIN CONNECTIONS | |
|-----------------|--------|
| PIN | DUAL |
| 1 | -Vin |
| 2 | +Vin |
| 4 | Common |
| 5 | -Vout |
| 7 | +Vout |
| 8 | No Pin |
| 10 | NA |

- Notes:
- Unit: inches [mm]
 - Tolerance: X.XX±0.01 [X.X±0.25]
X.XXX±0.005 [X.XX±0.13]
 - Pin Tolerance: ±0.002 [±0.05]
 - Weight: 0.08oz (2.2g)
 - All dimensions are for reference only

N/A: Not available for electrical connection

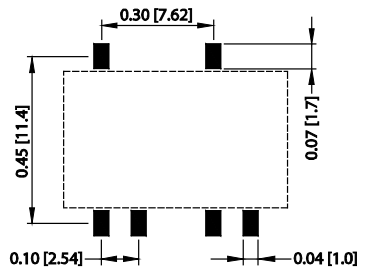


CONNECTING PIN PATTERNS

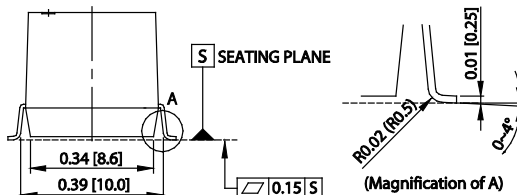

DESIGN CONSIDERATIONS


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} ($4.7\mu H$) and C_{in} ($220\mu F$, $ESR < 1.0\Omega$ at 100 KHz) to simulate source impedance. Capacitor C_{in} offsets possible battery impedance. Current ripple is measured at the input terminals of the module. Measurement bandwidth is 0-500 KHz.

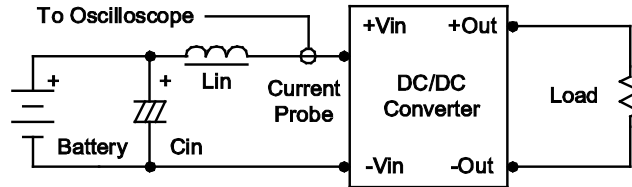

Peak-to-Peak Output Noise Measurement Test

Use a $0.33\mu F$ ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20MHz. Position the load between 50mm and 75mm from the DC/DC converter.

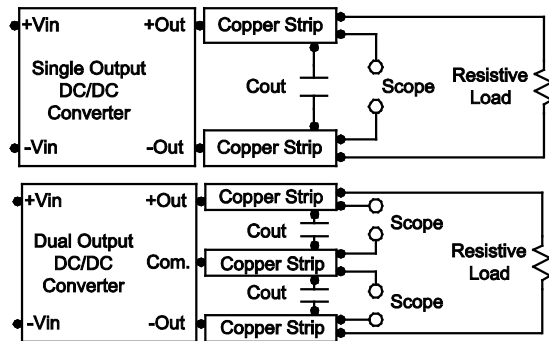


TEST SETUP

Maximum Capacitive Load

The DCMSAU2 series has a limitation of maximum connected capacitance on the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the start-up time. The maximum capacitance can be found in the Model Selection Table.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance ($ESR < 1.0\Omega$ at 100 KHz) capacitor of $2.2\mu F$ for 5VDC input models, $1.0\mu F$ for 12VDC input models, and $0.47\mu F$ for 24VDC input models.

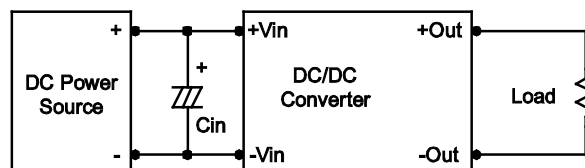

Output Ripple Reduction


A good quality low ESR capacitor placed as close as possible across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 1.5µF capacitors at the output.

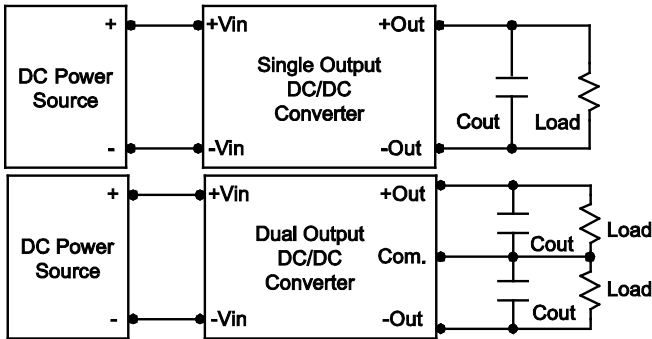

TEST SETUP

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module, and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C. The derating curves are determined from measurements obtained in a test setup.

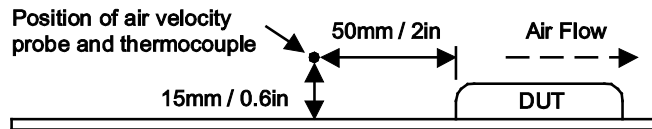

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
 Toll Free: ☎(888)597-9255
 Fax: ☎(603)778-9797
 E-mail: sales@wallindustries.com
 Web: www.wallindustries.com
 Address: 37 Industrial Drive
 Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.