



Size:  
2.28 x 1.45 x 0.50 inches  
(57.9 x 36.8 x 12.7 mm)

**Applications:**

- Automation
- Telecom/Datacom
- Industry Control Systems
- IPC
- Measurement

**FEATURES**

- Soft Start
- Single Outputs
- Input Under Voltage Protection
- High Efficiency up to 92%
- Remote ON/OFF Control
- 2:1 Wide Input Voltage Ranges
- No Minimum Load Required
- 2250VDC I/O Basic Insulation
- Voltage Adjustability
- Low Stand-by Power Consumption
- Industry Standard Quarter-brick Package
- Up to 150 Watts Maximum Output Power
- Short Circuit, Over Voltage, Over Load, & Over Temp. Protection
- UL60950-1, EN60950-1, and IEC60950-1 Safety Approvals
- CE Marked
- RoHS & REACH Compliant
- Optional Heatsinks Available (Suffix "HS")
- Threaded (Standard) or Thru-Hole (Optional) Inserts Available

**DESCRIPTION**

The DCQA150 series of DC/DC power converters provides up to 150 Watts of output power in a 2.28" x 1.45" x 0.5" industry standard quarter-brick package. This series has single output models with 2:1 wide input voltage ranges of 8.5-22VDC, 16.5-36VDC, and 33-75VDC. Some features include high efficiency up to 92%, 2250VDC I/O basic insulation, and remote ON/OFF control. These converters are also protected against input under voltage, short circuit, over voltage, over load, and over temperature conditions. All models are RoHS compliant and have UL60950-1, EN60950-1, and IEC60950-1 safety approvals. Several different options are available for this series including negative logic remote ON/OFF, heatsinks, and thru-hole inserts.

**MODEL SELECTION TABLE**

Model Number	Input Voltage Range	Output Voltage	Output Current		Output Ripple & Noise	No Load Input Current	Output Power	Efficiency	Maximum Capacitive Load
			Min Load	Max Load					
DCQA150-12S33	12 VDC (8.5 - 22 VDC)	3.3 VDC	0mA	30A	75mVp-p	50mA	99W	89%	91000µF
DCQA150-12S05		5 VDC	0mA	24A	75mVp-p	50mA	120W	90%	48000µF
DCQA150-12S12		12 VDC	0mA	10A	100mVp-p	50mA	120W	91%	8300µF
DCQA150-12S15		15 VDC	0mA	8A	100mVp-p	50mA	120W	91%	5300µF
DCQA150-12S24		24 VDC	0mA	5A	200mVp-p	50mA	120W	90%	2100µF
DCQA150-12S30		30 VDC	0mA	4A	200mVp-p	50mA	120W	90%	1300µF
DCQA150-12S48	48 VDC	0mA	2.5A	300mVp-p	50mA	120W	89%	520µF	
DCQA150-24S33	24 VDC (16.5 - 36 VDC)	3.3 VDC	0mA	30A	75mVp-p	25mA	99W	89%	91000µF
DCQA150-24S05		5 VDC	0mA	24A	75mVp-p	25mA	120W	90%	48000µF
DCQA150-24S12		12 VDC	0mA	10A	100mVp-p	25mA	120W	91%	8300µF
DCQA150-24S15		15 VDC	0mA	8A	100mVp-p	25mA	120W	91%	5300µF
DCQA150-24S24		24 VDC	0mA	5A	200mVp-p	25mA	120W	91%	2100µF
DCQA150-24S30		30 VDC	0mA	4A	200mVp-p	25mA	120W	91%	1300µF
DCQA150-24S48	48 VDC	0mA	2.5A	300mVp-p	25mA	120W	89%	520µF	
DCQA150-48S33	48 VDC (33 - 75 VDC)	3.3 VDC	0mA	30A	75mVp-p	15mA	99W	89%	91000µF
DCQA150-48S05		5 VDC	0mA	25A	75mVp-p	15mA	125W	91%	50000µF
DCQA150-48S12		12 VDC	0mA	12A	100mVp-p	15mA	144W	90%	10000µF
DCQA150-48S15		15 VDC	0mA	10A	100mVp-p	15mA	150W	90%	6670µF
DCQA150-48S24		24 VDC	0mA	6A	200mVp-p	15mA	144W	92%	2500µF
DCQA150-48S30		30 VDC	0mA	5A	200mVp-p	15mA	150W	91%	1670µF
DCQA150-48S48	48 VDC	0mA	3A	300mVp-p	15mA	144W	92%	630µF	

**NOTES**

1. Input Source Impedance: The power modules will operate to specifications without external components, assuming that the source voltage has very low impedance and reasonable input voltage regulation. Highly inductive source impedances can affect the stability of the power module. Since real-world voltage sources have finite impedance, performance is improved by adding an external filter capacitor. We recommend using Nippon Chemi-con KY series, 100µF/100V.
2. Maximum output deviation is +10% inclusive of remote sense and trim. If remote sense is not being used, sense pins should connect to the output pins with the same polarity.
3. The DCQA150 series can only meet EMI Class A or Class B with external components added. Please contact factory for more information.
4. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. We recommend connecting 2pcs of aluminum electrolytic capacitors (Nippon chemi-con KY series, 220µF/100V).
5. Both positive logic and negative logic remote ON/OFF control is available. Positive logic remote ON/OFF comes standard; for negative logic remote ON/OFF add the suffix "R" to the model number (Ex: DCQA150-48S24R).
6. Optional heatsinks available. See page 5 for ordering details.
7. M3 x 0.5 threaded-thru inserts come standard. For Ø.126 thru-hole inserts add the suffix "TH" to the model number (Ex: DCQA150-48S24TH). Models with thru-hole inserts cannot be equipped with a heatsink.
8. BASE-PLATE GROUNDING: EMI can be reduced when you connect two screw bolts to shield plane.
9. This product is Listed to applicable standards and requirements by UL.

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.

*Due to advances in technology, specifications are subject to change without notice.*

**SPECIFICATIONS: DCQA150 SERIES**

All specifications are based on 25°C, Nominal Input Voltage, and Full Load unless otherwise noted.  
 We reserve the right to change specifications based on technological advances.


SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit
<b>INPUT SPECIFICATIONS</b>						
Input Voltage Range	12VDC nominal input models		8.5	12	22	VDC
	24VDC nominal input models		16.5	24	36	
	48VDC nominal input models		33	48	75	
Start-Up Voltage	12VDC nominal input models				9	VDC
	24VDC nominal input models				18	
	48VDC nominal input models				36	
Shutdown Voltage	12VDC nominal input models		7.3	7.7	8.1	VDC
	24VDC nominal input models		15.5	15.9	16.3	
	48VDC nominal input models		31.6	32	32.5	
Input Surge Voltage (1sec, max.)	12VDC nominal input models				30	VDC
	24VDC nominal input models				50	
	48VDC nominal input models				100	
Input Current	No Load		See Table			
Input Filter (See Note 1)			Pi type			
<b>OUTPUT SPECIFICATIONS</b>						
Output Voltage			See Table			
Voltage Accuracy			-1.0		+1.0	%
Line Regulation	Low line to high line at full load		-0.1		+0.1	%
Load Regulation	No load to full load	3.3V & 5V Output Models	-0.2		+0.2	%
		Others	-0.1		+0.1	
Voltage Adjustability	Maximum output deviation is inclusive of remote sense		-20		+10	%
Remote Sense (See Note 2)	% of Vo (nom)				10	%
Output Power			See Table			
Output Current			See Table			
Minimum Load			0			%
Maximum Capacitive Load	Minimum input and constant resistive load		See Table			
Ripple & Noise (20MHz BW)	Measured with a 22µF/25V X7R MLCC	3.3V & 5V Output Models		75		mVp-p
	Measured with a 22µF/25V X7R MLCC	12V & 15V Output Models		100		
	Measured with a 4.7µF/50V X7R MLCC	24V & 30V Output Models		200		
	Measured with a 2.2µF/100V X7R MLCC	48V Output Models		300		
Transient Response Recovery Time	25% load step change			250		µs
Start-Up Time	Constant resistive load	Power Up		75	100	ms
		Remote On/Off		75	100	
Temperature Coefficient			-0.02		+0.02	%/°C
<b>PROTECTION</b>						
Short Circuit Protection			Continuous, automatic recovery			
Over Load Protection	% of rated Iout; hiccup mode		110		140	%
Over Voltage Protection	% of Vo (nom); hiccup mode		115		130	%
Over Temperature Protection				+110		°C
<b>GENERAL SPECIFICATIONS</b>						
Efficiency	Nominal input voltage and full load		See Table			
Switching Frequency			270	300	330	kHz
Isolation Voltage	1 minute (basic insulation)	Input to Output	2250			VDC
		Input/Output to Base-plate	2250			VDC
Isolation Resistance	500VDC		1			GΩ
Isolation Capacitance					1500	pF
<b>REMOTE ON/OFF (See Note 5)</b>						
Positive Logic (standard)	Referenced to -Input pin	DC/DC ON	Open or 3~12 VDC			VDC
		DC/DC OFF	Short or 0~1.2VDC			
Negative Logic (optional)	Referenced to -Input pin	DC/DC ON	Short or 0~1.2 VDC			VDC
		DC/DC OFF	Open or 3~12VDC			
Input Current of Remote Control Pin	Nominal Vin		-0.5		1	mA
Remote OFF State Input Current	Nominal Vin			3		mA

**SPECIFICATIONS: DCQA150 SERIES**

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.  
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
<b>ENVIRONMENTAL SPECIFICATIONS</b>					
Operating Base-Plate Temperature		-40		+105	°C
Storage Temperature Range		-55		+125	°C
Thermal Impedance (See Note 6)	Vertical direction by natural convection (20LFM)		9		°C/W
	Without Heatsink		7.1		
	With 0.24" Height Heatsink		5.5		
	With 0.5" Height Heatsink		2.8		
Relative Humidity		5		95	% RH
Thermal Shock			MIL-STD-810F		
Vibration			MIL-STD-810F		
MTBF	MIL-HDBK-217F, full load		387,000 hours		
<b>PHYSICAL SPECIFICATIONS</b>					
Weight			2.26oz (64g)		
Dimensions (L x W x H)			2.28x1.45x0.50 inch (57.9x36.8x12.7 mm)		
Case Material			Aluminum base-plate with plastic case		
Potting Material			Silicon (UL94-V0)		
<b>SAFETY &amp; EMC CHARACTERISTICS</b>					
Safety Approvals		IEC60950-1, UL60950-1 <sup>(9)</sup> , EN60950-1			
EMI (See Note 3)	EN55032		Class A, Class B		
ESD	EN61000-4-2	Air ±8kV Contact ±6kV		Perf. Criteria A	
Radiated Immunity	EN61000-4-3	20 V/m		Perf. Criteria A	
Fast Transient (See Note 4)	EN61000-4-4	±2kV		Perf. Criteria A	
Surge (See Note 4)	EN61000-4-5	EN55024: ±2kV		Perf. Criteria A	
Conducted Immunity	EN61000-4-6	10 Vrms		Perf. Criteria A	
Power Frequency Magnetic Field	EN61000-4-8	100A/m continuous; 1000A/m 1 sec.		Perf. Criteria A	

**CHARACTERISTIC CURVES**

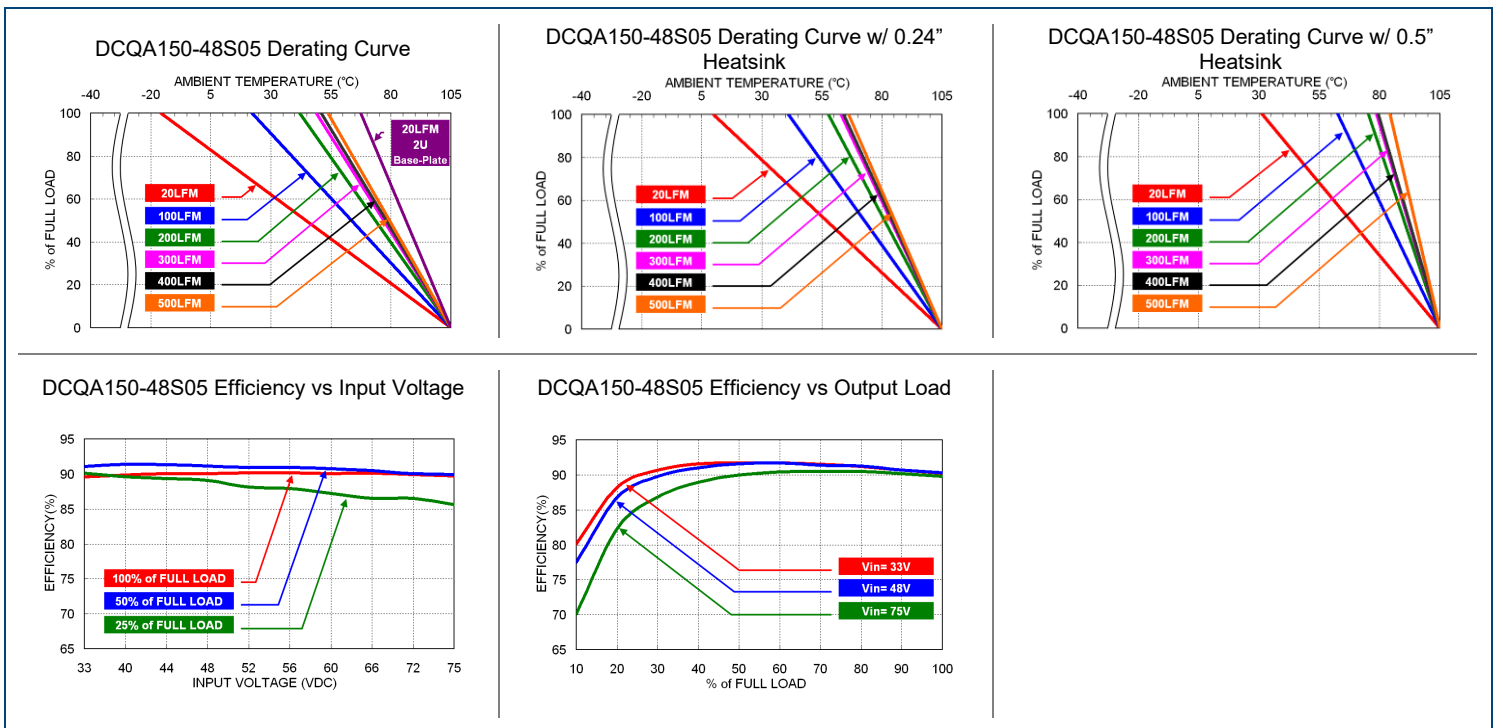

**OUTPUT VOLTAGE ADJUSTMENT**

Output is adjustable for 10% trim up or -20% trim down of nominal output voltage by connecting an external resistor between the TRIM pin and either the +SENSE or -SENSE pins.

With an external resistor between the TRIM and -SENSE pin, the output voltage set decreases.

With an external between the TRIM and +SENSE pin, the output voltage set point increases.

Maximum output deviation is +10% inclusive of remote sense. The external trim resistor needs to be at least 1/8W of rated power.


Trim Up Equation

$$R_U = \left( \frac{5.11V_{OUT}(100 + \Delta\%)}{1.225\Delta\%} - \frac{(511 + 10.22\Delta\%)}{\Delta\%} \right) k\Omega$$

Trim Down Equation

$$R_D = \left( \frac{511}{\Delta\%} - 10.22 \right) k\Omega$$

**TRIM UP**



**3.3VDC Output Models**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (k $\Omega$ )	869.117	436.331	292.07	219.939	176.66	147.808	127.198	111.742	99.72	90.103

**5VDC Output Models**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.40	5.45	5.50
RU (k $\Omega$ )	1585.35	797.994	535.542	404.316	325.58	273.09	235.596	207.476	185.605	168.109

**12VDC Output Models**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20
RU (k $\Omega$ )	4534.55	2287.19	1538.08	1163.52	938.78	788.956	681.939	601.676	539.25	489.309

**15VDC Output Models**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50
RU (k $\Omega$ )	5798.49	2925.42	1967.73	1488.89	1201.58	1010.04	873.229	770.619	690.812	626.966

**24VDC Output Models**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40
RU (k $\Omega$ )	9590.32	4840.11	3256.7	2465	1989.98	1673.3	1447.1	1277.45	1145.5	1039.94


**30VDC Output Models**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	30.3	30.6	30.9	31.2	31.5	31.8	32.1	32.4	32.7	33
RU (k $\Omega$ )	12118.2	6116.57	4116.02	3115.74	2515.58	2115.47	1829.68	1615.33	1448.62	1315.25

**48VDC Output Models**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	48.48	48.96	49.44	49.92	50.40	50.88	51.36	51.84	52.32	52.80
RU (k $\Omega$ )	19701.9	9945.94	6693.96	5067.97	4092.38	3441.99	2977.42	2628.99	2357.99	2141.19


**TRIM DOWN**



**All Outputs**

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
RD (k $\Omega$ )	500.78	245.28	160.113	117.53	91.98	74.947	62.78	53.655	46.558	40.88
$\Delta V$ (%)	11	12	13	14	15	16	17	18	19	20
RD (k $\Omega$ )	36.235	32.363	29.088	26.28	23.847	21.718	19.839	18.169	16.675	15.33

MECHANICAL DRAWING

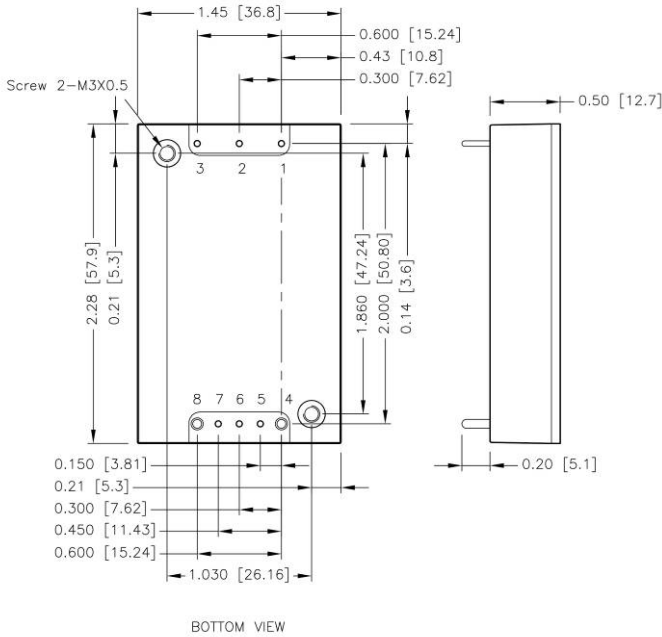


PIN	DEFINE	DIAMETER
1	-Vin	0.04 Inch
2	Ctrl	0.04 Inch
3	+Vin	0.04 Inch
4	-Vout	0.06 Inch
5	-Sense	0.04 Inch
6	Trim	0.04 Inch
7	+Sense	0.04 Inch
8	+Vout	0.06 Inch

Notes:

1. All dimensions in inch [mm]
2. Tolerance: x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]
3. Pin pitch tolerance ±0.01 [x.xx±0.25]
4. Pin dimension tolerance ±0.004 [0.10]
5. The screw locked torque: MAX 3.5kgf-cm [0.34N-m]

RECOMMENDED PAD LAYOUT

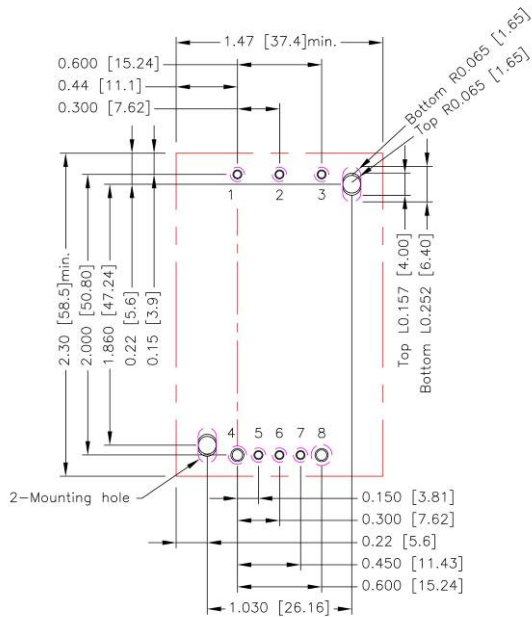

Notes:

- All dimensions in inch [mm]  
 Pad size (lead free recommended)  
 Through hole 1.2.3.5.6.7: Ø0.05 [1.30]  
 Through hole 4.8: Ø0.075 [1.90]  
 Through hole of mounting: Ø0.126 [3.20]  
 Top view pad 1.2.3.5.6.7: Ø0.064 [1.63]  
 Top view pad 4.8: Ø0.094 [2.38]  
 Top view pad of mounting: Groove R0.065 [1.65] L0.157 [4.00]  
 Bottom view pad 1.2.3.5.6.7: Ø0.102 [2.60]  
 Bottom view pad 8: Ø0.150 [3.80]  
 Bottom view pad 4: Ø0.130 [3.30]  
 Bottom view pad of mounting: Groove R0.065 [1.65] L0.252 [6.40]

**HEATSINK OPTIONS**

<p><b>Horizontal Fin Orientation (Suffix Option: H) 7G-0029B-F</b></p>	<p><b>Horizontal Fin Orientation (Suffix Option: H1) 7G-0030B-F</b></p>
<p><b>Vertical Fin Orientation (Suffix Option: H2) 7G-0031B-F</b></p>	<p><b>Vertical Fin Orientation (Suffix Option: H3) 7G-0032B-F</b></p>

Note: Models with thru-hole inserts cannot be equipped with a heatsink  
All dimensions in inch [mm]  
Tolerance: x.xx±0.02 [x.x±0.5]

**THERMAL CONSIDERATIONS**

This power module operates in a variety of thermal environments. Sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point in the figure below. The temperature at this location should not exceed 105°C. When operating, adequate cooling must be provided to maintain the test point temperature at or below 105°C. Although the maximum point temperature of the power modules is 105°C, you can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM)
- The iron base-plate dimension is 19" x 3.5" x 0.063" (the height is EIA standard 2U)
- The heat-sink is optional and P/N: 7G-0029B-F, 7G-0030B-F, 7G-031B-F, 7G-0032B-F

BASE PLATE

**FUSE CONSIDERATION**

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

Suggested input line fuses are below:

Model	Fuse Rating	Fuse Type
12VDC nominal input models	25A	Fast-Acting
24VDC nominal input models	12A	Fast-Acting
48VDC nominal input models	8A	Fast-Acting

**THERMAL CONSIDERATIONS**

This power module operates in a variety of thermal environments. Sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding environment.


Proper cooling can be verified by measuring the point in the figure below.

The temperature at this location should not exceed 105°C.

When operating, adequate cooling must be provided to maintain the test point temperature at or below 105°C.

Although the maximum point temperature of the power modules is 105°C, you can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM)
- The iron base-plate dimension is 19" x 3.5" x 0.063" (the height is EIA standard 2U)
- The heat-sink is optional and P/N: 7G-0029B-F, 7G-0030B-F, 7G-031B-F, 7G-0032B-F

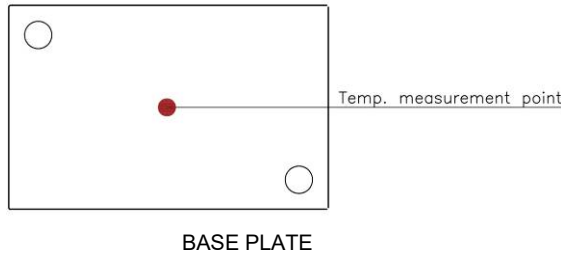

**MODEL NUMBER SETUP**

DCQA	150	-	48	S	05	R	H <sup>(1)</sup>
Series Name	Output Power		Input Voltage	Output Quantity	Output Voltage	Remote ON/OFF	Hole Thread & Heatsink Options
	<b>150:</b> 150 Watts		<b>12:</b> 8.5~22 VDC <b>24:</b> 16.5~36 VDC <b>48:</b> 33~75 VDC	<b>S:</b> Single Output	<b>33:</b> 3.3 VDC <b>05:</b> 5 VDC <b>12:</b> 12 VDC <b>15:</b> 15 VDC <b>24:</b> 24 VDC <b>30:</b> 30 VDC <b>48:</b> 48 VDC	<b>None:</b> Positive Logic <b>R:</b> Negative Logic	<b>None:</b> M3x0.5 Threaded-thru Inserts <b>TH:</b> Ø.126 Thru-hole Inserts <sup>(1)</sup> <b>H:</b> 0.24" Horizontal Heatsink <b>H1:</b> 0.5" Horizontal Heatsink <b>H2:</b> 0.24" Vertical Heatsink <b>H3:</b> 0.5" Vertical Heatsink

(1) Models with thru-hole inserts cannot be equipped with a heatsink.

---

## COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300  
Toll Free: ☎(888)597-9255  
Fax: ☎(603)778-9797  
E-mail: [sales@wallindustries.com](mailto:sales@wallindustries.com)  
Web: [www.wallindustries.com](http://www.wallindustries.com)  
Address: 37 Industrial Drive  
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.