

FEATURES

- High Efficiency up to 83%
- Fixed Switching Frequency
- Six-Sided Continuous Shield
- Standard 2 x 1 x 0.4 inch Package
- 2:1 and 4:1 Wide Input Voltage Range
- ISO9001 Certified Manufacturing Facilities
- Compliant to RoHS EU Directive 2002/95/EC
- Options: Positive Logic and Negative Logic Remote ON/OFF, Industrial Temperature

APPLICATIONS

- Measurement
- Wireless Network
- Telecom/Datacom
- Industry Control System
- Semiconductor Equipment



SPECIFICATIONS: KR/KRW Series

All specifications apply @ 25°C ambient unless otherwise noted

INPUT SPECIFICATIONS

Input Voltage Range	
KR	12V nominal input 9-18VDC 24V nominal input 18-36VDC 48V nominal input 36-75VDC
KRW	24V nominal input 9-36VDC 48V nominal input 18-75VDC
Input Filter	Pi Type
Input Surge Voltage (100ms max)	12V input 36 VDC 24V input 50 VDC 48V input 100 VDC
Input Reflected Ripple Current (nom. Vin and FL)	20mA _{p-p}
Start Up Time (nom. Vin and constant resistive load)	450ms max.
Remote ON/OFF (Option) (See Note 6)	
(Positive Logic)	DC-DC ON Open or 3.5V < Vr < 12V DC-DC OFF Short or 0V < Vr < 1.2V
(Negative Logic)	DC-DC ON Short or 0V < Vr < 1.2V DC-DC OFF Open or 3.5V < Vr < 12V
Input Current of Remote Control Pin (nominal Vin)	-0.5mA ~ +1mA
Remote Off State Input Current (nominal Vin)	2.5mA

OUTPUT SPECIFICATIONS

Output Voltage	see table
Voltage Accuracy (nominal Vin and full load)	±1%
Output Current	see table
Output Power	6 Watts max.
Line Regulation (LL to HL at FL)	±0.2%
Load Regulation (no load to full load)	Single Output ±0.2% Dual Output ±1%
Cross Regulation (Dual) (Asymmetrical load 25% / 100% FL)	±5%
Minimum Load	0%
Ripple/Noise (20 MHz BW)	50mV _{p-p}
Temperature Coefficient	±0.02% / °C max.
Transient Response Recovery Time	
25% load step change	(Single) 200us
FL to HL ±1% error band	(Dual) 200us

PROTECTION SPECIFICATIONS

Over Load Protection (% of full load at nom. input)	170% typ.
Short Circuit Protection.	Continuous, automatic recovery

GENERAL SPECIFICATIONS

Efficiency	see table
Switching Frequency	
KR	300KHz typ.
KRW	200KHz typ.
Isolation Voltage (Input to Output)	1600VDC min.
Isolation Resistance	10 ⁹ ohms min.
Isolation Capacitance	300pF max.

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	
Standard	-25°C ~ +85°C (with derating)
"1" suffix (See Note 7)	-40°C ~ +85°C (non-derating)
"1" suffix (KRW series)	-40°C ~ +85°C (with derating)
Storage Temperature	-55°C ~ +105°C
Maximum Case Temperature	100°C
Relative Humidity	5% to 95% RH
Thermal Impedance (See Note 8)	
Natural Convection	12°C / Watt
Natural Convection with Heat-Sink	10°C / Watt
Thermal Shock	MIL-STD-810F
Vibration	10~55Hz, 10G, 30 minutes along X, Y, and Z
MTBF (See Note 1)	3.145 x 10 ⁶ hours

PHYSICAL SPECIFICATIONS

Weight	27g (0.95oz)
Dimensions	2.0 x 1.0 x 0.40 inches (50.8 x 25.4 x 10.2 mm)
Case Material	Nickel-coated copper
Base Material	Non-conductive black plastic
Potting material	Epoxy (UL94-V0)
Shielding	six-sided

SAFETY & EMC

Approvals and Standards	IEC60950-1, UL60950-1 ⁽¹⁰⁾ , EN60950-1
EMI	EN55022 Class A
ESD	EN61000-4-2 Air ± 8KV Contact ± 6KV Perf. Criteria B
Radiated Immunity	EN61000-4-3 10V/m Perf. Criteria A
Fast Transient	EN61000-4-4 ±2KV Perf. Criteria B
Surge (See Note 9)	EN61000-4-5 ±1KV Perf. Criteria B
Conducted Immunity	EN61000-4-6 10 Vrms Perf. Criteria A

Due to advances in technology, specifications subject to change without notice





MODEL SELECTION GUIDE

Model Number	Input Range	Output Voltage	Output Current		Output (4) Ripple & Noise	Input Current		Efficiency (4)	Capacitor(5) Load max
			Min. load	Full load		No load (3)	Full load (2)		
KR12S33-1000	12 VDC (9 – 18 VDC)	3.3 VDC	0mA	1000mA	50mVp-p	10mA	382mA	76	3700µF
KR12S5-1000		5 VDC	0mA	1000mA	50mVp-p	10mA	556mA	79	1700µF
KR12S12-470		12 VDC	0mA	470mA	50mVp-p	10mA	610mA	81	290µF
KR12S15-400		15 VDC	0mA	400mA	50mVp-p	15mA	658mA	80	188µF
KR12D5-500		±5 VDC	0mA	±500mA	50mVp-p	20mA	556mA	79	±850µF
KR12D12-230		±12 VDC	0mA	±230mA	50mVp-p	15mA	597mA	81	±140µF
KR12D15-190		±15 VDC	0mA	±190mA	50mVp-p	20mA	609mA	82	±47µF
KR24S33-1000	24 VDC (18 – 36 VDC)	3.3 VDC	0mA	1000mA	50mVp-p	15mA	199mA	73	3700µF
KR24S5-1000		5 VDC	0mA	1000mA	50mVp-p	15mA	282mA	78	1700µF
KR24S12-470		12 VDC	0mA	470mA	50mVp-p	10mA	305mA	81	290µF
KR24S15-400		15 VDC	0mA	400mA	50mVp-p	20mA	325mA	81	188µF
KR24D5-500		±5 VDC	0mA	±500mA	50mVp-p	15mA	278mA	79	±850µF
KR24D12-230		±12 VDC	0mA	±230mA	50mVp-p	20mA	295mA	82	±140µF
KR24D15-190		±15 VDC	0mA	±190mA	50mVp-p	20mA	308mA	91	±47µF
KR48S33-1000	48 VDC (36 – 75 VDC)	3.3 VDC	0mA	1000mA	50mVp-p	5mA	100mA	73	3700µF
KR48S5-1000		5 VDC	0mA	1000mA	50mVp-p	10mA	145mA	76	1700µF
KR48S12-470		12 VDC	0mA	470mA	50mVp-p	10mA	151mA	82	290µF
KR48S15-400		15 VDC	0mA	400mA	50mVp-p	10mA	160mA	82	188µF
KR48D5-500		±5 VDC	0mA	±500mA	50mVp-p	10mA	141mA	78	±850µF
KR48D12-230		±12 VDC	0mA	±230mA	50mVp-p	10mA	149mA	81	±140µF
KR48D15-190		±15 VDC	0mA	±190mA	50mVp-p	10mA	154mA	81	±47µF
KRW24S33-1000	24 VDC (9 – 36 VDC)	3.3 VDC	0mA	1000mA	50mVp-p	5mA	188mA	77	3700µF
KRW24S5-1000		5 VDC	0mA	1000mA	50mVp-p	5mA	274mA	80	1700µF
KRW24S12-470		12 VDC	0mA	470mA	50mVp-p	5mA	301mA	82	290µF
KRW24S15-400		15 VDC	0mA	400mA	50mVp-p	5mA	325mA	81	188µF
KRW24D5-500		±5 VDC	0mA	±500mA	50mVp-p	5mA	274mA	80	±850µF
KRW24D12-230		±12 VDC	0mA	±230mA	50mVp-p	5mA	295mA	82	±140µF
KRW24D15-190		±15 VDC	0mA	±190mA	50mVp-p	10mA	301mA	83	±47µF
KRW48S33-1000	48 VDC (18 – 75 VDC)	3.3 VDC	0mA	1000mA	50mVp-p	5mA	100mA	73	3700µF
KRW48S5-1000		5 VDC	0mA	1000mA	50mVp-p	10mA	145mA	76	1700µF
KRW48S12-470		12 VDC	0mA	470mA	50mVp-p	10mA	151mA	82	290µF
KRW48S15-400		15 VDC	0mA	400mA	50mVp-p	10mA	163mA	81	188µF
KRW48D5-500		±5 VDC	0mA	±500mA	50mVp-p	5mA	141mA	78	±850µF
KRW48D12-230		±12 VDC	0mA	±230mA	50mVp-p	10mA	149mA	81	±140µF
KRW48D15-190		±15 VDC	0mA	±190mA	50mVp-p	10mA	154mA	81	±47µF

NOTES


1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C. (Ground fixed and controlled environment)
 2. Maximum value at nominal input voltage and full load of standard type.
 3. Typical value at nominal input voltage and no load.
 4. Typical value at nominal input voltage and full load.
 5. Test by minimum Vin and constant resistive load.
 6. The ON/OFF control pin voltage is referenced to -Vin.
 To order positive logic ON-OFF control add the suffix "P" (Ex: KR48S5-1000P)
 To order negative logic ON-OFF control add the suffix "R" (Ex: KR48S5-1000R)
 7. The industrial "I" suffix for the 2:1 input version is more efficient; therefore, it can be operated in a more extensive temperature range than "standard" and "I" suffix 4:1 input versions.
 To order industrial temperature range (-40°C ~ +85°C) add the suffix "I" to the part number (Ex: KR48S5-1000I)
 8. Heat sink is optional, consult factory.
 9. An external filter capacitor is required if the module has to meet EN61000-4-5. The filter capacitor Wall Industries suggests:
 Nippon chemi-con KY Series 220µF/100V ESR 48mΩ.
 10. This product is Listed to applicable standards and requirements by UL.
- *Due to advances in technology, specifications subject to change without notice.*

DERATING CURVE & EFFICIENCY GRAPHS

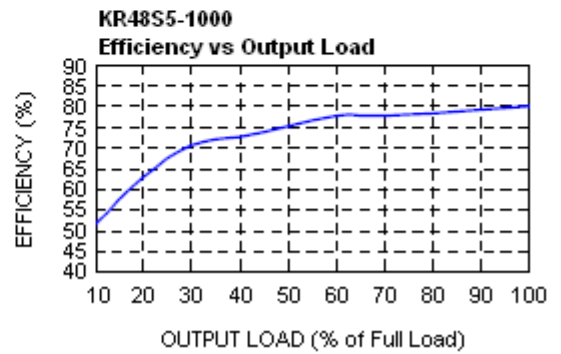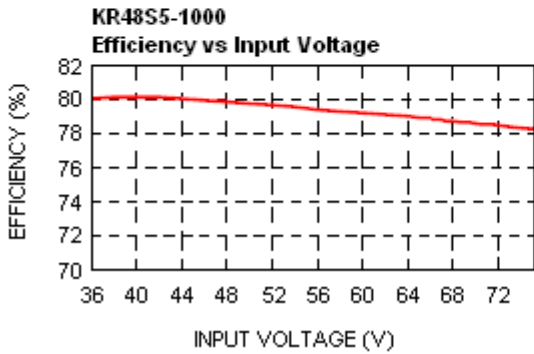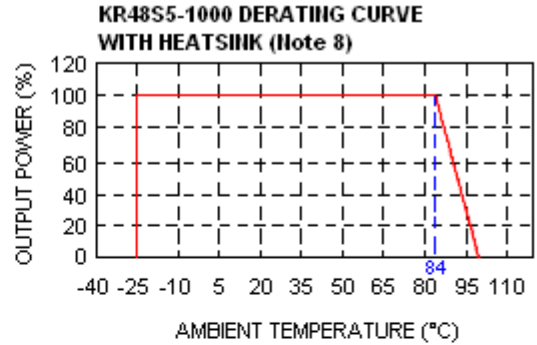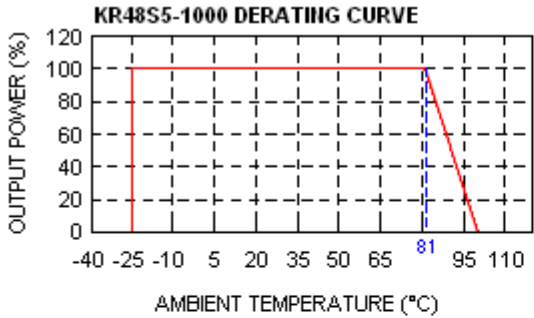

MECHANICAL DRAWING

Unit: inches (mm)

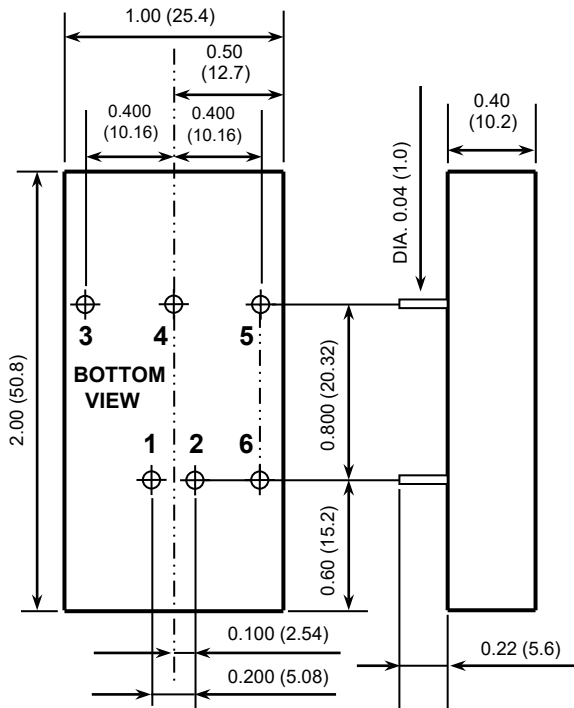

PIN CONNECTION		
PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Common
5	-Vout	-Vout
6	Control (option)	Control (option)

1. Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01 (0.25)
3. Pin dimension tolerance ±0.004 (0.1)



Wall Industries, Inc.

Rev D

KR/KRW Series
Single and Dual Outputs
6 Watt DC/DC Converters
2:1 and 4:1 Wide Input Voltage Range

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.