

Type O: Open Type



Size: 3" x 2" x 0.94"

Type U: U Chassis Type



Size: 3.53" x 2.38" x 1.31"

Type C: Enclosed Type



Size: 3.53" x 2.38" x 1.31"

Type D: Din Rail Type



Size: 3.67" x 2.37" x 1.31"

OPTIONS

- Package Type
 - Open Type
 - U Chassis Type
 - Enclosed Type
 - Din Rail Type
- Output Voltage
- Protection Class
- Connector

APPLICATIONS

- Medical Equipment
- Wireless Network
- Telecom/Datacom
- Industry Control System
- Measurement Equipment
- Semiconductor Equipment

FEATURES

- Universal Input Voltage Range of 85~264VAC
- Compact ~3 x ~2 Inch Frame
- Low Standby Power Consumption
- Built-In Class B EMI Filter
- Output Voltages Ranging from 5VDC to 53VDC
- 4000VAC Input to Output 2MOPP Insulation
- Adjustable Output Range
- Low Leakage Current
- Protection Type Class I and Class II
- RoHS & REACH Compliant
- Level VI Compliant
- High Operating Altitude of 5000M
- IEC/EN/ANSI/AAMI/ES 60601-1 & IEC/EN/UL 60950-1 Edition Safety Approvals
- Over Voltage, Over Load, and Short Circuit Protection

DESCRIPTION

The PSMAD65 series of AC DC power supplies offers up to 65 watts of continuous output power in a compact package. Single output models are available with an input voltage range of 85~264VAC and output voltages ranging from 5VDC to 53VDC. Each model has a built in Class B EMI Filter, low leakage current, and high operating altitude. Models of this series are protected against over voltage, over load, and short circuit conditions, have 4000VAC input to output 2MOPP insulation, and have IEC/EN/ANSI/AAMI/ES 60601-1 and IEC/EN/UL 60950-1 safety approvals. Four package types are available for this series: open, u-chassis, enclosed, and din rail. Please call factory for ordering details.

MODEL SELECTION TABLE

Model Number ⁽¹⁾	Input Voltage Range	Output Voltage	Output Current ⁽²⁾	Ripple & Noise	No Load Input Power	Output Power	Efficiency
PSMAD65-05S-X	85~264 (120~370VDC)	5VDC	10A	75mVp-p	0.11W	50W	90%
PSMAD65-7.5S-X		7.5VDC	8.67A	75mVp-p	0.11W	65W	90%
PSMAD65-09S-X		9VDC	7.23A	75mVp-p	0.11W	65W	91%
PSMAD65-12S-X		12VDC	5.42A	75mVp-p	0.11W	65W	92.5%
PSMAD65-15S-X		15VDC	4.34A	75mVp-p	0.11W	65W	93.5%
PSMAD65-18S-X		18VDC	3.62A	75mVp-p	0.11W	65W	93%
PSMAD65-24S-X		24VDC	2.71A	75mVp-p	0.11W	65W	93.5%
PSMAD65-241S-X		24VDC	2.71A	75mVp-p	0.11W	65W	92%
PSMAD65-28S-X		28VDC	2.33A	75mVp-p	0.11W	65W	93.5%
PSMAD65-281S-X		28VDC	2.33A	75mVp-p	0.11W	65W	91.5%
PSMAD65-36S-X		36VDC	1.81A	75mVp-p	0.11W	65W	92.5%
PSMAD65-48S-X		48VDC	1.36A	150mVp-p	0.11W	65W	93%
PSMAD65-53S-X		53VDC	1.24A	150mVp-p	0.11W	65W	92.5%

SPECIFICATIONS

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
 We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit
INPUT SPECIFICATIONS						
Operating Input Voltage Range	AC Input		85		264	VAC
	DC Input		120		370	VDC
Input Frequency	AC Input		47		63	Hz
Input Current	100VAC and Full Load				1.6	A
	240VAC and Full Load				0.9	
No Load Input Power	230VAC			0.11		W
Leakage Current	264VAC				75	µA
Input Inrush Current	230VAC				60	A
Input Protection	Internal Fuse in Line and Neutral		T3.15A/250VAC			
OUTPUT SPECIFICATIONS						
Output Voltage			See Table			
Initial Set Voltage Accuracy	230VAC and Full Load		-1.0		+1.0	%
Line Regulation	Low Line to High Line		-0.2		+0.2	%
Load Regulation	No Load to Full Load	5Vout	-0.7		+0.7	%
		All others	-0.5		+0.5	
	10% Load to 90% Load	5Vout	-0.6		+0.6	
		All Others	-0.4		+0.4	
		53Vout	-20		+10	
Voltage Adjustability	Single Output	All Others	-10		+10	%
Output Power			See Table			
Output Current			See Table			
Minimum Load			0			%
Ripple & Noise (20MHz BW)	With a 10µF/25V 1206 X7R MLCC	5Vout, 7.5Vout, 9Vout, 12Vout, 15Vout, 18Vout		75		mVp-p
	With a 1µF/50V 1206 X7R MLCC	24Vout, 28Vout, 36Vout		75		
	With a 0.1µF/100V 1206 X7R MLCC	48Vout, 53Vout		150		
Transient Response	Load step from 50~75% change at 2.5A/µs	Peak Deviation			3	% Vout
		Recovery Time		600		µs
Start-Up Time					1000	ms
Rise Time				20		ms
Hold-Up Time	115VAC and Full Load			16		ms
Temperature Coefficient			-0.02		+0.02	%/°C
PROTECTION						
Short Circuit Protection			Continuous, Automatic Recovery			
Over Load Protection	% of Iout rated; Hiccup mode			145		%
Over Voltage Protection	% of Vout(nom); Latch mode		125		140	%
ENVIRONMENTAL SPECIFICATIONS						
Operating Ambient Temperature	Natural convention with derating		-40		+85	°C
Storage Temperature Range			-40		+85	°C
Relative Humidity	Non-Condensing		5		95	%RH
Operating Altitude					5000	M
Shock			IEC60068-2-27			
Vibration			IEC60068-2-6			
MTBF	MIL-HDBK-217F, Full Load			1,494,000		hours
GENERAL SPECIFICATIONS						
Efficiency			See Table			
Switching Frequency	230VAC	5Vout		60		kHz
		7.5Vout		80		
		9Vout		70		
		All Others		120		
Isolation Voltage	1 minute (2MOPP insulation)	Input to Output	4000			VAC
		Input (Output) to F.G.	2500			
Isolation Resistance	500VDC		0.1			GΩ

SPECIFICATIONS

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit
PHYSICAL SPECIFICATIONS						
Weight			O Type	4.13oz (117g)		
			U Type	5.54oz (157g)		
			C Type	6.07oz (172g)		
			D Type	6.81oz (193g)		
Dimensions (L x W x H)			O Type	3in x 2in x 0.94in (76.2mm x 50.8mm x 24mm)		
			U Type	3.53in x 2.38in x 1.31in (89.7mm x 60.5mm x 33.3mm)		
			C Type	3.53in x 2.38in x 1.31in (89.7mm x 60.5mm x 33.3mm)		
			D Type	3.67in x 2.37in x 1.31in (93mm x 60.4mm x 33.3mm)		
SAFETY & EMC CHARACTERISTICS						
Safety Approvals ⁽⁴⁾	IEC/EN/ANSI/AAMI ES 60601-1 IEC/EN/UL 60950-1		CB: UL(Demko)			
EMI ⁽³⁾	EN55011, EN55032,and EN60601-1-2 & FCC Part 18		Conducted		Class B	
			Radiated		Class B	
Harmonic Currents	EN61000-3-2	Full Load	Class A			
Voltage Flicker	EN61000-3-3					
EMS	EN55024, EN60601-1-2, complies with EN 61850-3					
ESD	EN61000-4-2	Air ±15kV and Contact ±8kV	Perf. Criteria A			
Radiated Immunity	EN61000-4-3	20 V/m	Perf. Criteria A			
Fast Transient	EN61000-4-4	±2kV	Perf. Criteria A			
Surge	EN61000-4-5	DM ±1kV	Perf. Criteria A			
Conducted Immunity	EN61000-4-6	20 Vr.m.s	Perf. Criteria A			
Power Frequency Magnetic Field	EN61000-4-8	30 A/m	Perf. Criteria A			
Dip and Interruptions	EN61000-4-11					


NOTES

- (1) The last letter in model name indicates package type: "O"= Open Type, "U"= U Chassis Type, "C"= Enclosed Type, or "D"= Din Rail Type.
Add "1" after "S" to indicate Protection Type Class II. Ex: PSMAD65-24S1-X
- (2) Output Current @Convention cooled 60°C Ta
- (3) External components may be required for class I application.
- (4) This product is Listed to applicable standards and requirements by UL.

**Due to advances in technology, specifications are subject to change without notice.*


DERATING CURVES

Derating vs. Ambient Temperature
PSMAD65-xxS-X xx=7.5, 9, 281

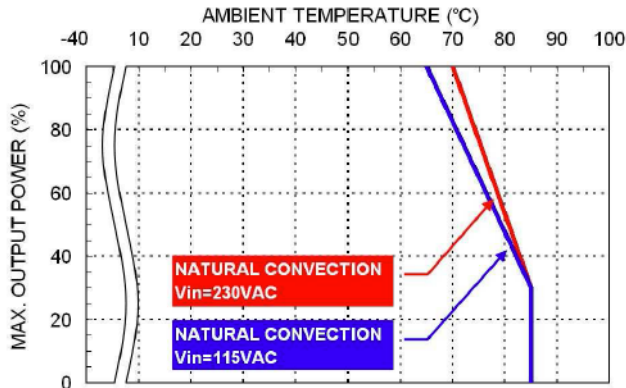


Derating Curve vs. Ambient Temperature

Derating vs. Ambient Temperature
PSMAD65-xxS-X xx=5, 12, 241, 36, 48, 53

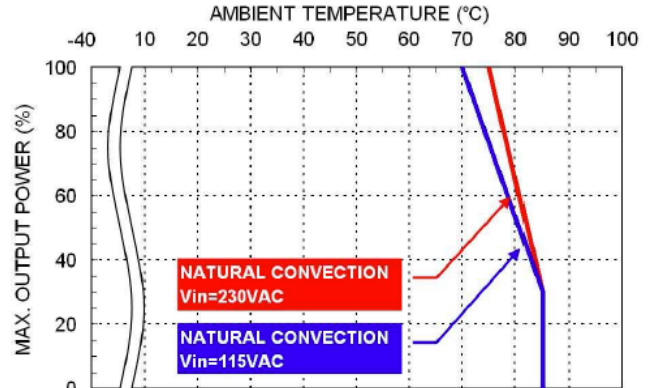


Derating Curve vs. Ambient Temperature

Derating vs. Ambient Temperature
PSMAD65-xxS-X xx=15, 24, 28

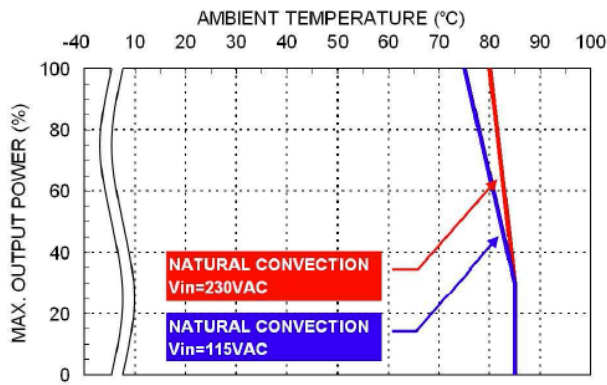


Derating Curve vs. Ambient Temperature

Derating vs. Input Voltage

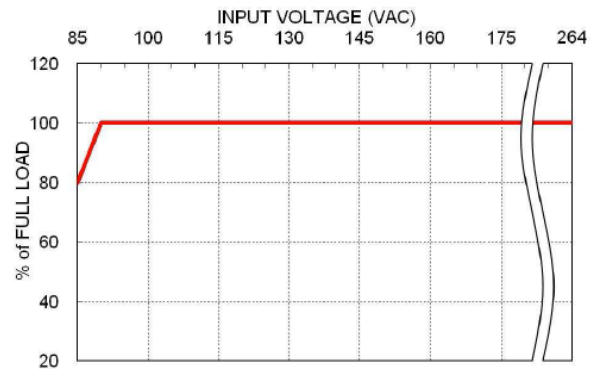


Derating Curve vs. Input Voltage

Efficiency vs. Output Load
PSMAD65-24S-X

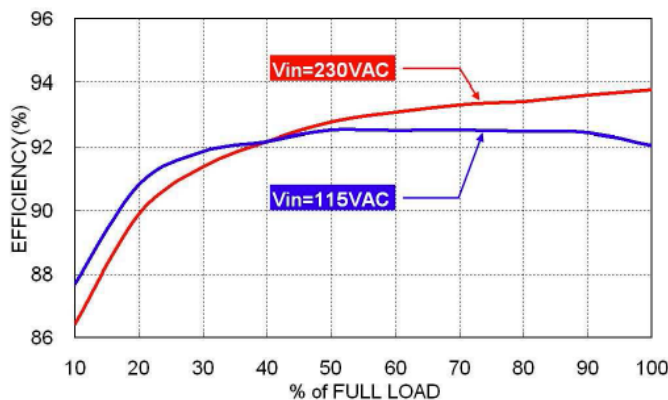


Efficiency vs. Input Voltage
PSMAD65-24S-X

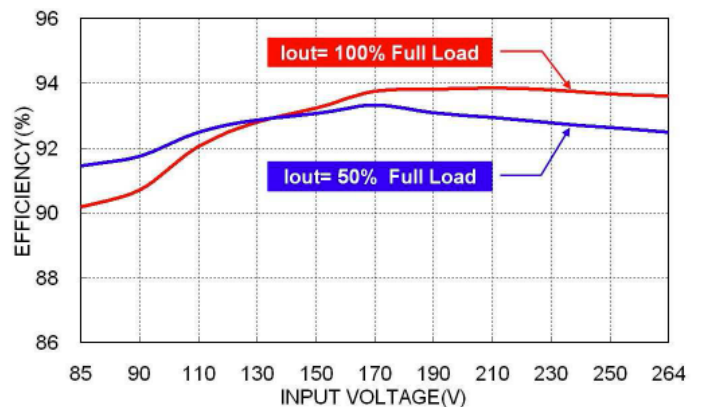


MECHANICAL DRAWINGS


Type O- Open Type

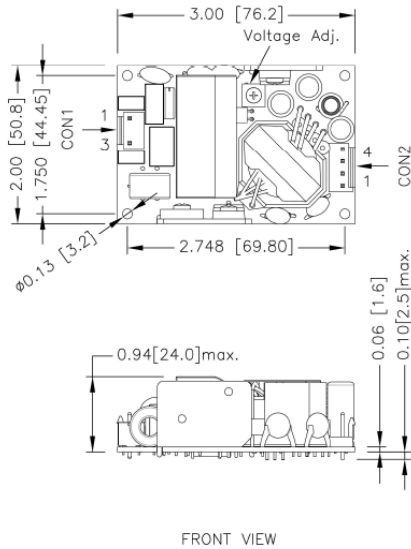


Type D- Din Rail Type

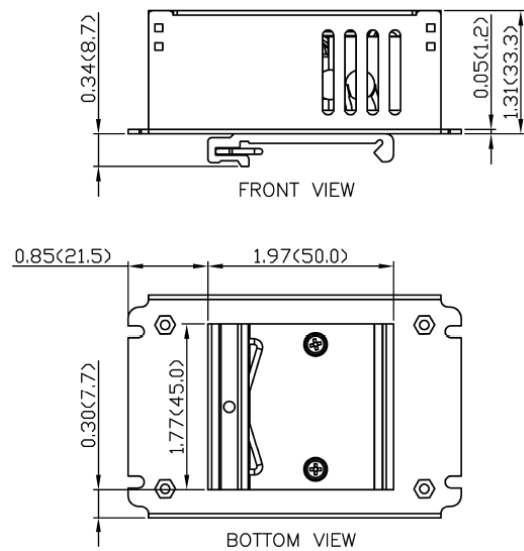

C Type- Enclosed Type

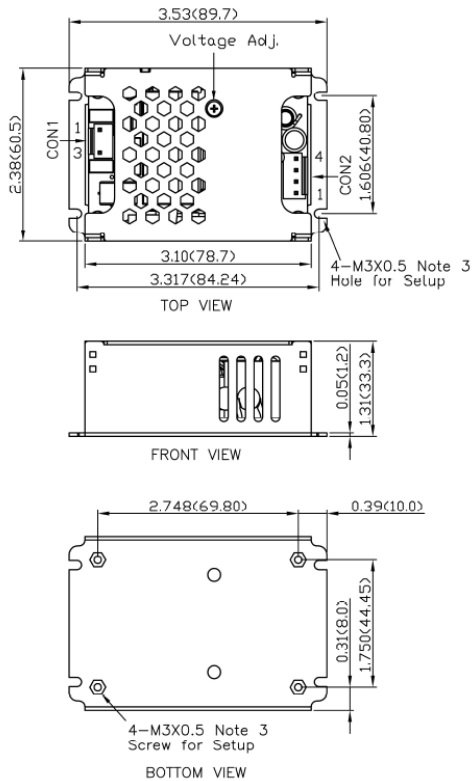

U Type- U Chassis Type

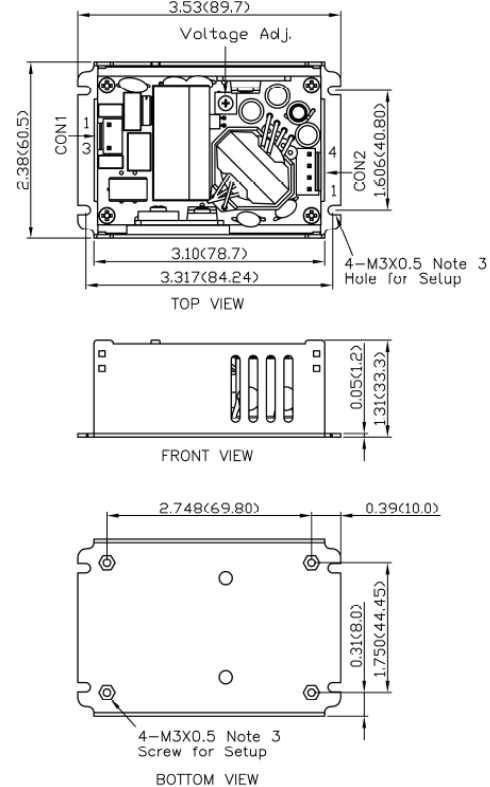




Note:

1. All dimensions in inch [mm]
2. Tolerance: $x.xx \pm 0.02$ [$x.x \pm 0.5$] $x.xxx \pm 0.01$ [$x.xx \pm 0.25$]
3. M3x0.5 screw locked torque MAX 5Kgf.cm/0.49N.m

Either one of four screw holes of Open/Chassis type can be considered as PE connection for CLASS I application.

CONNECTORS

CON1-Input Connector		CON2-Output Connector	
Pin 1	Line	Pin 1,2	-Vout
Pin 3	Neutral	Pin 3,4	+Vout

Blank: JST type		M Suffix: Molex Type		T Suffix: Terminal Block	
					
Mates with Housing: CON1: VHR-3N CON2: VHR-4N		Mates with Housing: CON1: 09-50-8031 CON2: 09-50-8041		Mates with: Screw locked torque MAX 2Kgf.cm/0.2N.m	
Crimp Terminals CON1: SVH-21T-P1.1 CON2: SVH-21T-P1.1		Crimp Terminals CON1: SD-2478 CON2: SD-2478		Wire dimension range 26~16AWG	

MODEL NUMBER SETUP

PS	MAD	65	-	24	S	1	-	O	M
Supply Type	Application	Output Power		Output Voltage	Output Quantity	Protection Type		Package Type	Connector
Open Frame	Medical Application	65W		05: 5 VDC 7.5: 7.5 VDC 09: 9 VDC 12: 12 VDC 15: 15 VDC 18: 18 VDC 24/241: 24 VDC 28/281: 28 VDC 36: 36 VDC 48: 48 VDC 53: 53 VDC	S: Single	No Suffix: CLASS I 1: CLASS II		O: Open Frame U: U-Chassis C: Enclosed D: Din Rail	Blank: JST M: Molex T: Terminal Block

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
 Toll Free: ☎(888)597-9255
 Fax: ☎(603)778-9797
 E-mail: sales@wallindustries.com
 Web: www.wallindustries.com
 Address: 37 Industrial Drive
 Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.