

## Wall Industries, Inc.

---

# DCQEB125 SERIES

---

**2:1 Input Voltage Ranges**  
**Industry Standard Quarter-Brick Package**  
**Up to 100 Watts, Single Outputs**  
**DC/DC Power Converters**

---



### APPLICATIONS

- Telecom/Datacom
- Wireless Networks
- Industry Control Systems
- Semiconductor Equipment
- Distributed Power Architectures

### OPTIONS

- Heatsinks
- Pin Lengths
- Thru-Hole Inserts
- Negative Logic Remote ON/OFF

### FEATURES

- Up to 125 Watts Output Power
- Single Outputs
- Output Current up to 35A
- Industry Standard Quarter-Brick Package: 2.28" x 1.45" x 0.50"
- Under Voltage Lockout
- Fixed Switching Frequency
- Input to Output Isolation: 1600VDC
- 2:1 Wide Input Voltage Range
- High Efficiency up to 90%
- No Minimum Load Required
- Adjustable Output Voltage
- Threaded Inserts and Thru-Hole Inserts Available
- Short Circuit, Over Voltage, Over Current, and Over Temp. Protection
- Compliant to RoHS EU Directive 2002/95/EC
- CE Mark Meets 2006/95/CE, 93/68/EEC, and 2004/108/EC
- UL60950-1, EN60950-1, and IEC60950-1 Safety Approvals (See Note 12)

### DESCRIPTION

The DCQEB125 series of DC/DC power converters provides up to 125 Watts of output power in an industry standard 2.28" x 1.45" x 0.50" quarter-brick package and footprint. This series consists of single output models with 2:1 input voltage ranges of 18-36VDC or 36-75VDC. Some features include high efficiency up to 90%, adjustable output voltage, remote sense, and positive or negative remote ON/OFF control. This series is RoHS compliant and has UL60950-1, EN60950-1, and IEC60950-1 safety approvals (see note 12). Several different options are available for this series including negative remote ON/OFF control, heatsinks, pin lengths, and thru-hole inserts. Please call factory for more details.

SPECIFICATIONS: DCQE125 SERIES						
All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances.						
SPECIFICATION	TEST CONDITIONS		Min	Nom	Max	Unit
<b>INPUT SPECIFICATIONS</b>						
Input Voltage Range	24VDC nominal input models		18	24	36	VDC
	48VDC nominal input models		36	48	75	
Start-up Voltage	24VDC nominal input models				18	VDC
	48VDC nominal input models				36	
Shutdown Voltage	24VDC nominal input models		15			VDC
	48VDC nominal input models		32			
Input Surge Voltage	24VDC nominal input models		100ms		50	VDC
	48VDC nominal input models				100	
Input Current			See Table			
Input Filter			L-C Type			
<b>OUTPUT SPECIFICATIONS</b>						
Output Voltage			See Table			
Line Regulation	Low line to high line at full load		-0.2		+0.2	%
Load Regulation	No load to full load		-0.3		+0.3	%
Voltage Accuracy			-1.5		+1.5	%
Voltage Adjustability (See Note 5)			-20		+10	%
Output Power			See Table			
Output Current			See Table			
Minimum Load			0			%
Ripple & Noise	Measured at nominal input and full load with 20MHz BW and 1µF M/C and 10µF T/C capacitors in parallel.			100		mVp-p
Transient Response Recovery Time	25% load step change			200		µs
Start-Up Time	Power Up	Nominal input and constant resistive load			25	ms
	Remote ON/OFF				25	ms
Remote Sense (See Note 5)				10		% Vo
Temperature Coefficient			-0.02		+0.02	%/°C
<b>PROTECTION</b>						
Over Voltage Protection Threshold	Non-latching Hiccup				120	% Vo
Over Current Protection Threshold			110		140	% Io
Short Circuit Protection			Hiccup, automatic recovery			
Over Temperature Protection					+110	°C
<b>GENERAL SPECIFICATIONS</b>						
Efficiency	Nominal input and full load		See Table			
Switching Frequency			243	270	297	KHz
Isolation Voltage	Input to Output	For 1 minute	1600			VDC
	Input to Base-plate	For 1 minute	1000			VDC
	Output to Base-plate	For 1 minute	1000			VDC
Isolation Resistance			10			MΩ
Isolation Capacitance					2500	pF
<b>REMOTE ON/OFF (See Note 6)</b>						
Positive Logic (standard)	DC/DC ON		Open or 3V < Vr < 15V			
	DC/DC OFF		Short or 0V < Vr < 1.2V			
Negative Logic (optional)	DC/DC ON		Short or 0V < Vr < 1.2V			
	DC/DC OFF		Open or 3V < Vr < 15V			
Input Current of Remote Control Pin	Nominal input		-0.5		1	mA
Remote Off Input Current	Nominal input			2.5		mA
<b>ENVIRONMENTAL SPECIFICATIONS</b>						
Operating Base-Plate Temperature (See Note 7)			-40		+100	°C
Storage Temperature			-55		+125	°C
Relative Humidity	Non-condensing		5		95	% RH
Thermal Shock			MIL-STD-810F			
Vibration			10~55Hz, 2G, 30 minutes along X, Y, and Z			
MTBF (See Note 1)	BELLCORE TR-NWT-000332		2,500,000			Hours
	MIL-HDBK-217F		125,700			Hours
<b>PHYSICAL SPECIFICATIONS</b>						
Weight			1.46oz (42g)			
Dimensions (L x W x H)			2.28 x 1.45 x 0.50 inches (57.9 x 36.8 x 12.7 mm)			
Case Material			Aluminum base-plate			
<b>SAFETY &amp; EMC CHARACTERISTICS</b>						
Safety Approvals			UL60950-1 <sup>(14)</sup> , IEC60950-1, EN60950-1 (DCQE125-48S1.8, 48S2.5, 48S3.3, and 48S05 have approvals; approvals pending for all other models)			
EMI (See Note 8)	EN55022		Class A			
Radiated Immunity	EN61000-4-3		10 V/m			Perf. Criteria A
Fast Transient (See Note 9)	EN61000-4-4		±2KV			Perf. Criteria B
Surge (See Note 9)	EN61000-4-5		±1KV			Perf. Criteria B
Conducted Immunity	EN61000-4-6		10 Vrms			Perf. Criteria A

MODEL SELECTION TABLE									
Model Number <sup>(12)</sup>	Input Voltage Range	Output Voltage	Output Current		Ripple & Noise <sup>(4)</sup>	Input Current		Output Power	Efficiency <sup>(4)</sup>
			Min. load	Full load		No Load <sup>(3)</sup>	Full Load <sup>(2)</sup>		
DCQEB125-24S3.3	24VDC (18 - 36 VDC)	3.3 VDC	0mA	30A	100mVp-p	90mA	4970mA	99W	87%
DCQEB125-24S05		5 VDC	0mA	25A	100mVp-p	165mA	6127mA	125W	89%
DCQEB125-24S12		12 VDC	0mA	10.42A	100mVp-p	50mA	6129mA	125W	89%
DCQEB125-24S15		15 VDC	0mA	8.33A	100mVp-p	60mA	6125mA	125W	89%
DCQEB125-48S1.8	48 VDC (36 - 75 VDC)	1.8 VDC	0mA	35A	100mVp-p	65mA	1641mA	63W	84%
DCQEB125-48S2.5		2.5 VDC	0mA	35A	100mVp-p	50mA	2223mA	87.5W	86%
DCQEB125-48S3.3		3.3 VDC	0mA	30A	100mVp-p	75mA	2455mA	99W	88%
DCQEB125-48S05		5 VDC	0mA	25A	100mVp-p	110mA	3028mA	125W	90%
DCQEB125-48S12		12 VDC	0mA	10.42A	100mVp-p	40mA	3029mA	125W	90%
DCQEB125-48S15		15 VDC	0mA	8.33A	100mVp-p	40mA	3027mA	125W	90%



**NOTES**

- BELLCORE TR-NWT-000332. Case 1: 80% Stress, Temperature at 40°C. MIL-HDBK-217F Notice2 @Ta=25°C, Full load (Ground, Benign, controlled environment).
- Maximum value at nominal input voltage and full load.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Maximum output deviation is +10% inclusive of trim. If remote sense is not being used the +SENSE should be connected to its corresponding +OUTPUT and likewise the -SENSE should be connected to its corresponding -OUTPUT.
- The remote ON/OFF control pin voltage is referenced to -INPUT. To order negative logic Remote ON/OFF control add the suffix "R" to the model number (Ex: DCQEB125-48S05R).
- Heatsink is optional and P/N: 7G-0029A-F, 7G-0030A-F, 7G-0031A-F, and 7G-0032A-F.
- The DCQEB125 series meets EN55022 Class A and Class B only with external components added before the input pins to the converter.
- An external input filter capacitor is required if the module has to meet EN61000-4-4 and EN61000-4-5. We recommend Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ.
- BASE-PLATE GROUNDING: EMI can be reduced when you connect the four screw bolts to the shield plane.
- The converter is provided with basic insulation.
- Safety Approvals: DCQEB125-48S1.8, 48S2.5, 48S3.3, and 48S05 have safety approvals; approvals pending for all other models.
- This product is Listed to applicable standards and requirements by UL.

**CAUTION:** The power module is not internally fused. An input line fuse must always be used.


*Due to advances in technology, specifications subject to change without notice.*

**DERATING**

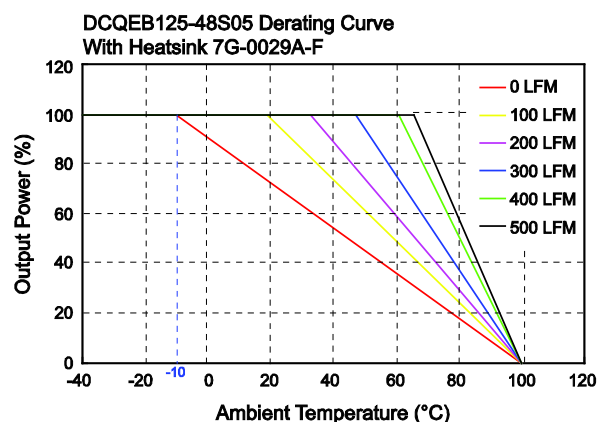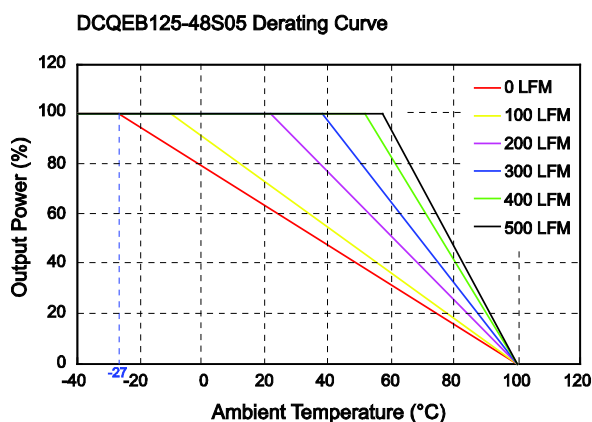


**CHARACTERISTICS**


DCQEB125-48S05 Efficiency vs Input Voltage

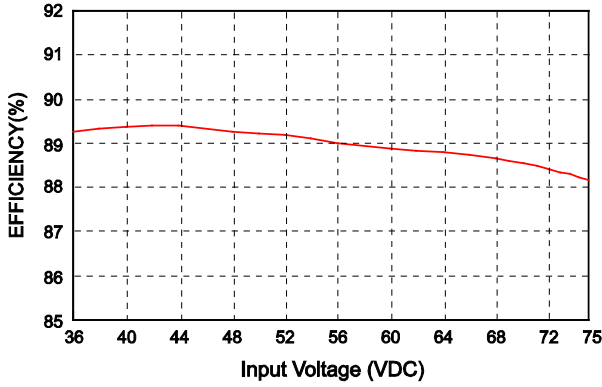

DCQEB125-48S05 Efficiency vs Output Load

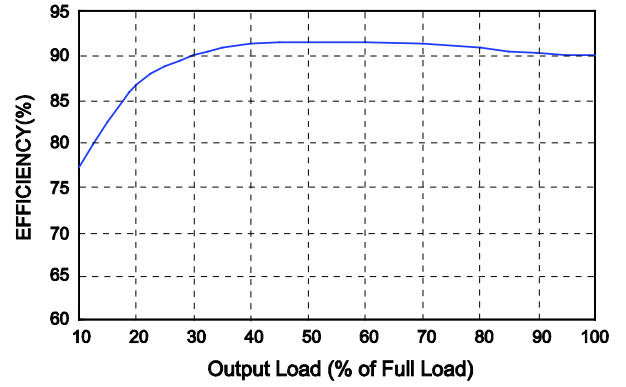


**Recommended Filter for EN55022 Class B Compliance**

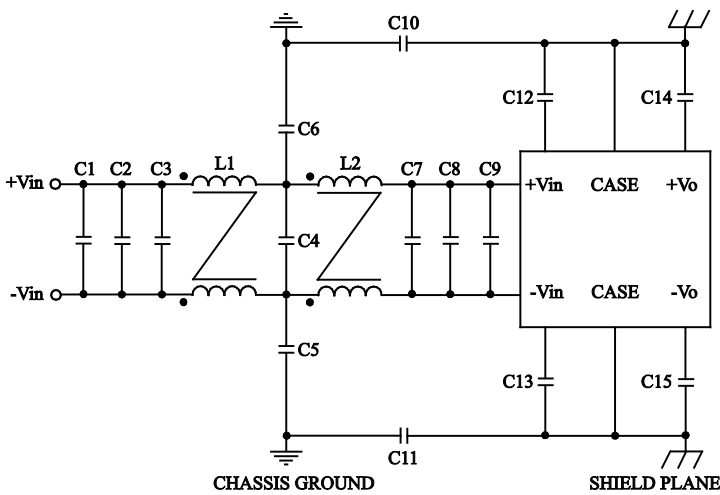


	C1	C2	C3	C4	C5
DCQEB125-24Sxx	6.8μF/50V	6.8μF/50V	6.8μF/50V	6.8μF/50V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	6.8μF/50V	6.8μF/50V	6.8μF/50V	0.1μF/50V
	C11	C12	C13	C14	C15
	0.1μF/50V	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV
	L1	L2			
	622μH	224μH			
DCQEB125-48Sxx	C1	C2	C3	C4	C5
	100μF/100V	1.5μF/100V	1.5μF/100V	1.5μF/100V	1.5nF/3KV
	C6	C7	C8	C9	C10
	1.5nF/3KV	47μF/100V	1.5μF/100V	1.5μF/100V	0.1μF/50V
	C11	C12	C13	C14	C15
	0.1μF/50V	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV	1.0nF/3KV
L1	L2				
	620μH	620μH			

**Recommended EN55022 Class B Filter Circuit Layout**

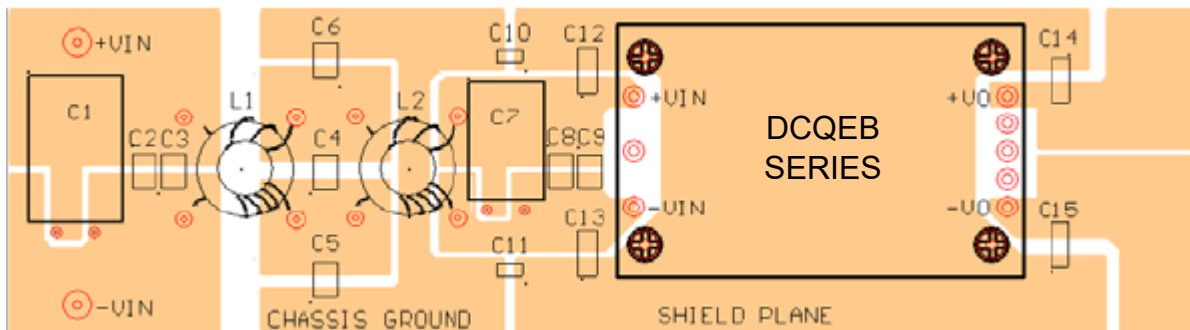

**MECHANICAL DRAWING**

Unit: inches (mm)

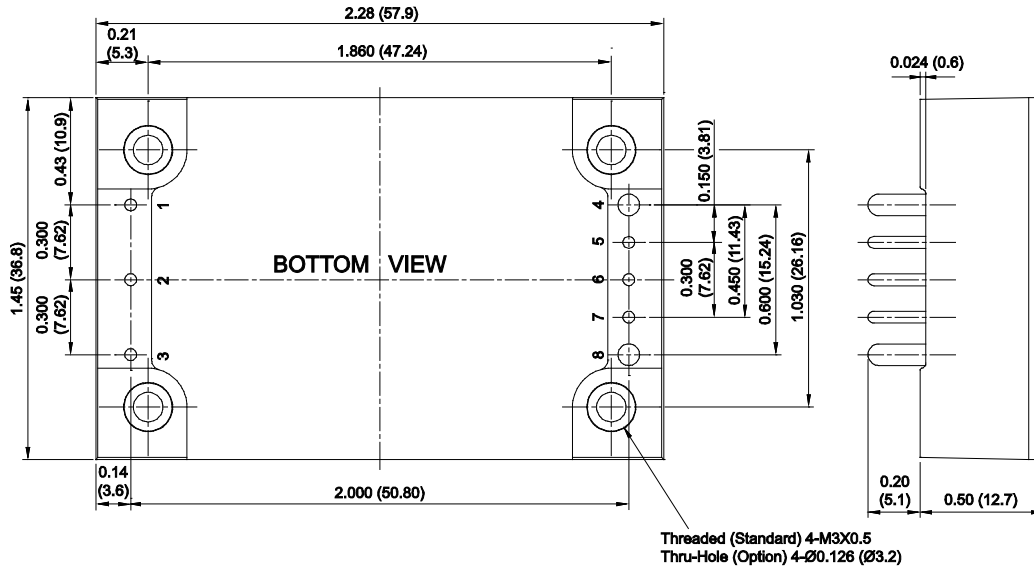

Threaded (Standard) 4-M3X0.5  
Thru-Hole (Option) 4-Ø0.126 (Ø3.2)


PIN CONNECTIONS		
PIN	FUNCTION	PIN Ø
1	-INPUT	Ø.040 (1.02)
2	CTRL	Ø.040 (1.02)
3	+INPUT	Ø.040 (1.02)
4	-OUTPUT	Ø.060 (1.52)
5	-SENSE	Ø.040 (1.02)
6	TRIM	Ø.060 (1.52)
7	+SENSE	Ø.040 (1.02)
8	+OUTPUT	Ø.060 (1.52)

1. Tolerance: X.XX±0.02 (X.X±0.5)  
X.XXX±0.01 (X.XX±0.25)
2. Pin Pitch Tolerance: ±0.01 (±0.25)
3. Pin Dimension Tolerance: ±0.004 (±0.1)

PRODUCT OPTIONS		SUFFIX	PRODUCT OPTIONS		SUFFIX
Positive remote ON/OFF logic	0.200" pin length	none	Heatsinks	7G-0029A-F	H
	0.145" pin length	S		7G-0030A-F	H1
Negative remote ON/OFF logic	0.200" pin length	R		7G-0031A-F	H2
	0.145" pin length	RL		7G-0032A-F	H3
Thru-Hole Inserts <sup>(1)</sup>	Ø0.126 (Ø3.2) thru-hole (no thread) inserts	TH			

**NOTES**

1. Models with thru-hole inserts cannot be equipped with a heatsink.



**COMPANY INFORMATION**

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300  
Toll Free: ☎(888)597-9255  
Fax: ☎(603)778-9797  
E-mail: [sales@wallindustries.com](mailto:sales@wallindustries.com)  
Web: [www.wallindustries.com](http://www.wallindustries.com)  
Address: 37 Industrial Drive  
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.