

Wall Industries, Inc.

DTIPU31 SERIES

**90~264VAC Input Voltage Range
Up to 30 Watts
Class I LPS, Single Output
AC/DC Desktop Power Supplies
Designed for Industrial Equipment**



FEATURES

- Class I Limited Power Source (LPS)
- Single Output
- RoHS Compliant
- Up to 30W Output Power
- Energy Star 2.0, Efficiency Level V Compliant
- Over Current Protection
- IEC-320-C14 Input Inlet
- -20°C to +70°C Operating Temperature Range
- Output Voltages Available from 5VDC to 50VDC
- Wide Input Voltage Range: 90~264VAC, 47~63Hz
- Optional Output Connectors
- UL 60950-1, CSA C22.2 No. 60950-1, and TUV/GS EN 60950-1 Safety Approvals

DESCRIPTION

The DTIPU31 series of AC/DC desktop power supplies provides up to 30 Watts of continuous output power. All models have a single output, 90~264VAC input voltage range, -20°C ~ +70°C operating temperature range, and an IEC-320-C14 AC inlet connector for worldwide applications. All supplies are RoHS, Energy Star 2.0 Level V, and UL94V-1 compliant. The DTIPU31 series meets FCC Part-15 class B and CISPR-22 class B emission limits and has UL/cUL (UL 60950-1), CSA C22.2 No. 60950-1-07, and TUV/GS (EN 60950-1) safety approvals. These supplies also meet new CE requirements and are 100% burn-in tested. This series of AC/DC power supplies are a Class I Limited Power Source (LPS)



SPECIFICATIONS: DTIPU31 Series						
All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances.						
SPECIFICATION	TEST CONDITIONS		Min	Nom	Max	Unit
INPUT SPECIFICATIONS						
Operating Voltage Range			90		264	VAC
Input Frequency			47		63	Hz
Input Current	Low Line	Io = Full Load, Vin = 115VAC			0.8	A
	High Line	Io = Full Load, Vin = 230VAC			0.5	A
Inrush Current	Low Line	Io = Full Load, 25°C, Cool Start, Vin = 115VAC		26	30	A
	High Line	Io = Full Load, 25°C, Cool Start, Vin = 230VAC		38	45	A
No Load Power Consumption	No Load, Vin=240VAC		0	0.3	0.5	W
OUTPUT SPECIFICATIONS						
Output Voltage Range			See Table			
Load Regulation	Vin = 230VAC			3	7	%
Line Regulation	Io = Full Load			0.5	1	%
Output Power Range	Vin = 90 to 264VAC		0		30	W
Output Current Range			See Table			
Ripple & Noise (peak to peak)	Full Load, Vin = 90VAC			0.5	1	%
Transient Response Time	Io = Full Load to Half Load, Vin = 100VAC				4	ms
Hold-Up Time	Io = Full Load, Vin = 110VAC		12			ms
Start-Up Time	Io = Full Load, Vin = 100VAC		0.3	1	2	s
Temperature Coefficient			-0.04		+0.04	%/°C
PROTECTION						
Over Current Protection			110		150	%
GENERAL SPECIFICATIONS						
Efficiency	Io = Full Load, Vin = 230VAC		73	81	90	%
Dielectric Withstanding Voltage For Primary to Secondary	Primary to Secondary		4242			VDC
Dielectric Withstanding Voltage For Primary to Ground	Primary to Ground		2121			VDC
Isolation Resistance	Test Voltage = 500VDC		50			MΩ
Safety Ground Leakage Current	Io = Full Load, Vin = 240VAC			0.5	0.75	mA
ENVIRONMENTAL SPECIFICATIONS						
Operating Temperature	Derate linearly from 100% Load at 40°C to 50% load at 70°C		-20		70	°C
Storage Temperature			-40		85	°C
Relative Humidity			5		95	%
MTBF	Operating Temperature at 25°C, calculated per MIL-HDBK-217F		100,000 hours			
PHYSICAL SPECIFICATIONS						
Weight			Approx. 9.35~9.88oz (265~280g)			
Dimensions (L x W x H)			4.21 x 1.85 x 1.17 inches (107.0 x 47.0 x 29.6 mm)			
AC Inlet			IEC-320-C14			
SAFETY						
Safety Approvals	UL60950-1 2 nd Edition ⁽⁵⁾ , CSA C22.2 No. 60950-1-07 2 nd Edition, TUV/GS EN60950-1, CE					
EMI Requirements for CISPR-22	Vin = 220VAC		B			Class
EMI Requirements for FCC PART-15	Vin = 110VAC		B			Class
These supplies are a Class I Limited Power Source (LPS)						

MODEL SELECTION TABLE


Model Number	Input Voltage Range	Output Voltage Range	Max. Output Current	Total Regulation ⁽³⁾	Max. Output Power
DTIPU31-102	90 ~ 264 VAC	5 ~ 6 VDC	4.00 ~ 3.33 A	5%	20W
DTIPU31-103	90 ~ 264 VAC	6 ~ 8 VDC	4.16 ~ 3.12 A	5%	25W
DTIPU31-104	90 ~ 264 VAC	8 ~ 11 VDC	3.75 ~ 2.72 A	5%	30W
DTIPU31-105	90 ~ 264 VAC	11 ~ 13 VDC	2.72 ~ 2.30 A	5%	30W
DTIPU31-106	90 ~ 264 VAC	13 ~ 16 VDC	2.30 ~ 1.87 A	5%	30W
DTIPU31-107	90 ~ 264 VAC	16 ~ 21 VDC	1.87 ~ 1.42 A	5%	30W
DTIPU31-108	90 ~ 264 VAC	21 ~ 27 VDC	1.42 ~ 1.11 A	3%	30W
DTIPU31-109	90 ~ 264 VAC	27 ~ 33 VDC	1.11 ~ 0.90 A	3%	30W
DTIPU31-110	90 ~ 264 VAC	33 ~ 40 VDC	0.90 ~ 0.75 A	3%	30W
DTIPU31-111	90 ~ 264 VAC	40 ~ 50 VDC	0.75 ~ 0.60 A	3%	30W

NOTES

- The output voltage is specified as a range (ex: 40~50VDC); the customer must specify what they would like the output voltage set at. Please call factory for more details.
- Models with an output voltage under 15VDC have been approved by TUV/PSE.
Models DTIPU31-104~111 have been approved by CEC Level V
Model DTIPU31-106 has been approved by KC.
- Models DTIPU31-102~105 need to use AWG#16/4FT output cable in order to meet the total regulation specified.
Models DTIPU31-106~108 need to use AWG#18/4FT output cable in order to meet the total regulation specified.
Models DTIPU31-109~111 need to use AWG#18/6FT output cable in order to meet the total regulation specified.
The regulation and efficiency will change if a different output cable is used.
- Optional output connectors are available. Please call factory for ordering details.
- This product is Listed to applicable standards and requirements by UL.


**Due to advances in technology, specifications subject to change without notice.*

DERATING CURVE

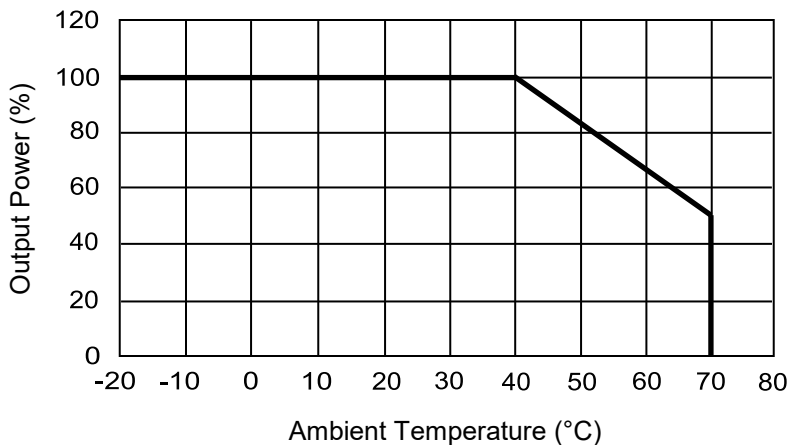

MECHANICAL DRAWING

Unit: inches (mm)

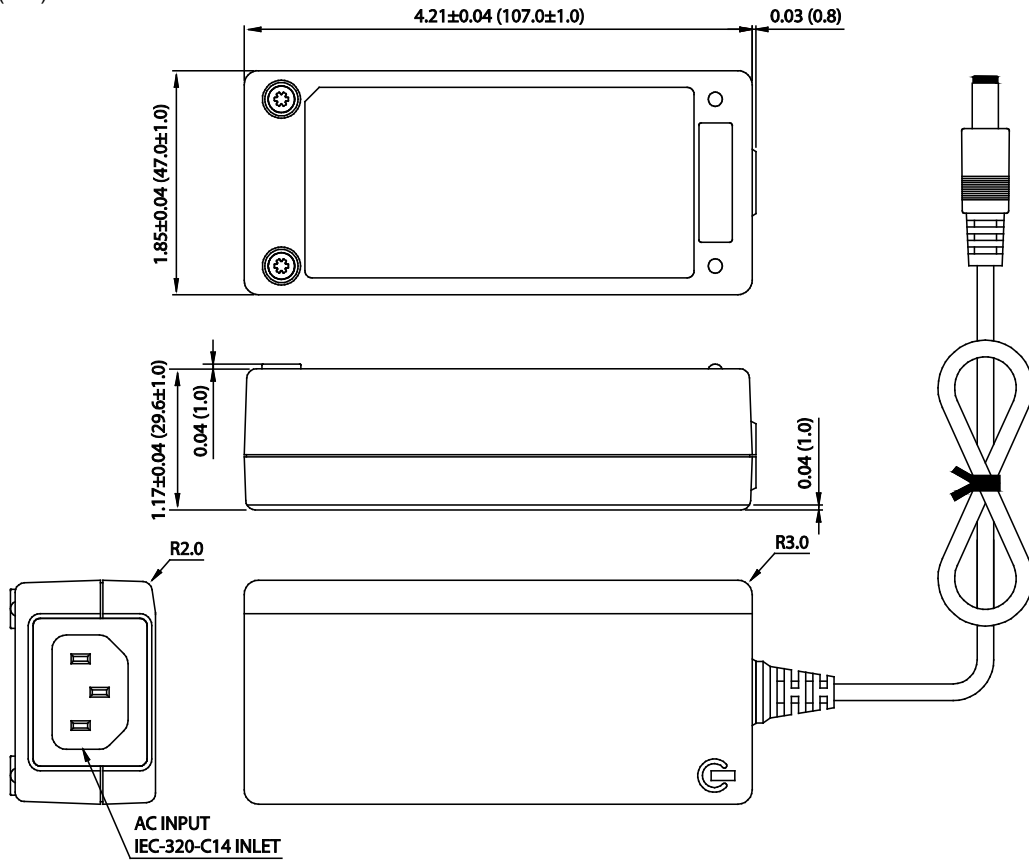

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.