


Wall Industries, Inc.

LANEUW3 SERIES

4:1 Ultra Wide Input Voltage Range
Single and Dual Outputs
0.86" x 0.36" x 0.44" SIP Package
3 Watt DC/DC Power Converters

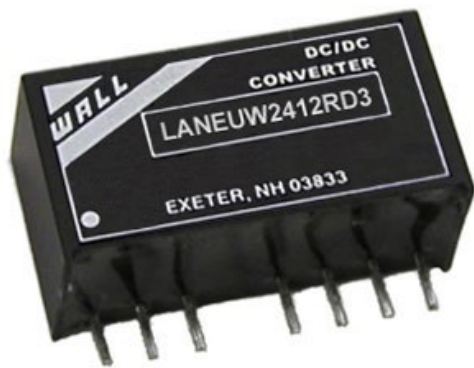

APPLICATIONS

- Wireless Networks
- Telecom / Datacom
- Industry Control Systems
- Measurement Equipment
- Semiconductor Equipment

OPTIONS

- 3000VDC I/O Isolation (Suffix "H")

DESCRIPTION

The LANEUW3 series of DC/DC power converters provides 3 Watts of output power in a 0.86" x 0.36" x 0.44" SIP package without derating up to 71°C. This series has single and dual output models with 4:1 ultra wide input voltage ranges of 4.5-18VDC, 9-36VDC, and 18-75VDC. Some features include high efficiency, low ripple and noise, 1600VDC (3000VDC optional) I/O isolation, remote ON/OFF, and continuous short circuit protection. All models are RoHS compliant and have UL60950-1, EN60950-1, and IEC60950-1 safety approvals. These converters are ideally suited for telecommunications, mobile telecom, test equipment, and industrial applications.

FEATURES

- 3 Watts Maximum Output Power
- Output Current up to 700mA
- Single and Dual Outputs
- 4:1 Ultra Wide Input Voltage Range
- 0.86 x 0.36 x 0.44 Inch SIP Package
- High Efficiency up to 82%
- 1600VDC I/O Isolation (3000VDC I/O Isolation Available)
- Low Ripple & Noise
- External ON/OFF Control
- Switching Frequency (100KHz, min)
- Continuous Short Circuit Protection
- UL94V-V0 Case Potting Materials
- ISO9001 Certified Manufacturing Facilities
- CE Mark Meets 2006/95/EC, 93/68/EEC, and 2004/108/EC
- UL60950-1, EN60950-1, and IEC60950-1 Safety Approvals
- Compliant to RoHS EU Directive 2002/95/EC

SPECIFICATIONS: LANEUW3 Series					
All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances.					
SPECIFICATION	TEST CONDITIONS	Min	Nom	Max	Unit
INPUT SPECIFICATIONS					
Input Voltage Range	12VDC nominal input models	4.5	12	18	VDC
	24VDC nominal input models	9	24	36	
	48VDC nominal input models	18	48	75	
Input Surge Voltage (100ms max)	12VDC nominal input models			36	VDC
	24VDC nominal input models			50	
	48VDC nominal input models			100	
Input Reflected Ripple Current (See Note 6)	12VDC nominal input models		25		mAp-p
	24VDC nominal input models		10		
	48VDC nominal input models		8		
Input Filter		Capacitor type			
OUTPUT SPECIFICATIONS					
Output Voltage		See Table			
Line Regulation	Low line to high line at full load	-0.2		+0.2	%
Load Regulation	No load to full load	-1.0		+1.0	%
	5% load to 100% load	-0.5		+0.5	
Cross Regulation (Dual Output Models)	Asymmetrical load 25%/100% full load	-5		+5	%
Voltage Accuracy	Full load an nominal Vin	-1		+1	%
Output Power				3	W
Output Current		See Table			
Ripple & Noise (20MHz Bandwidth)	Nominal Vin and full load		30		mVp-p
Transient Response Recovery Time	25% load step change		250		µs
Start-Up Time	Nominal Vin and constant resistive load	Power Up		30	ms
		Remote ON/OFF		30	
Minimum Load		0			%
Temperature Coefficient		-0.02		+0.02	%/°C
PROTECTION					
Short Circuit Protection		continuous, automatic recovery			
GENERAL SPECIFICATIONS					
Efficiency	Nominal Vin and full load	See Table			
Switching Frequency	Full load to minimum load	100			KHz
Isolation Voltage (Input to Output)	Standard	1600			VDC
	Suffix "H"	3000			
Isolation Resistance		10			GΩ
Isolation Capacitance	Standard			200	pF
	Suffix "H" (See Note 9)			40	
REMOTE ON/OFF (See Page 4 for application circuits)					
Remote ON/OFF	DC/DC ON	Open or high impedance			
	DC/DC OFF	Control pin applied current 2 ~ 4mA max. (via 1KΩ)			
Remote Off State Input Current	Nominal Vin			2.5	mA
ENVIRONMENTAL SPECIFICATIONS					
Operating Ambient Temperature	Without derating	-40		+71	°C
	With derating	+71		+100	
Storage Temperature		-55		+125	°C
Relative Humidity		5		95	% RH
Thermal Shock		MIL-STD-810F			
Vibration		MIL-STD-810F			
MTBF (See Note 1)	BELLCORE TR-NWT-000332			3,963,000 hours	
	MIL-HDBK-217F			1,707,000 hours	
PHYSICAL SPECIFICATIONS					
Case Material		Non-conductive black plastic			
Base Material		None			
Potting Material		Silicon (UL94-V0)			
Weight		0.17oz (4.8g)			
Dimensions (L x W x H)		0.86 x 0.36 x 0.44 inches (21.8 x 9.2 x 11.1 mm)			
SAFETY & EMC CHARACTERISTICS					
Safety Approvals		IEC60950-1, UL60950-1 ⁽⁰⁾ , EN60950-1			
EMI (See Note 6)	EN55022				Class A
ESD	EN61000-4-2	Air	±8KV		Perf. Criteria A
		Contact	±6KV		
Radiated Immunity	EN61000-4-3		10 V/m		Perf. Criteria A
Fast Transient (See Note 7)	EN61000-4-4		±2KV		Perf. Criteria A
Surge (See Note 7)	EN61000-4-5		±1KV		Perf. Criteria A
Conducted Immunity	EN61000-4-6		10 Vrms		Perf. Criteria A

MODEL SELECTION TABLES



SINGLE OUTPUT MODELS										
Model Number	Input Voltage	Output Voltage	Output Current		Input Current		Output ⁽⁴⁾ Ripple & Noise	Efficiency ⁽⁴⁾	Maximum ⁽⁵⁾ Capacitive Load	Output Power
			Min Load	Full Load	No Load ⁽³⁾	Full Load ⁽²⁾				
LANEUW1233R3	12 VDC (4.5 – 18 VDC)	3.3 VDC	0mA	700mA	35mA	285mA	30mVp-p	74%	3300µF	2.3W
LANEUW1205R3		5 VDC	0mA	600mA	40mA	338mA	30mVp-p	78%	1680µF	3W
LANEUW1209R3		9 VDC	0mA	333mA	40mA	333mA	30mVp-p	79%	1000µF	3W
LANEUW1212R3		12 VDC	0mA	250mA	40mA	329mA	30mVp-p	80%	820µF	3W
LANEUW1215R3		15 VDC	0mA	200mA	40mA	329mA	30mVp-p	80%	680µF	3W
LANEUW2433R3	24 VDC (9 – 36 VDC)	3.3 VDC	0mA	700mA	20mA	140mA	30mVp-p	75%	3300µF	2.3W
LANEUW2405R3		5 VDC	0mA	600mA	20mA	165mA	30mVp-p	80%	1680µF	3W
LANEUW2409R3		9 VDC	0mA	333mA	19mA	165mA	30mVp-p	80%	1000µF	3W
LANEUW2412R3		12 VDC	0mA	250mA	20mA	160mA	30mVp-p	82%	820µF	3W
LANEUW2415R3		15 VDC	0mA	200mA	19mA	160mA	30mVp-p	82%	680µF	3W
LANEUW4833R3	48 VDC (18 – 75 VDC)	3.3 VDC	0mA	700mA	12mA	71mA	30mVp-p	74%	3300µF	2.3W
LANEUW4805R3		5 VDC	0mA	600mA	12mA	82mA	30mVp-p	80%	1680µF	3W
LANEUW4809R3		9 VDC	0mA	333mA	13mA	82mA	30mVp-p	80%	1000µF	3W
LANEUW4812R3		12 VDC	0mA	250mA	14mA	81mA	30mVp-p	81%	820µF	3W
LANEUW4815R3		15 VDC	0mA	200mA	14mA	81mA	30mVp-p	81%	680µF	3W

DUAL OUTPUT MODELS										
Model Number	Input Voltage	Output Voltage	Output Current		Input Current		Output ⁽⁴⁾ Ripple & Noise	Efficiency ⁽⁴⁾	Maximum ⁽⁵⁾ Capacitive Load	Output Power
			Min Load	Full Load	No Load ⁽³⁾	Full Load ⁽²⁾				
LANEUW1205RD3	12 VDC (4.5 – 18 VDC)	±5 VDC	0mA	±300mA	40mA	329mA	30mVp-p	80%	±1000µF	3W
LANEUW1212RD3		±12 VDC	0mA	±125mA	40mA	329mA	30mVp-p	80%	±470µF	3W
LANEUW1215RD3		±15 VDC	0mA	±100mA	40mA	329mA	30mVp-p	80%	±330µF	3W
LANEUW2405RD3	24 VDC (9 – 36 VDC)	±5 VDC	0mA	±300mA	25mA	167mA	30mVp-p	79%	±1000µF	3W
LANEUW2412RD3		±12 VDC	0mA	±125mA	25mA	162mA	30mVp-p	81%	±470µF	3W
LANEUW2415RD3		±15 VDC	0mA	±100mA	25mA	162mA	30mVp-p	81%	±330µF	3W
LANEUW4805RD3	48 VDC (18 – 75 VDC)	±5 VDC	0mA	±300mA	14mA	84mA	30mVp-p	79%	±1000µF	3W
LANEUW4812RD3		±12 VDC	0mA	±125mA	14mA	81mA	30mVp-p	81%	±470µF	3W
LANEUW4815RD3		±15 VDC	0mA	±100mA	14mA	81mA	30mVp-p	81%	±330µF	3W

NOTES


- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25°C, Full load (Ground, Benign, controlled environment).
- Maximum value at nominal input voltage and full load.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistive load.
- The LANEUW3 series meets EN55022 Class A and input reflected ripple current with an external L-C filter before the input pins to the converter. (See Class B figure for connecting network)
Recommended: 12Vin: C1=4.7µF/25V 1812 MLCC L1=2.2µH 0504 SMD Inductor P/N: PMT-059
24Vin: C1=2.2µF/50V 1812 MLCC L1=10µH 0504 SMD Inductor P/N: PMT-047
48Vin: C1=2.2µF/100V 1812 MLCC L1=10µH 0504 SMD Inductor P/N: PMT-047
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor suggested is Nippon chemi-con KY series, 100µF /100V, ESR 110mΩ.
- To order 3000VDC I/O isolation version, add the suffix “H” to the model number (Ex: LANEUW2405R3H).
- CAUTION:** This power module is not internally fused. An input line fuse must always be used.
- This product is Listed to applicable standards and requirements by UL.
**Due to advances in technology, specifications are subject to change without notice.*

REMOTE ON/OFF APPLICATION CIRCUITS

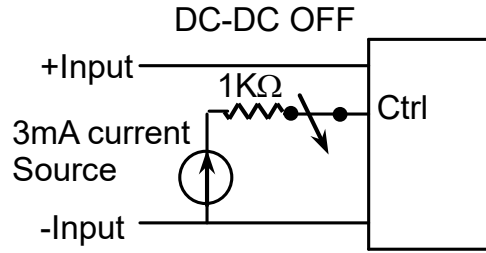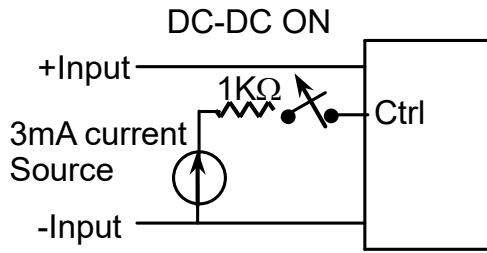


CHARACTERISTICS


LANEUW2405R3 Derating Curve

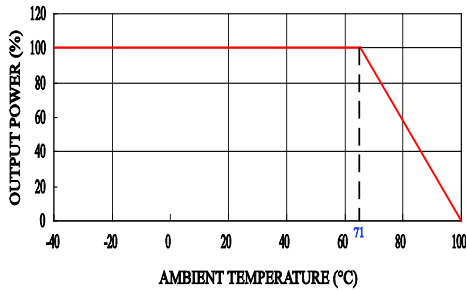


LANEUW2405R3 Efficiency vs Input Voltage

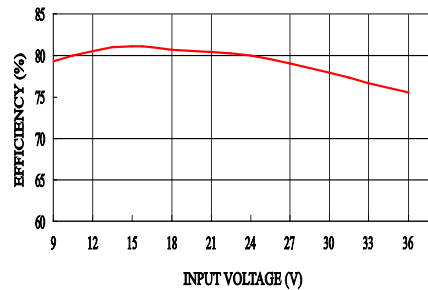


LANEUW2405R3 Efficiency vs Output Load

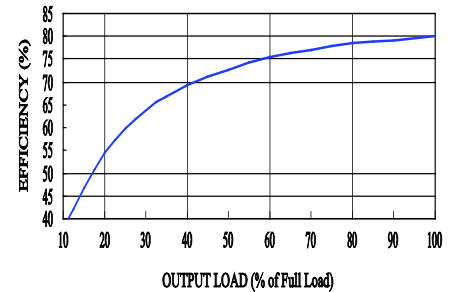

Recommended Filter for EN55022 Class B Compliance

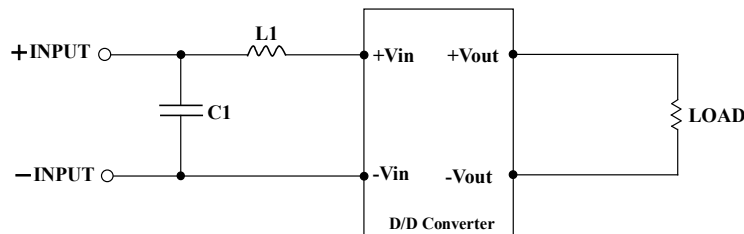

Recommended EN55022 Class B Filter Circuit Layout

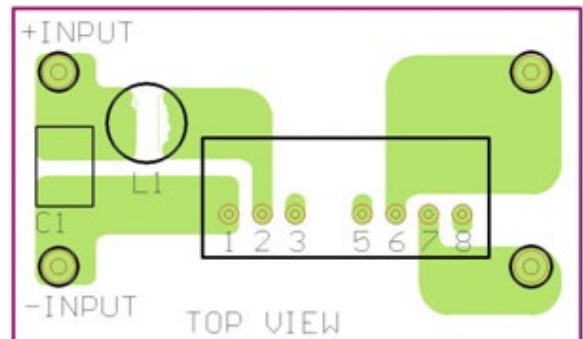


The components used in the figure above are as follows

	C1	L1
LANEUW12xxx	10μF/25V 1812 MLCC	2.2μH 0504 SMD Inductor PMT-059
LANEUW24xxx	6.8μF/50V 1812 MLCC	18μH 0504 SMD Inductor PMT-046
LANEUW48xxx	2.2μF/100V 1812 MLCC	18μH 0504 SMD Inductor PMT-046

MECHANICAL DRAWINGS

Unit: inches (mm)

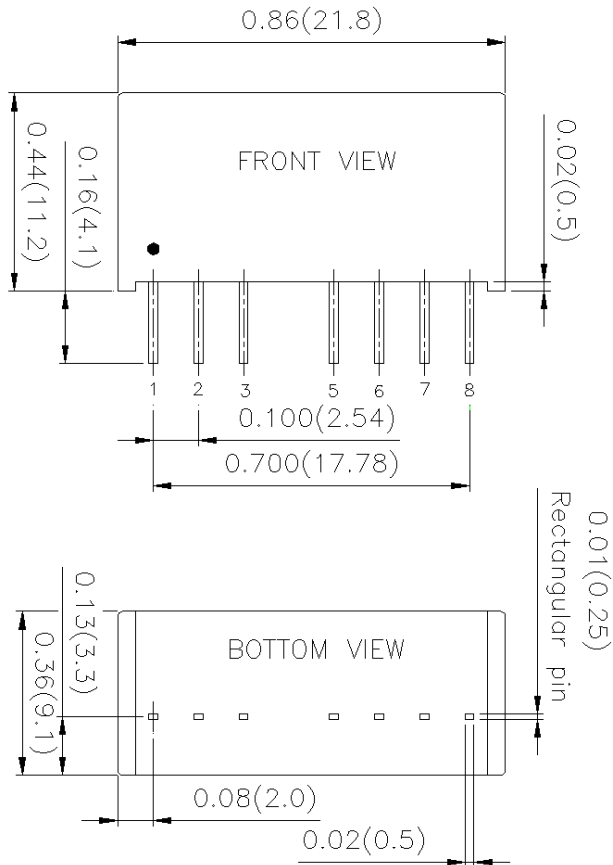

PIN CONNECTIONS		
Pin	Single	Dual
1	-Input	-Input
2	+Input	+Input
3	CTRL	CTRL
5	NC* / No Pin**	NC* / No Pin**
6	+Output	+Output
7	-Output	COM
8	NC	-Output

* NC pin for standard version

** No Pin for 3KV isolation version (suffix "H")

1. Tolerance: $x.xx \pm 0.02$ ($x.x \pm 0.5$)
 $x.xxx \pm 0.01$ ($x.xx \pm 0.25$)
2. Pin Pitch Tolerance: ± 0.01 (0.25)

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
 Toll Free: ☎ (888)597-9255
 Fax: ☎ (603)778-9797
 E-mail: sales@wallindustries.com
 Web: www.wallindustries.com
 Address: 37 Industrial Drive
 Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.