



Size: 11.024 x 6.693 x 2.500 in
280.00 x 170.00 x 63.50 mm

Weight: 8.38 lbs (3.8kg)

FEATURES

- RoHS Compliant
- 3000 Watts Output Power
- High Efficiency up to 93%
- 3000VAC (4242VDC) I/O Isolation
- Constant Current Limiting
- Global Control via RS232
- Power OK Signal
- High Power Density 16.3W/in³
- UL60950-1 & EN60950-1 Safety Approvals
- Remote Setting Multiple PSU via RS232, RS485 & I²C
- Programmable Output Voltage (0~105%)
- Programmable Output Current (0~105%)
- Universal Input Voltage Range: 90~264VAC (127~370VDC)
- Single Outputs Ranging from 150VDC to 400VDC
- Selectable +5V/0.5A or +9V/0.3A Auxiliary Output
- Forced Current Sharing at Parallel Operation
- Remote ON/OFF Function
- Protection: OLP, OVP, OTP, SCP, Fan Failure

DESCRIPTION

The PSAEK3000HV series of AC/DC switching power supplies provides 3000 Watts of output power in an 11.024" x 6.693" x 2.500" enclosed case. This series consists of single output models ranging from 150VDC to 400VDC with a universal input voltage range of 90~264VAC (127~370VDC). Standard features include high efficiency up to 93%, programmable output voltage and output current, remote on/off, and power OK signal. This series also has over temperature, over voltage, over load, and short circuit protection. All models are RoHS compliant and have UL60950-1 and EN60950-1 safety approvals.


MODEL SELECTION TABLE

Model Number	Input Voltage ⁽²⁾	Output Voltage	Output Current	Line Regulation	Load Regulation	Output Power	Ripple & Noise ⁽¹⁾	Efficiency
PSAEK-3000HV-150	90~264 VAC (127~370 VDC)	150 VDC	20A	±1.0%	±1.0	3000W	1500mVp-p	93%
PSAEK-3000HV-200		200 VDC	15A	±1.0%	±1.0	3000W	1500mVp-p	93%
PSAEK-3000HV-250		250 VDC	12A	±1.0%	±1.0	3000W	1500mVp-p	93%
PSAEK-3000HV-300		300 VDC	10A	±1.0%	±1.0	3000W	1500mVp-p	93%
PSAEK-3000HV-400		400 VDC	7.5A	±1.0%	±1.0	3000W	1500mVp-p	93%

NOTES

1. Ripple & noise is measured at 20MHz limited bandwidth and using a 12" twisted pair-wire terminated with a 0.1µF & 47µF capacitors in parallel.
2. For voltages near the low end of the input voltage range, see the derating curve for the power supply output rating.
3. When in parallel operation only one unit might operate if the total output load is less than 5% of the rated load condition.
4. The power supply is considered a component which will be installed into final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

DERATING CURVES

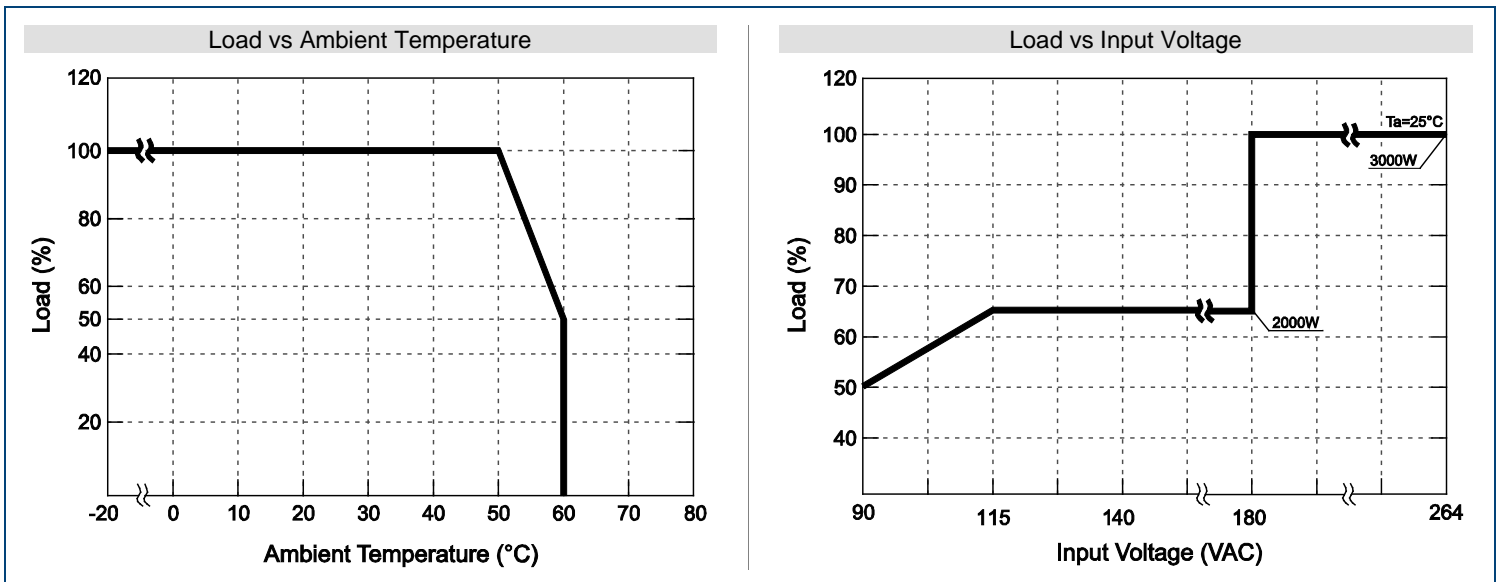


SPECIFICATIONS: PSAEK3000HV SERIES

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
INPUT SPECIFICATIONS					
Input Voltage (See Note 2)	AC input voltage range	90		264	VAC
	DC input voltage range	127		370	VDC
Input Frequency		47		63	Hz
AC Current	At 115VAC (2000W)		19.7		A
	At 230VAC (3000W)		14.5		
Inrush Current	At 115VAC and cold start		33		A
	At 230VAC and cold start		65		
Power Factor	At 115VAC and full load	0.98			
	At 230VAC and full load	0.95			
OUTPUT SPECIFICATIONS					
Output Voltage		See Table			
Voltage Tolerance	Includes set-up tolerance, line regulation, and load regulation	-2.0		+2.0	%
Voltage Adjustability	Typical adjustment by potentiometer (VR1)	-5.0		+5.0	%
Line Regulation	Low Line to High Line	-1.0		+1.0	%
Load Regulation	0% to 100% full load	-1.0		+1.0	%
Output Power		See Table			
Output Current		See Table			
Ripple & Noise (20MHz BW)	Measured with 0.1µF and 47µF capacitors in parallel		1500		mVp-p
Hold-up Time	At 230VAC and full load	14			ms
Setup Time	full load		800		ms
Rise Time	full load		50		ms
Temperature Coefficient	0~50°C	-0.02		+0.02	%/°C
PROTECTION					
Over Voltage Protection (see page 4)	Protection type: latch-style. Recovery after reset AC power ON or inhibit	Variable OVP, 120%±7% Vout			
Over Load Protection	Protection type: constant current limit	105% rated output power			
Over Temperature Protection	Protection type: auto-recovery after temperature goes down	85°C±5°C detect on heatsink of pri. & sec. side			
GENERAL SPECIFICATIONS					
Efficiency			93		%
Isolation Voltage	Input to Output	3000VAC (4242VDC)			
	Input to FG	1500VAC (2121VDC)			
	Output to FG	500VAC (707VDC)			
Isolation Resistance	Input to Output	500VDC	100		MΩ
	Input to FG	500VDC	100		
	Output to FG	500VDC	100		
Leakage Current	At 240VAC			1.0	mA
FUNCTIONS					
Auxiliary Power		Selectable +5V/0.5A or +9V/0.3A aux. output			
Remote ON/OFF Control (see page 5)	Isolated from output	By external switch			
Power OK Signal	Sink Current: 20mA max.; Drain Voltage: 40V max.	Open drain signal low when PSU turns on			
Output Voltage Trim		0		105	%Vo
Output Current Trim		0		105	%Io
Parallel Operation (Current Sharing)		See page 5			
ENVIRONMENTAL SPECIFICATIONS					
Operating Temperature	See derating curve	-20		+60	°C
Storage Temperature		-40		+85	°C
Operating Humidity	Non-condensing	20		90	% RH
Storage Humidity		10		95	% RH
Cooling		Load and temperature control fan			
Vibration	10~500Hz, 5G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes. Certified IEC60068-2-6, IEC60068-2-64				
PHYSICAL SPECIFICATIONS					
Weight		8.38 lbs (3.8kg)			
Dimensions (W x H x D)		11.024 x 6.693 x 2.500 inches (280.00 x 170.00 x 63.50 mm)			
SAFETY & EMC (See Note 4)					
Safety Approvals		UL60950-1; EN60950-1			
EMI (Conduction & Radiation)		EN55022, EN61204-3, EN61000-6-3			
Harmonic & Flicker		EN61000-3-2; EN61000-3-3			
EMS Immunity		EN55024; EN61204-3; EN61000-6-1; IEC61000-4-2, 3, 4, 5, 6, 8, 11			

MECHANICAL DRAWING

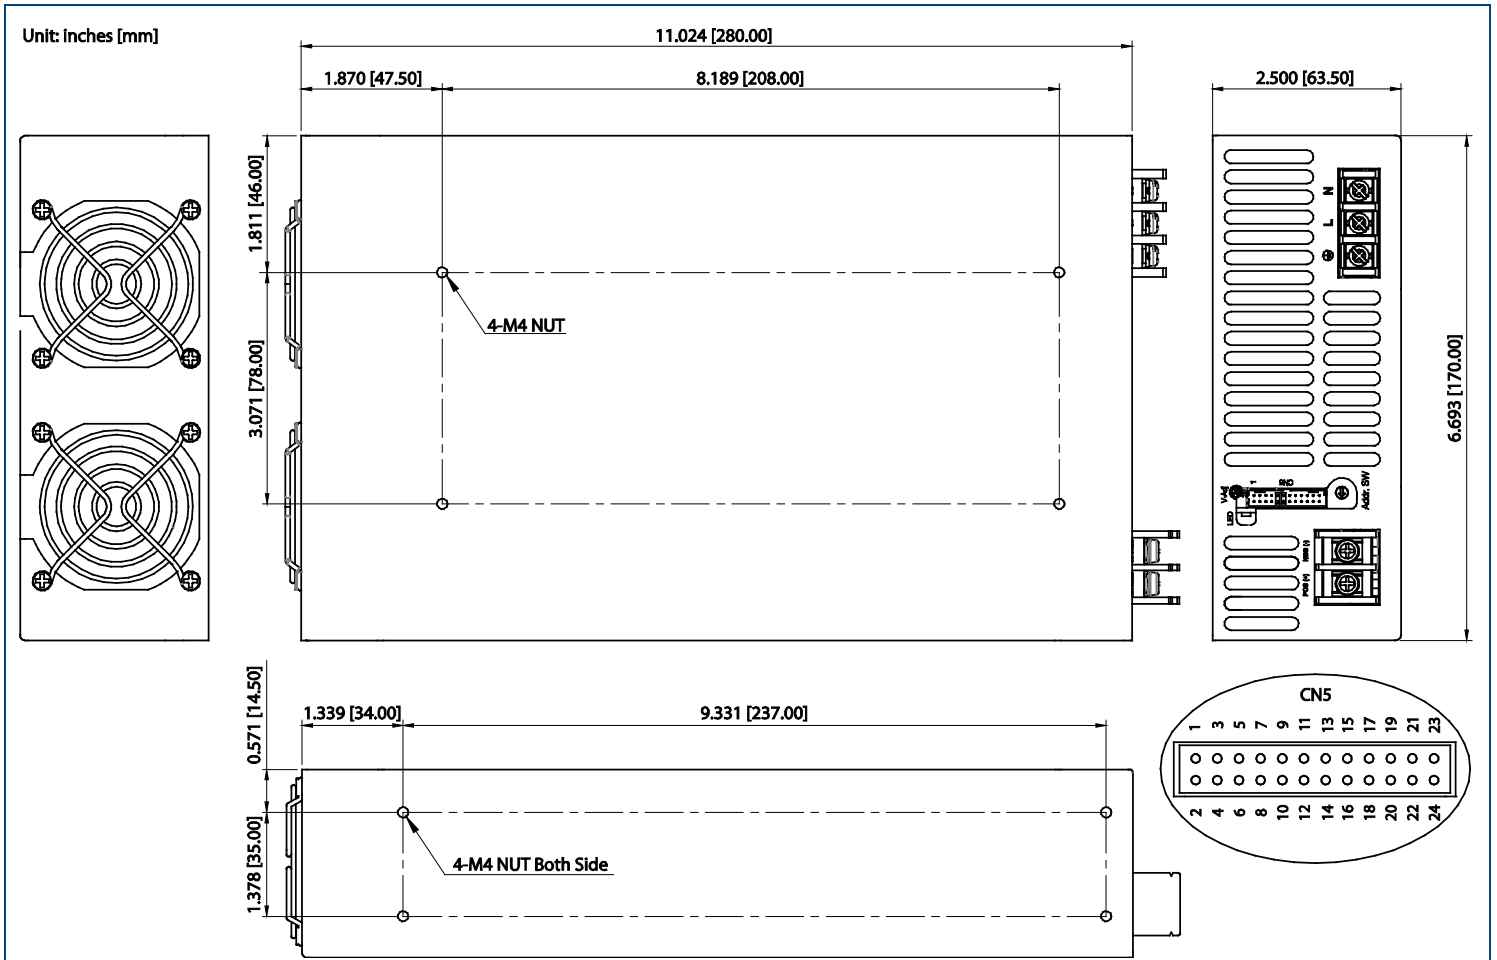









AC Input Terminal	
Pin	Function
1	ACL
2	ACN
3	⏏

Control Pin Number Assignment (CN5): JST S24B-PHDSS or Equivalent						
Pin	Function	Description	Pin	Function	Description	
1	NC	No Connect	13	ACI	I Program	
2	NC	No Connect	14	GND	Ground	
3	NC	No Connect	15	VCI	V Program	
4	NC	No Connect	16	GND	Ground	
5	POK	Power OK	17	AUX	+5V/0.5A or +9V/0.3A Auxiliary Power	
6	GND	Ground	18	GND	Ground	
7	PAR	Parallel Operation Current Sharing	19	SCL	Serial Clock used in the I ² C Interface	
8	VSET	AUX Output Set	20	SDA	Serial Data used in the I ² C Interface	
9	EN-	Inhibit ON/OFF (-)	21	AUX	+5V/0.5A or +9V/0.3A Auxiliary Power	
10	GND	Ground	22	GND	Ground	
11	EN+	Inhibit ON/OFF (+)	23	NC	For RS232 Transmission Function	
12	AUX	+5V/0.5A or +9V/0.3A Auxiliary Power	24	NC	For RS232 Receiver Function	


Mating Housing / contact: JST PHDR-24VS or equivalent and JST SPHD-002T-P0.5 or equivalent

LED STATUS


LED	LED Signal	Status
Solid (Green)		Power OK (Local Mode)
Solid (Orange)		Power OK (Remote Mode)
Slow Blink (Green)		Power Standby
Fast Blink (Red)		Over Voltage Protection (OVP)
Solid (Red)		Over Load Protection (OLP)
Slow Blink (Red)		Over Temperature Protection (OTP)
Intermittent Blink (Red)		Fan Failure
Interlace Blink (Red)		Power Failure

- * Local mode: Use ACI/VCI to control output current and voltage
- * Remote Mode: Use RS232 or I²C command to control output current and voltage


CURVES

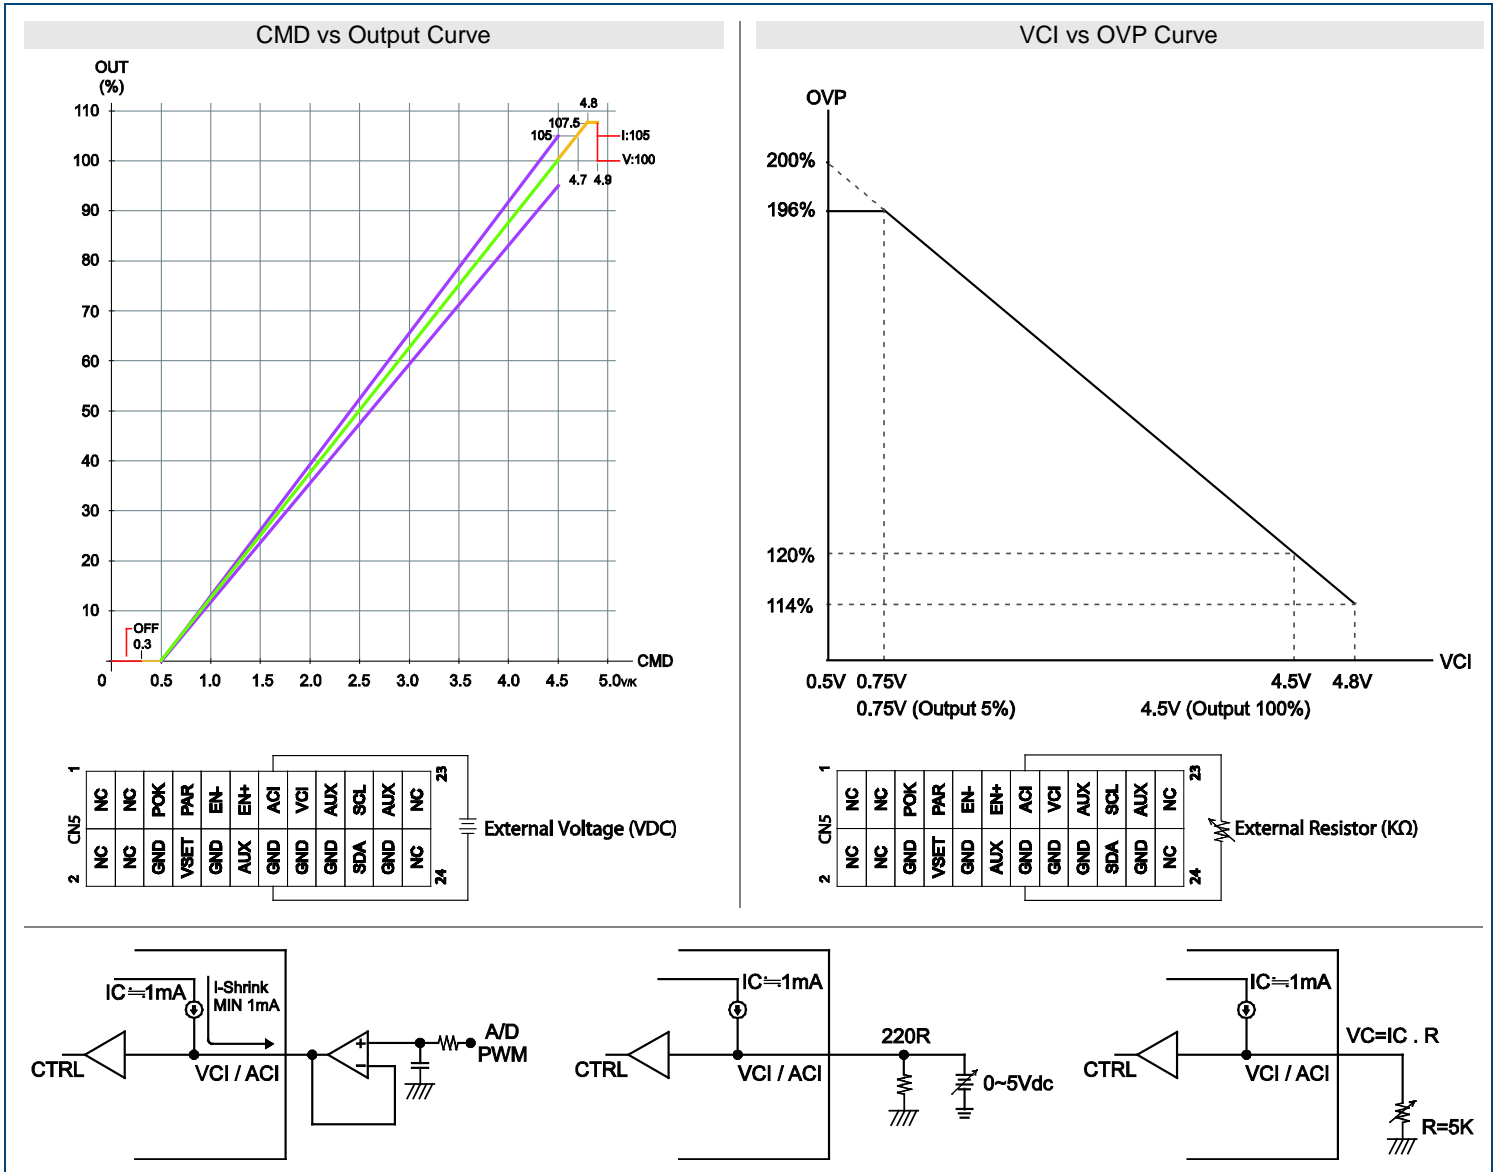


CURRENT SHARING

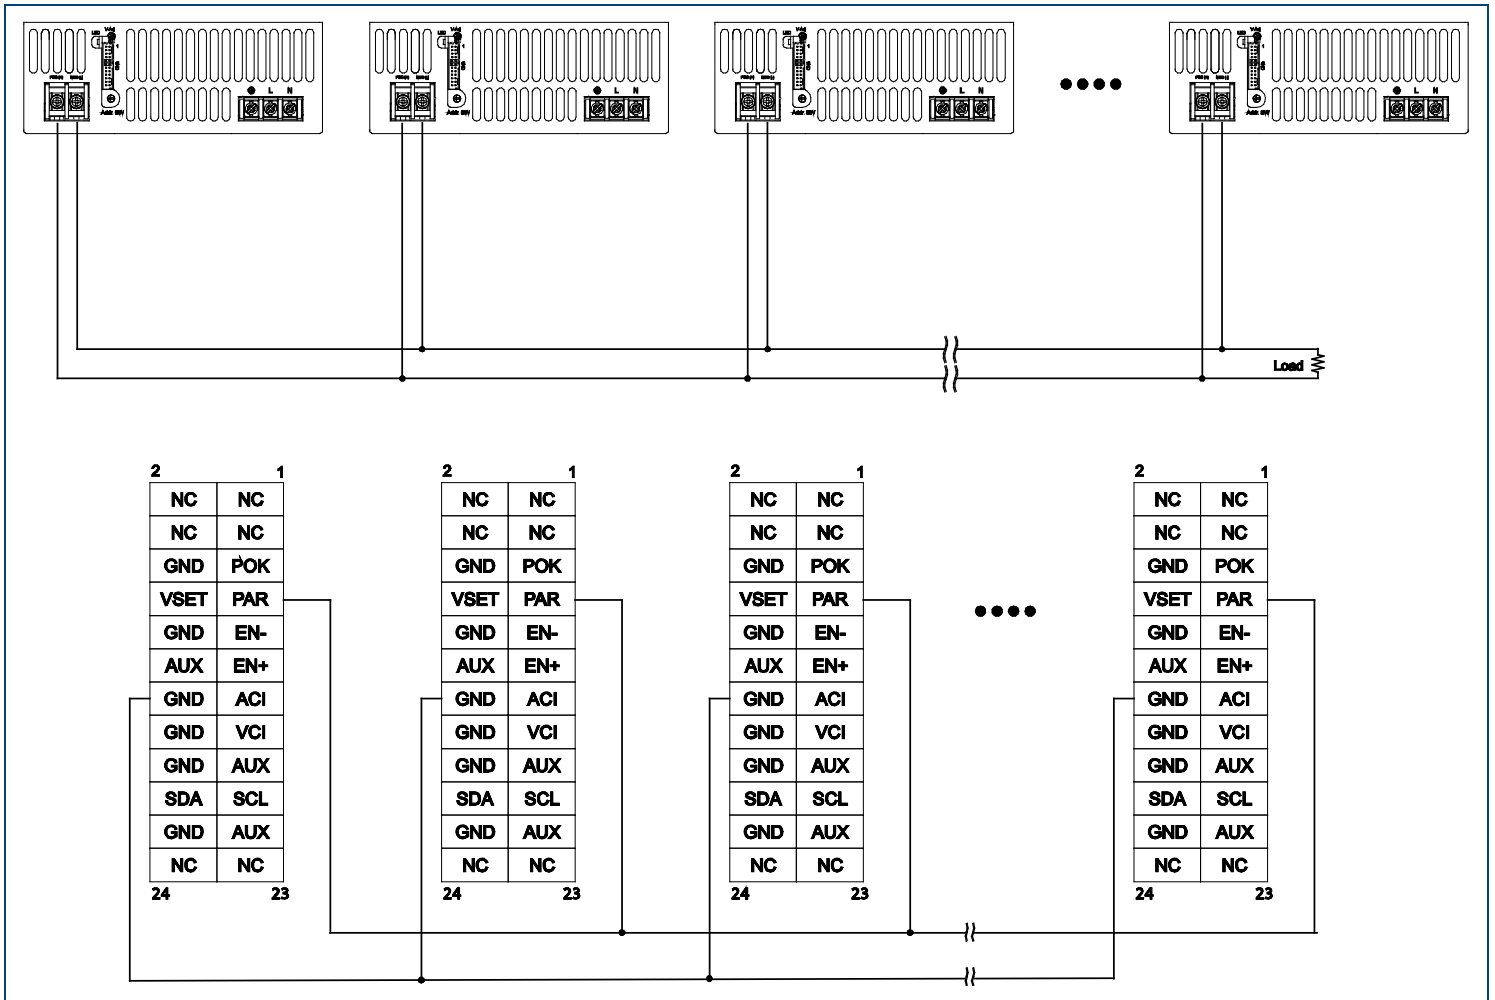

REMOTE ON/OFF

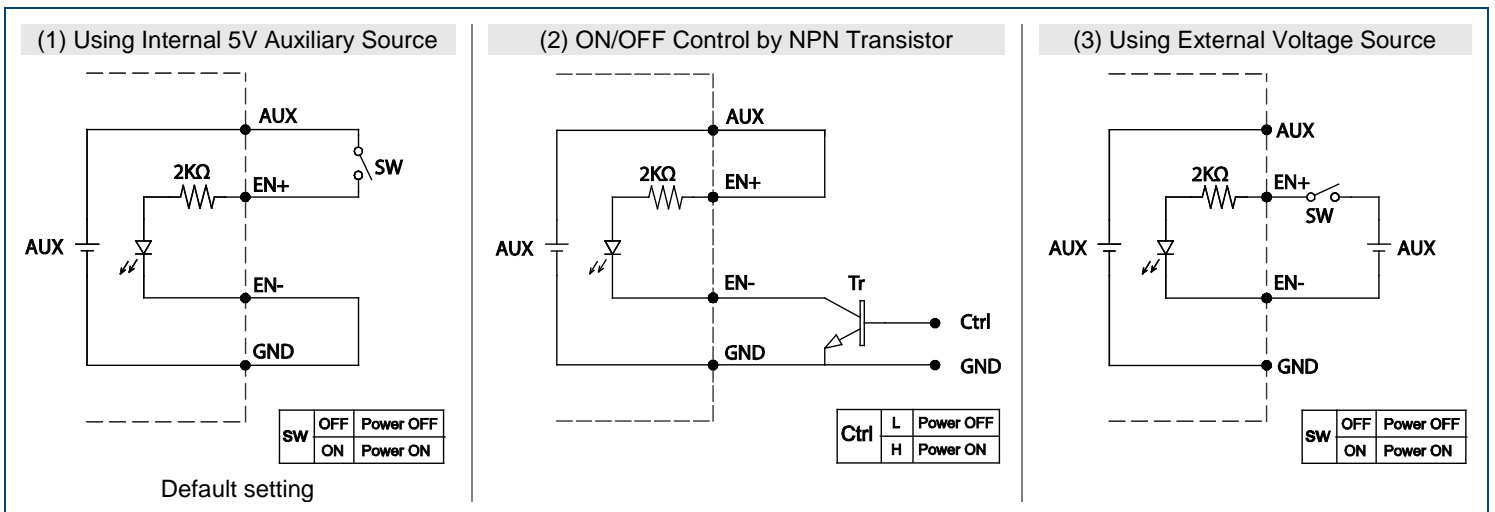


POWER OK SIGNAL

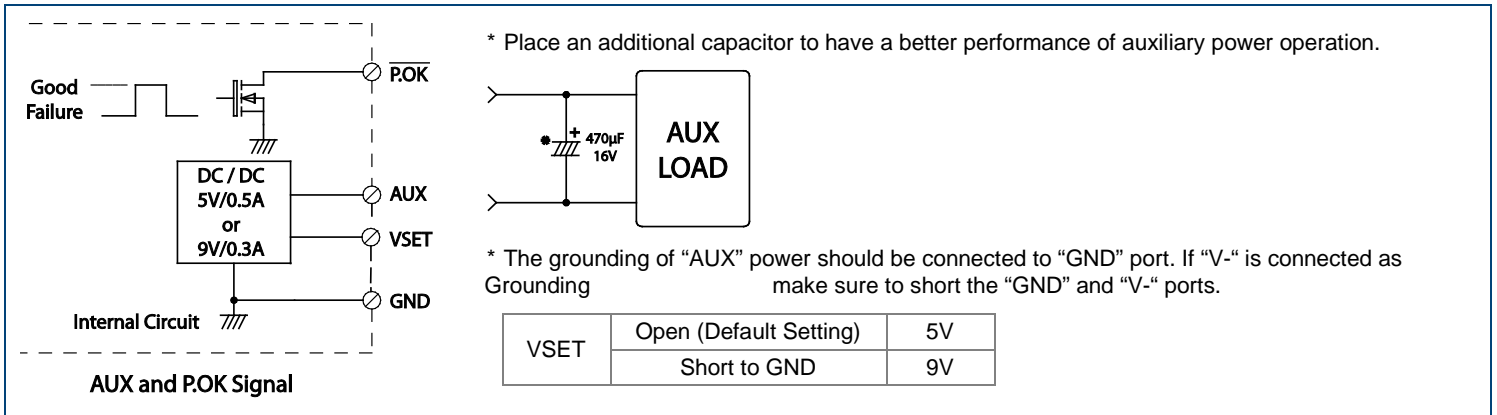

INSTALLATION INSTRUCTIONS

1. Mounting Directions

1-1 Recommended Standard Mounting Methods

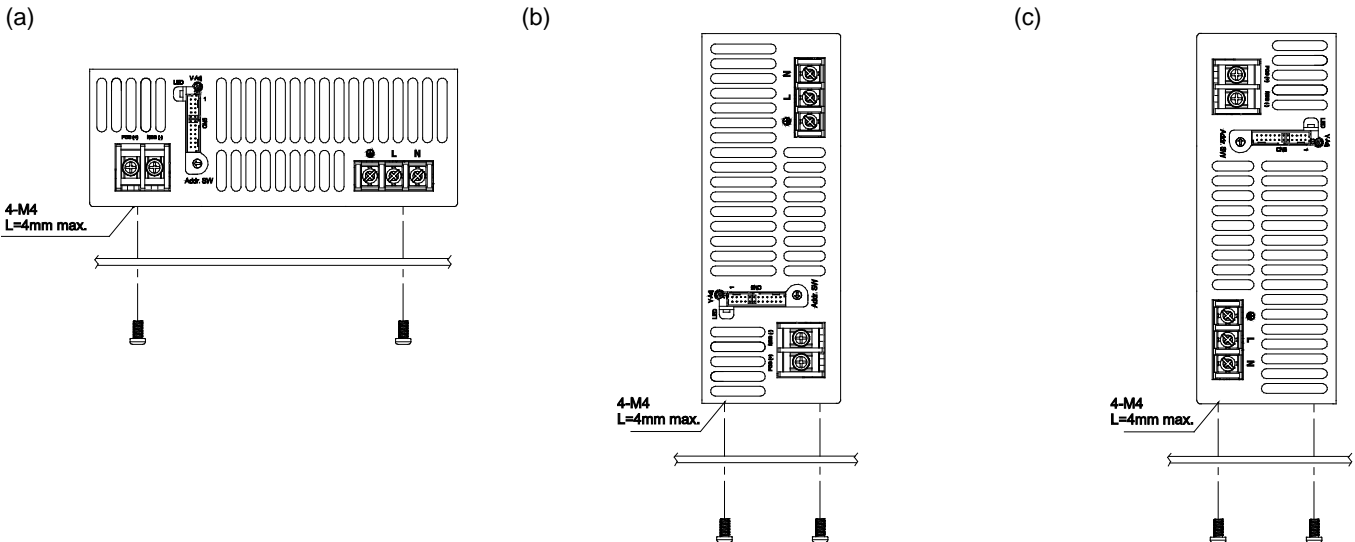


2. Mounting Method

2-1 There are ventilating holes on the front and back side panels. Do not obstruct; allow at least 50mm for airflow

2-2 The maximum allowable penetration for the screw is 4mm. Incomplete threading should not be penetrated.

2-3 Recommended torque of mounting screw: M4 screw: 1.27N • m (13.0kgf • cm)

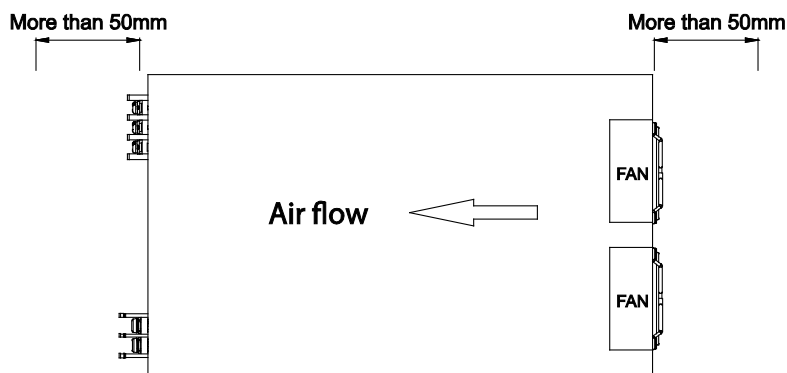

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833