



Size:  
1.48 x 1.10 x 1.08 inches  
37.5 x 28.0 x 27.4 mm

**FEATURES**

- RoHS Compliant
- Isolation Class II
- Up to 9 Watts Output Power
- Low Ripple and Noise
- Single and Dual Outputs
- UL/cUL & CE Safety Approvals
- PCB Mountable Switching Power Supply
- Fully Encapsulated Plastic Case
- -40°C to +70°C Operating Temperature Range
- < 0.3W No Load Power Consumption
- Universal Input Voltage Range: 90-305VAC (120-430VDC)
- Short Circuit, Over Power, and Over Voltage Protection

**DESCRIPTION**

The PSALC series of AC/DC switching power supplies provides up to 9 watts of output power in a 1.48" x 1.10" x 1.08" encapsulated PCB mountable package. This series consists of single and dual output models with a universal input range of 90-305VAC (120-430VDC). Some features include low ripple and noise, -40°C to +70°C operating temperature range, and over power, over voltage, and short circuit protection. All models are RoHS compliant and have UL/cUL and CE safety approvals.

**MODEL SELECTION TABLE**

**SINGLE OUTPUT MODELS**



Model Number	Input Voltage	Output Voltage	Output Current		Voltage Accuracy	Line Regulation	Load Regulation (0% - 100%)	Output Power	Efficiency	Maximum Capacitive Load
			Min Load	Max Load						
PSALC-3.3S	90~305 VAC (120~430 VDC)	3.3 VDC	0%	2000mA	±2%	±0.2%	±3%	6.6W	69%	17,000µF
PSALC-5S		5 VDC	0%	1600mA	±2%	±0.2%	±2%	8W	75%	22,000µF
PSALC-8S		8 VDC	0%	1000mA	±2%	±0.2%	±0.5%	8W	78%	6000µF
PSALC-9S		9 VDC	0%	888mA	±2%	±0.2%	±0.5%	8W	79%	6000µF
PSALC-12S		12 VDC	0%	666mA	±2%	±0.2%	±0.5%	8W	79%	3200µF
PSALC-14S		14 VDC	0%	571mA	±2%	±0.2%	±0.5%	8W	80%	1880µF
PSALC-15S		15 VDC	0%	533mA	±2%	±0.2%	±0.5%	8W	80%	1880µF
PSALC-24S		24 VDC	0%	335mA	±2%	±0.2%	±0.5%	8W	81%	1760µF

**DUAL OUTPUT MODELS**

Model Number	Input Voltage	Output Voltage	Output Current		Voltage Accuracy	Line Regulation	Load Regulation (10% - 100%)	Output Power	Efficiency	Maximum Capacitive Load
			Min Load <sup>(1)</sup>	Max Load						
PSALC-5S3.3S	90~305 VAC (120~430 VDC)	5 VDC	25%	1600mA	±2%	±0.2%	±0.5%	9W	73%	4500µF
		3.3 VDC		310mA	±15%	±3%	±5%			3800µF
PSALC-8S5S		8 VDC	25%	1000mA	±2%	±0.2%	±0.5%	8.5W	78%	800µF
		5 VDC		100mA	±10%	±3%	±5%			3800µF
PSALC-12S5S		12 VDC	25%	666mA	±2%	±0.2%	±0.5%	8.5W	79%	260µF
		5 VDC		100mA	±10%	±3%	±5%			3800µF

- NOTES**
1. Dual output models require a minimum loading on the output to maintain specified regulations. Operation under no-load conditions will not damage these devices; however, they may not meet all listed specifications.
  2. This product is Listed to applicable standards and requirements by UL.
- \*Due to advances in technology, specifications subject to change without notice.*

**BLOCK DIAGRAMS**

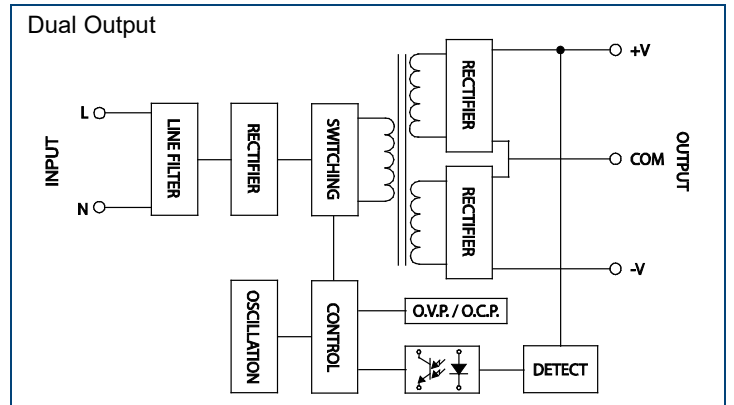
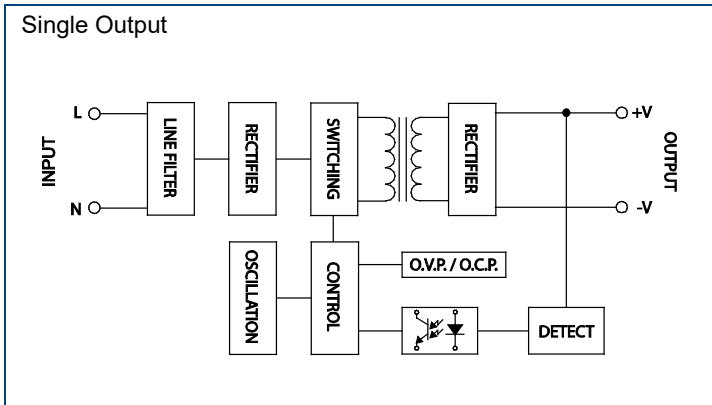


**SPECIFICATIONS: PSALC SERIES**


All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.  
We reserve the right to change specifications based on technological advances.

SPECIFICATION		TEST CONDITIONS	Min	Typ	Max	Unit
<b>INPUT SPECIFICATIONS</b>						
Input Voltage	AC input voltage range		90		305	VAC
	DC input voltage range		120		430	VDC
Input Frequency			47		440	Hz
Input Current	At 115VAC and full load				190	mA
	At 230VAC and full load				120	
Inrush Current (<500µs)	At 115VAC				25	A
	At 230VAC				45	
No Load Power Consumption					0.3	W
External Fuse (recommended)			2A slow blow type			
<b>OUTPUT SPECIFICATIONS</b>						
Output Voltage			See Table			
Voltage Accuracy			See Table			
Line Regulation	Low Line to High Line		See Table			
Load Regulation			See Table			
Output Power			See Table			
Output Current			See Table			
Minimum Load	Single Output Models		0			%
	Dual Output Models		25			
Ripple	3.3~15VDC Output Models	Measured at 20MHz BW with 0.1µF and 47µF capacitors in parallel			100	mVp-p
	24VDC Output Model				150	
	Dual Output Models				100	
Noise	3.3~15VDC Output Models	Measured at 20MHz BW with 0.1µF and 47µF capacitors in parallel			150	mVp-p
	24VDC Output Model				200	
	Dual Output Models				150	
Max Capacitive Load			See Table			
Hold-Up Time			10			ms
Temperature Coefficient			-0.02		+0.02	%/°C
<b>PROTECTION</b>						
Short Circuit Protection			Hiccup mode, indefinite (auto-recovery)			
Over Voltage Protection			Zener diode clamp			
Over Power Protection			Hiccup mode, auto-recovery			
<b>GENERAL SPECIFICATIONS</b>						
Efficiency			See Table			
Switching Frequency			124	132	140	KHz
Isolation Voltage (Input to Output)			3000			VAC
Leakage Current					0.25	mA
<b>ENVIRONMENTAL SPECIFICATIONS</b>						
Operating Temperature	With derating (see derating curve)		-40		+70	°C
Storage Temperature			-40		+85	°C
Humidity					95	% RH
Cooling			Free air convection			
MTBF	25°C (MIL-HDBK-217F)		350,000			hours
<b>PHYSICAL SPECIFICATIONS</b>						
Weight			1.6oz (45g)			
Case Material			Plastic resin with fiberglass (Flammability to UL 94V-0)			
Dimensions (L x W x H)			1.48 x 1.10 x 1.08 inches (37.5 x 28.0 x 27.4 mm)			
<b>SAFETY &amp; EMC</b>						
Safety Approvals			UL/cUL <sup>(2)</sup> , CE			
EMC	EMI (Conducted and Radiated Emissions)		EN 55022 Class B			
	EMS (Noise Immunity)		EN 55024			

**DERATING CURVES**

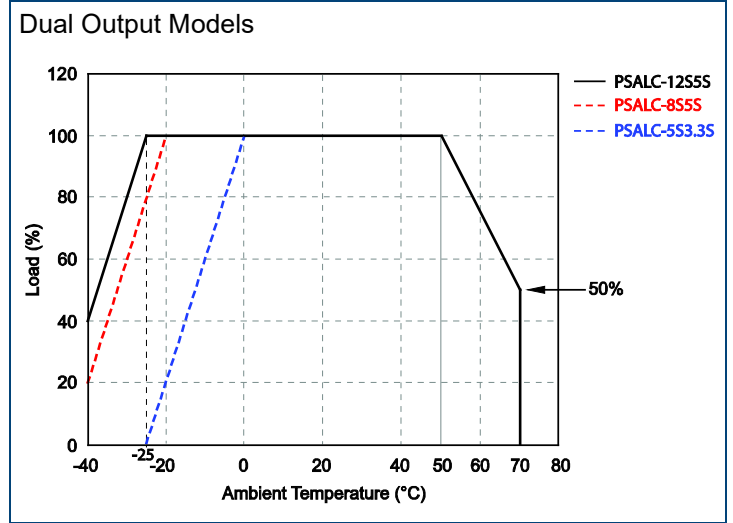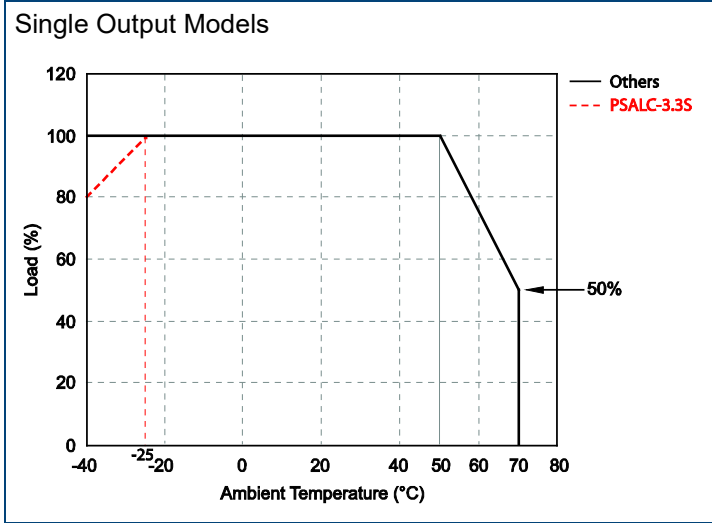

**MECHANICAL DRAWING**

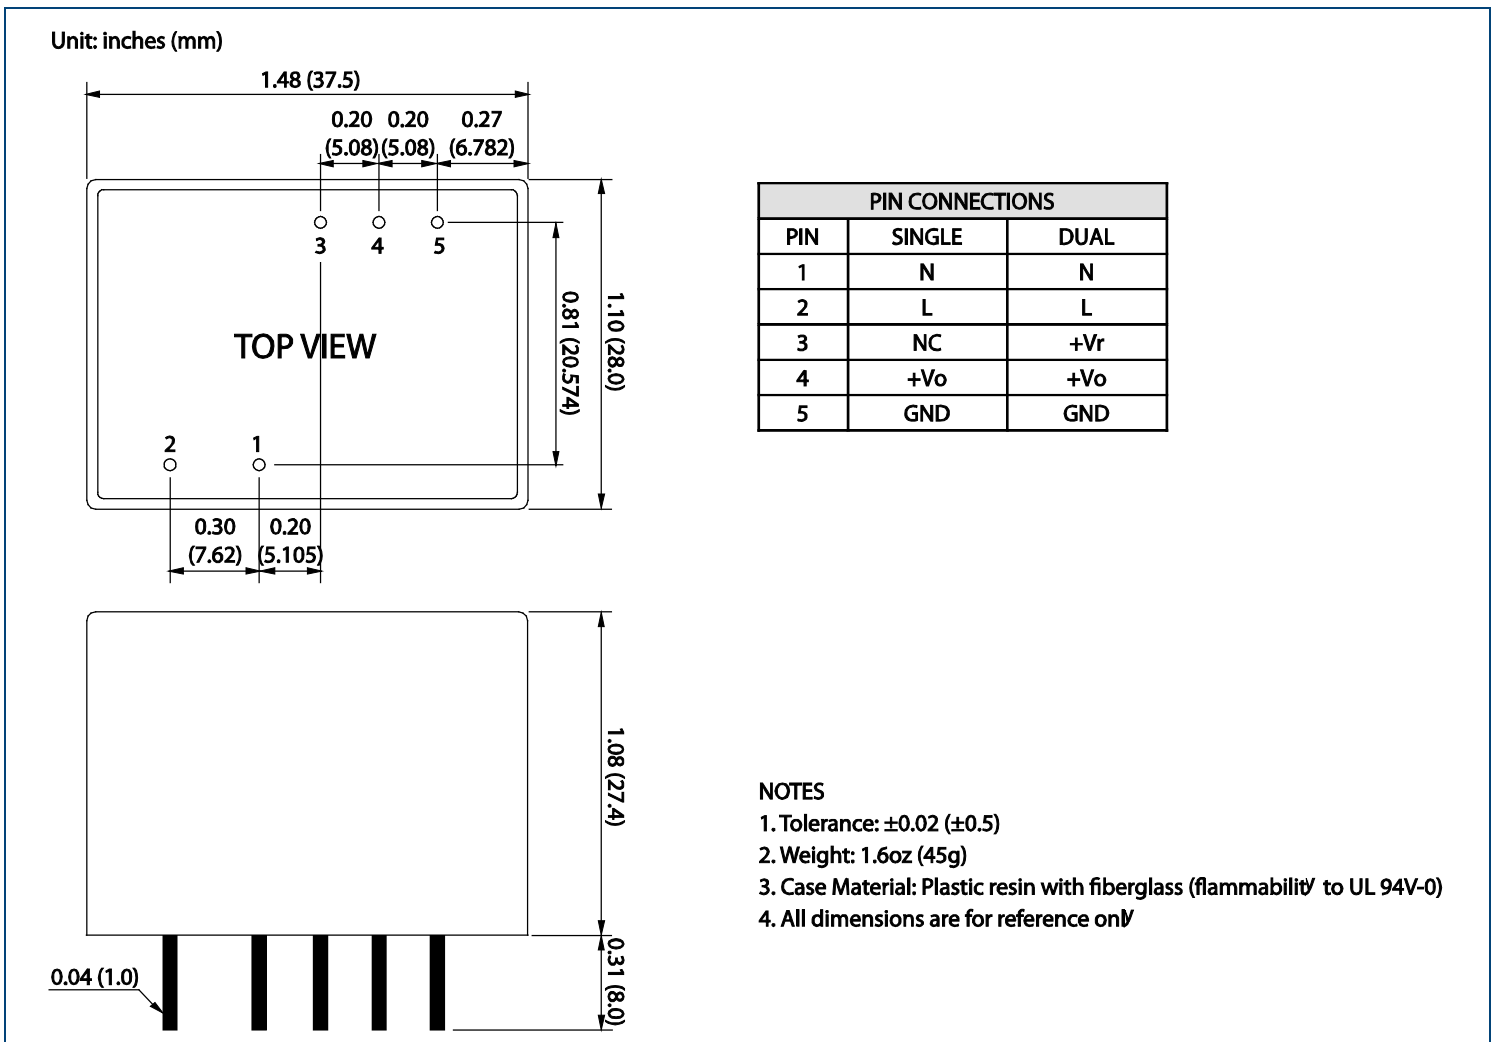

---

## COMPANY INFORMATION

---

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300  
Toll Free: ☎(888)597-9255  
Fax: ☎(603)778-9797  
E-mail: [sales@wallindustries.com](mailto:sales@wallindustries.com)  
Web: [www.wallindustries.com](http://www.wallindustries.com)  
Address: 37 Industrial Drive  
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.