

Wall Industries, Inc.

PSRL0402D SERIES

90~264VAC Input Voltage Range
200W Convection Cooling, 400W with Forced Air
Dual Outputs, Active PFC
AC/DC Switching Power Supplies



FEATURES

- Dual Outputs
- RoHS Compliant
- High Quality & Reliable Component Usage
- Variable Fan Speed & Low Acoustical Noise
- 90~264VAC Input Voltage Range
- MTBF: 100,000 Hours (MIL-HDBK-217F)
- Active Power Factor Corrected to EN61000-3-2 Class D
- U-Chassis and Enclosed with Built-in Fan Mechanical Options
- Short Circuit, Input Circuit, Over Power, Input Voltage, Over Voltage, and Over Temperature Protection
- Remote ON/OFF and Remote Sense Functions
- UL60950-1, EN60950-1, IEC60950-1 Safety Approvals

DESCRIPTION

The PSRL0402D series of AC/DC switching power supplies offers up to 400 Watts of output power. This series consists of dual output models with active PFC and a 90~264VAC input voltage range. These supplies also have short circuit, input voltage, over voltage, over power, and over temperature protection. Models are available in U-Chassis (Type U) and enclosed with built-in fan (Type E) designs. This series has UL60950-1, EN60950-1, and IEC60950-1 safety approvals. For single output models see the PSRL0402 series and for medical version see the PSRL0402M and PSRL0402DM series.

SPECIFICATIONS: PSRL0402D SERIES		
All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances.		
INPUT SPECIFICATIONS		
Input Voltage	90 ~ 264VAC full range	
Input Frequency	47 to 63Hz	
Input Current	6.35A at 90VAC full load	
Inrush Current	35A max at 230VAC with full load and cold start	
Power Factor Correction	0.98 at 230VAC and full load	
OUTPUT SPECIFICATIONS		
Output Voltage	See Table	
Output Power (<i>See Note 2</i>)	See Table	
Output Adjustability	Output adjustable $\pm 5\%$ minimum	
Total Regulation	$\pm 5\%$	
Output Current	See Table	
Minimum Load	10% minimum load is required to maintain the ripple and regulation	
Ripple & Noise	$\pm 1\%$	
Transient Response	Returns to within 1% in less than 2.5ms for a 50% load change and the peak transient does not exceed 5%	
Overshoot	Turn-on/off not exceed 5% over nominal voltage	
Hold-Up Time	20ms min. at 80% of full load	
Turn-on Delay	1 second maximum at 120VAC	
PROTECTION		
Input Circuit Protection (primary)	Two T8A/250V fuses inserted	
Over Power Protection	110~140% of I-max and automatic recovery	
Input Voltage Protection	Power shutdown under 80 ± 5 VAC and recovered over 86VAC	
Over Voltage Protection	Latching down will occur when output voltage exceeds 130%. Recycle AC input to reset	
Short Circuit Protection	Trip without damage and automatic recovery	
Over Temperature Protection	Protected in the event of excessive operating ambient 85°C and automatic recovery	
GENERAL SPECIFICATIONS		
Switching Frequency	30KHz fixed frequency	
Efficiency	75%~85% depending on model	
HI-POT test	Input Line to Chassis	1500VAC (2mA DC cut off current) for 3 seconds
	Primary to Secondary	4000VAC for 3 seconds
	Primary to Core	1500VAC for 3 seconds
Burn-in	45 \pm 5°C for one hour at 230VAC with full load.	
Leakage Current	< 1.5mA	
Grounding Test	Apply 40A from ground pin to the earthed connection point. Max allowable resistance is 0.1 Ω	
ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature	0°C to +70°C ambient, de-rating at 2.5% per degree from +50°C to +70°C.	
Storage Temperature	-20°C to +85°C	
Operating Humidity (non-condensing)	5% to 90% RH	
Storage Humidity (non-condensing)	5% to 95% RH	
Vibration	Frequency 5 to 50Hz, acceleration ± 7.35 m/(s x s) on X, Y, and Z axis.	
Cooling	U Type Models	Convection
	E Type Models	Fan
MTBF	100,000 hours at 30°C according to MIL-HDBK-217F	
FUNCTIONS		
Remote Sense	Designated as RS+ and RS- on the CN3	
Remote ON/OFF	Designated as RSW on the CN3, requires a low signal to inhibit output.	
Power Supply ON	Green LED designated as LED 1 on the PCB	
LED Display	Bi-color green LED in front panel (<i>E Type only</i>). Any protection occurred or RSW applied low signal will emit orange	
Power Good	Designated as PG on the CN3 will go high 100-500ms after regulation and goes low 1ms before loss of regulation	
Fan Drive	12VDC/400mA is available to drive an external fan.	
PHYSICAL SPECIFICATIONS		
Weight	U Type Models	2.87 lbs (1.3kg)
	E Type Models	3.53 lbs (1.6kg)
Dimensions (L x W x H)	U Type Models	8 x 5 x 1.6 inches (203.2 x 127 x 40.64 mm)
	E Type Models	9 x 5 x 1.6 inches (228.6 x 127 x 40.64 mm)
SAFETY & EMC		
Safety Approvals	UL60950-1 ⁽⁴⁾ , EN60950-1, IEC60950-1	
EMI Conduction & Radiation	EN55022 Class B	
Harmonic Current	EN61000-3-2, EN61000-3-3	
EMS Immunity	EN55024, IEC61000-4-2,3, 4, 5, 6, 8, 11	

MODEL SELECTION TABLES

U-CHASSIS MODELS (TYPE "U")							
Model Number		Input Voltage Range	Output Voltage	Max. Output Current		Max. Output Power	
				Convection	22.95CFM	Convection	22.95CFM
PSRL0402DU-0312	V1	90 ~ 264 VAC	+3.3 VDC	30 A	40 A	200W	300W
	V2		+12 VDC	16.7 A	25 A		
PSRL0402DU-0324	V1		+3.3 VDC	30A	40 A	200W	300W
	V2		+24 VDC	8.34 A	12.5 A		
PSRL0402DU-0512	V1		+5 VDC	30 A	40 A	200W	300W
	V2		+12 VDC	16.7 A	25 A		
PSRL0402DU-0524	V1		+5 VDC	30 A	40 A	200W	300W
	V2		+24 VDC	8.34 A	12.5 A		
PSRL0402DU-1224	V1		+12 VDC	16.7 A	25 A	250W	400W
	V2		+24 VDC	8.33 A	12.5 A		


ENCLOSED WITH BUILT-IN FAN MODELS (TYPE "E")					
Model Number		Input Voltage Range	Output Voltage	Max. Output Current	Max. Output Power
PSRL0402DE-0312	V1	90 ~ 264 VAC	+3.3 VDC	40 A	300W
	V2		+12 VDC	25 A	
PSRL0402DE-0324	V1		+3.3 VDC	40 A	300W
	V2		+24 VDC	12.5 A	
PSRL0402DE-0512	V1		+5 VDC	40 A	300W
	V2		+12 VDC	25 A	
PSRL0402DE-0524	V1		+5 VDC	40 A	300W
	V2		+24 VDC	12.5 A	
PSRL0402DE-1224	V1		+12 VDC	25 A	400W
	V2		+24 VDC	12.5 A	

NOTES

1. Optional top cover (Type "C") is also available for U-Chassis Models. Please call factory for more details.
2. 10% minimum load is required to maintain the ripple and regulation specifications.
3. For single output models see the PSRL0402M series.
4. This product is Listed to applicable standards and requirements by UL.


**Due to advances in technology, specifications subject to change without notice.*

DERATING CURVE

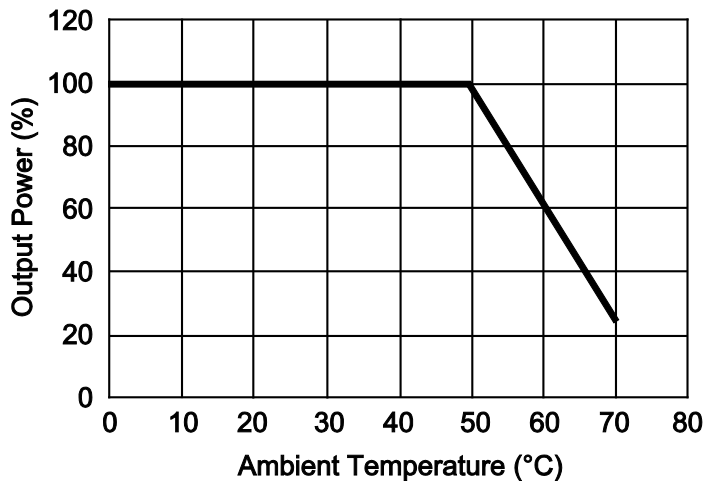


MECHANICAL DRAWING

U-Chassis Models (Type “U”): 8(L) x 5(W) x 1.6(H) inches; Weight: 2.87 lbs

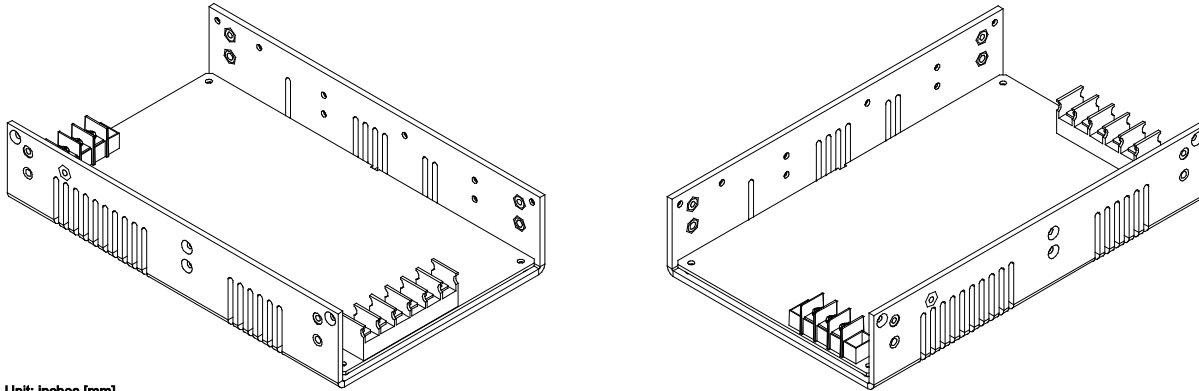

Unit: inches [mm]

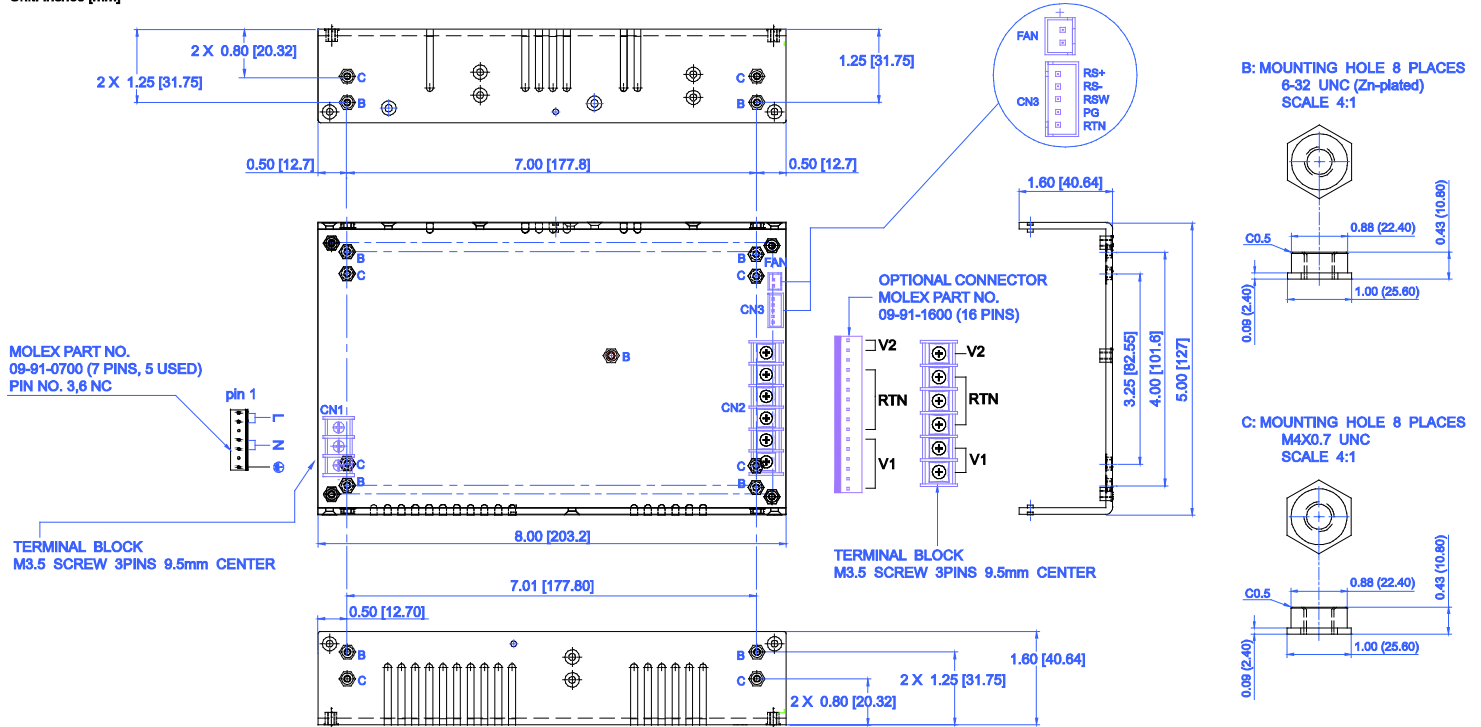

I/O CONNECTOR PIN ASSIGNMENTS:

Input Connector (CN1):

PSRL0402MU (U-Chassis Type): Mating Molex Part No. 09-91-0700 (7pin, 5 used) or Howder Terminal block (HD-121-3P)
PSRL0402ME (Enclosed with Built-in Fan Type): IEC320 or equivalent Snap-in mounting type or DINKLE Terminal block (DT-35-A02W-03)

Output Connector (CN2):

Mating Molex 16 pins (09-91-1600) or Howder (HD-121-6P) M3.5, 8 pins terminal block, 9.5 mm center

Logic Signal Connectors (CN3):

Mating JST XHP-9 or equivalent (CHYAO SHIUNN JS-2001-05) Mating Pins: JST SXH-002T-P0.6 for AWG 30 to 26


Mounting Inserts:

6-32, M4 4 places individually with maximum penetration 0.15" on bottom side and 0.25" on both sides


	Molex	Howder
V1	Pins 1-6	Pins 1-2
V2	Pins 14-16	Pin 6
RTN	Pins 7-13	Pins 3-5

MECHANICAL DRAWING

Enclosed with Built-in Fan Models (Type "E"): 9(L) x 5(W) x 1.6(H) inches; Weight: 3.53 lbs

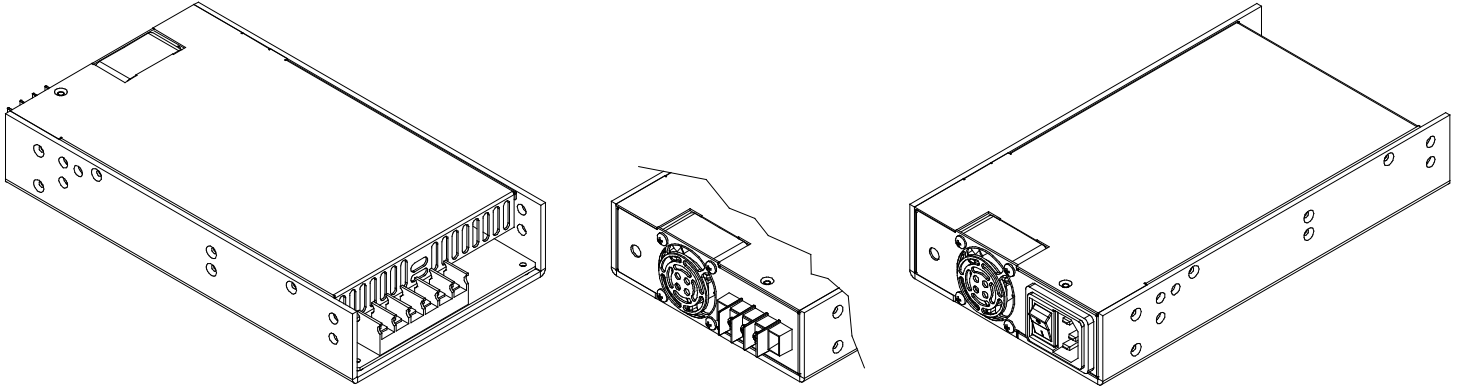

Unit: inches [mm]

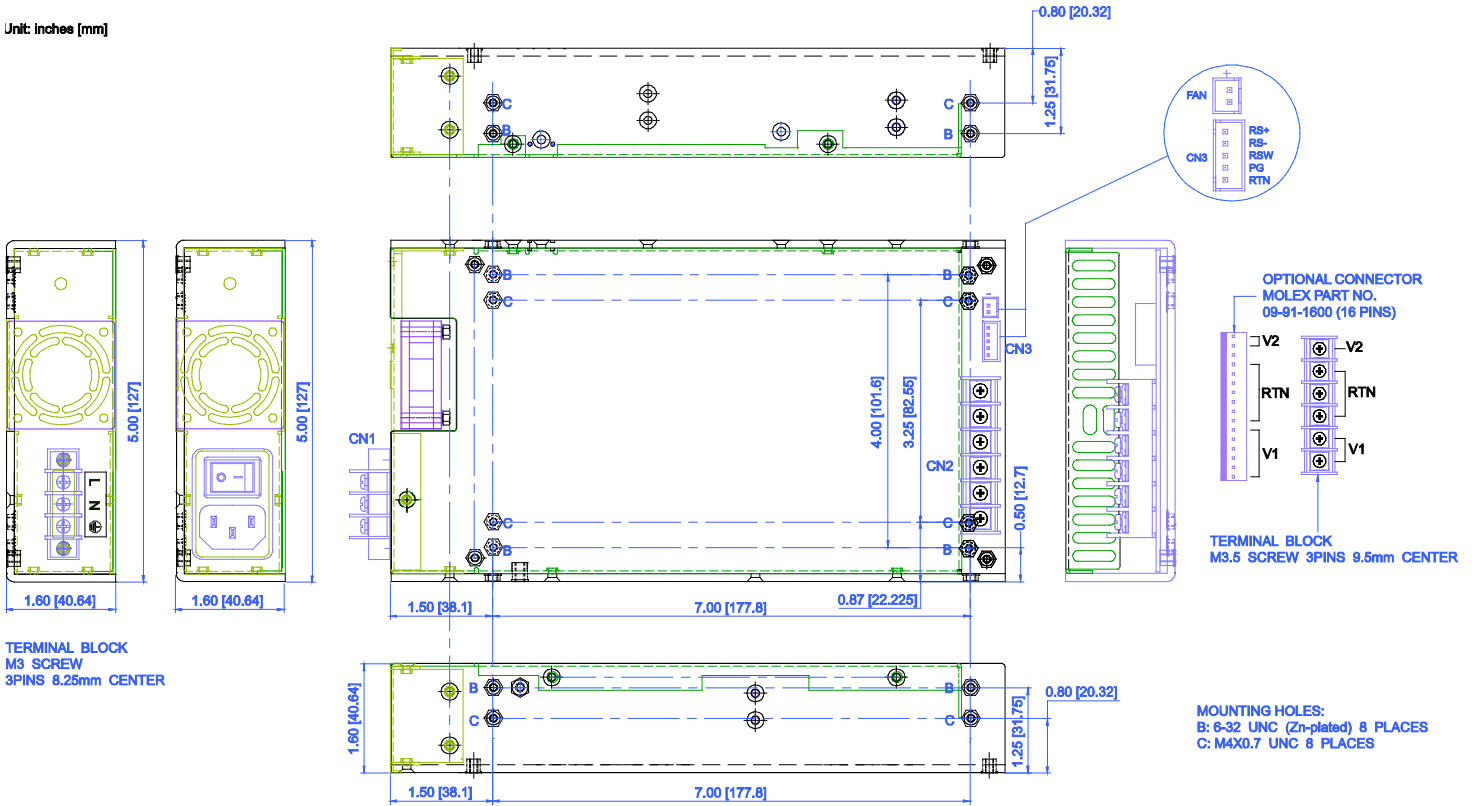

I/O CONNECTOR PIN ASSIGNMENTS:

Input Connector (CN1):

PSRL0402DU (U-Chassis Type): Mating Molex Part No. 09-91-0700 (7pin, 5 used) or Howder Terminal block (HD-121-3P)
PSRL0402DE (Enclosed with Built-in Fan Type): IEC320 or equivalent Snap-in mounting type or DINKLE Terminal block (DT-35-A02W-03)

Output Connector (CN2):

Mating Molex 16 pins (09-91-1600) or Howder (HD-121-6P) M3.5, 8 pins terminal block, 9.5 mm center

Logic Signal Connectors (CN3):

Mating JST XHP-9 or equivalent (CHYAO SHIUNN JS-2001-05) Mating Pins: JST SXH-002T-P0.6 for AWG 30 to 26

Mounting Inserts:

6-32, M4 4 places individually with maximum penetration 0.15" on bottom side and 0.25" on both sides

	Molex	Howder
V1	Pins 1-6	Pins 1-2
V2	Pins 14-16	Pin 6
RTN	Pins 7-13	Pins 3-5

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.