



Size: 9.2in x 4.3in x 2.5in

FEATURES

- Optional Top Cover Available
- Universal AC Input/Full Range
- Optional N+1 Active Current Sharing
- Peak Power 900W within 500µS duty duration
- Power Factor Corrected to EN61000-3-2 Class D
- High Power Density (Max. 9.1 Watts per cubic inch)
- Approved to UL/CUL/TUV/CB/CE & Class B Emissions
- Enclosed with Built-in Fan Mechanical Options

DESCRIPTION

The PSRL5017R6 series of AC DC power supplies provides up to 500W of output power. All models have a single output and a universal input voltage range. Models are available as enclosed with built-in Fan (Type E). Output connectors are Howder terminal block design. Optional Mating Molex outputs are also available. Please contact factory for ordering details.

MODEL SELECTION TABLE

Model Number	Output Voltage Range	Output Current	Ripple & Noise	Preset Voltage	Output Power	Regulation
PSRL5017Rx6-03(I)	2-3.3VDC	90A	75mV	3.3VDC	297W	±1%
PSRL5017Rx6-05(I)	5-6VDC	90A	75mV	5VDC	450W	±1%
PSRL5017Rx6-12(I)	12-15VDC	50A	±1%	12VDC	600W	±1%
PSRL5017Rx6-16(I)	16-21VDC	37.5A	±1%	18VDC	600W	±1%
PSRL5017Rx6-24(I)	22-30VDC	27.27A	±1%	24VDC	600W	±1%
PSRL5017Rx6-36(I)	31-47VDC	19.35A	±1%	36VDC	600W	±1%
PSRL5017Rx6-48(I)	48-56VDC	12.5A	±1%	48VDC	600W	±1%

SPECIFICATIONS: PSRL5017R6

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
 We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
INPUT SPECIFICATIONS					
Input Voltage Range	Full Range (PSRL5017Rx8 800W Series: 180-264VAC only)	90		264	VAC
Input Frequency		47		63	Hz
Inrush Current	@230VAC with Full Load Cold Start			70	A
Leakage Current	@240VAC			3.5	mA
Input Current	@90VAC and Full Load		10		A
Remote ON/OFF	Designated as RSW on CN3, requires a low signal to inhibit output				
OUTPUT SPECIFICATIONS					
Output Voltage				See Table	
Output Power Range	With Airflow.			600	W
Output Adjustability	Output user adjustable	±5			%
Total Regulation			±1		%
Output Current				See Table	
Ripple and Noise (peak to peak)				See Table	
Transient Response	Returns to within 1% in less than 2.5ms for a 50% load change and the peak transient does not exceed 5%				
Hold-Up Time	@80% of Full Load.	20			ms
Overshoot	Turn-On & Off overshoot <5% over normal voltage				
Turn On Delay	@120VAC			1	Sec.
Remote Sense	Designated as RS+ and RS- on CN3. Voltage compensates for up to 0.5V line drop. (Not available for current sharing models)				
PROTECTION					
Short Circuit Protection	Trip without damage and auto-recovery.				
Over-Temperature Protection	Unit protected of excessive operating ambient 85°C and automatic recovery.				
Over Voltage Protection	Unit latching down when output voltage exceeds 130% and recycle AC input to reset.				
Over-Power Protection	Fold back mode 110-140% and auto-recovery.				
Input Voltage Protection	Power shut down under 80 ±5VAC, and recovered over 86VAC				
Input Fusing Protection	A T10A/250V fuse inserted in primary				
ENVIRONMENTAL SPECIFICATIONS					
Operating Temperature	Ambient, De-Rating at 2.5% per degree from 50°C to 70°C	0		+70	°C
Storage Temperature		-20		85	°C
Operating Humidity	Non-Condensing	5		90	% RH
Storage Humidity	Non-Condensing	5		95	% RH
Vibration	Acceleration 7.35 m/(s x s) on X,Y, and Z axis	5		50	Hz
Cooling	Self-cooled by built-in fan.				
MTBF	(according to MIL-HBK-217F) @30°C		150,000		Hr
GENERAL SPECIFICATIONS					
Efficiency	@230VAC and Full Load	3.3V		70	%
		5V		75	
		12V		80	
		All other Outputs	83		
Withstand Voltage	1500 VAC input line to chassis (10mA DC cut off current); 3000VAC between primary and secondary windings. Primary to core 1500VAC. All for 3 seconds.				
Burn-In	For one hour @ 230VAC with Full Load	40	45	50	°C
PFC	Active power factor correction meets EN61000-3-2 Class D				
Power Good	Designated as PG on the CN3 and TTL high 100-500ms after regulation. It goes low at least 1ms before loss of regulation for Power on Reset signal.				
Grounding Test	Apply 25A from ground pin of the three prong plug to the far most earth. Max allowable resistance is 0.1 ohm.				
Current Sharing	Designated as CSH on the CN3, optional single wired for forced current sharing function and parallel up to 4 units within 10% accuracy at full load.				
Current Monitor	Designated as CMN on the CN3 is a 0.5V to 3VDC output voltage to represent 0% to 100% output current.				
LED Display	Bi-Color LED1 emit Green for Power On and emit Orange when protection is enabled or RSW is applied to a low signal				

SPECIFICATIONS

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
We reserve the right to change specifications based on technological advances.


SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
PHYSICAL SPECIFICATIONS					
Weight				1450 grams	
Dimensions (L x W x H)				9.2in x 4.3in 2.5in	
SAFETY & EMC CHARACTERISTICS					
Safety Regulations	UL60950-1 CSA C22.2 No. 60950-1-03 TUV EN60950-1 CE Mark (LVD) EN61000-3-2-3 IEC61000-4 Series Regulations and CB				
Emissions	FCC part15, CISPR 22 Class B, Conducted				

NOTES

- (1) The PSRL5017R6 Series is designated as PSRL5017Rxw-yz where x=**E** (Enclosed with built-in fan type), w=**6** for output power from 264W-500W, y= **03,05,12,16,36**, or **48** for output voltage, and z can be **blank** or **I** where **I** denotes forced current sharing option (output with internal OR-ring diode). See PSRL5017R-I Series for forced current sharing.
- (2) All output ranges are covered in agency certifications and preset voltage will be set as standard models. If any request is not preset output, then please contact us in advance.
- (3) Ripple & Noise are measured from 10KHZ to 20 MHz bandwidth at output with parallel 0.1µF ceramic and 22µF electrolytic capacitors.
- (4) Providing peak power to 900W within 500µS for all models, longer duty duration need contact with manufacturer.
- (5) 1% minimum load is required to maintain the ripple and regulation.
- (6) Output is fully isolated.

MECHANICAL DRAWINGS

Enclosed with Built-In Fan Type

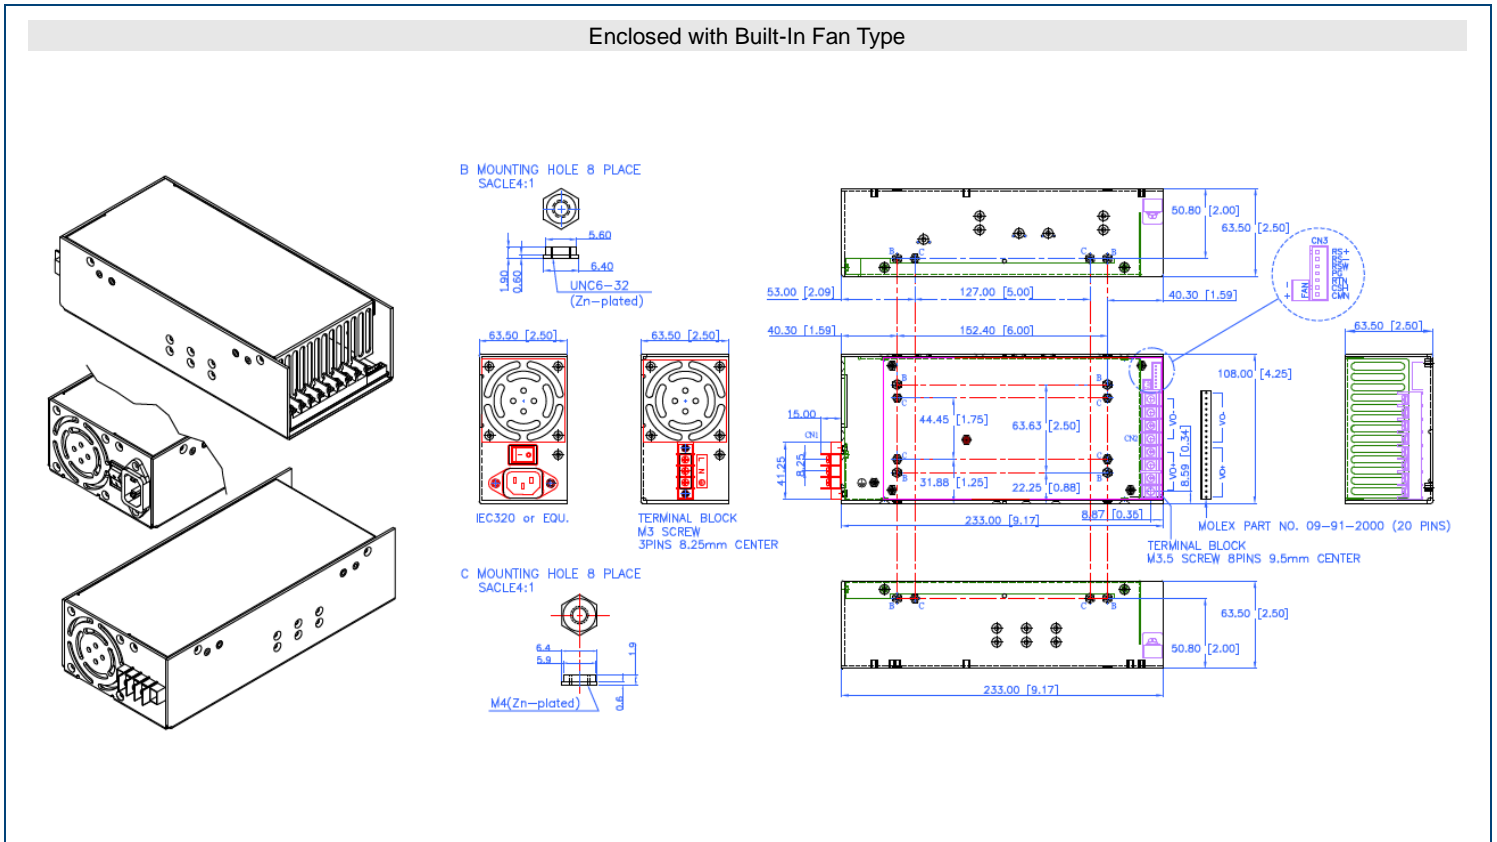

I/O Connector Pin Assignment

AC Input Connector (CN1):

IEC320 or equivalent Snap-in mounting type or DINKLE Terminal Block Part No. DT-35-A02W-03 (3 pin)

Output Connector (CN2):

Mating Molex Part No. 09-91-2000 (20 Pin) or Howder Terminal Block Part No. HD-121-8P (8 pin)

Output Pin Assignment:

Output Pin Connection		
	Howder	Molex
Vo+	Pins 1-4	Pins 1-10
Vo-	Pins 5-8	Pins 11-20

Logic Signal Connectors (CN3):

Mating JST XHP-7 or equivalent (CHYAO SHIUNN JS-2001-07).

Fan Drive:

12VDC/500mA Mating JST XHP-2 or equivalent (CHYAO SHIUNN JS-2001-02)

Mounting Inserts:

6-32, M4 4 Places individually with maximum penetration 0.2 inch on bottom side and 0.25 inch on both sides.

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833