

Wall Industries, Inc.

WMIPEM1036 SERIES

15~36 Watts
100-240VAC Input Voltage Range
US, EU, UK, and AUS Interchangeable Plugs Available
Medical AC/DC Wall Mount Power Supplies



FEATURES

- 100-240VAC Input Voltage Range
- 15~36 Watts Output Power
- Single Outputs
- Short Circuit and Over Voltage Protection
- MTBF: > 30,000 Hours
- Optional Output Connectors
- CEC & RoHS Compliance
- High Operating Temperature up to + 50°C
- UL60601-1 Medical Approvals
- US, EU, UK, and AUS Interchangeable Plugs Available

DESCRIPTION

The WMIPEM1036 series of wall mount AC/DC power supplies offers up to 36 Watts of output power in a 3.88" x 1.79" x 1.29" package. This series consists of single output models ranging from 9 to 15VDC with an input voltage range of 100~240VAC. These supplies are also protected against over voltage and short circuit conditions. This series is CEC and RoHS compliant and has UL60601-1 medical approvals. Plugs come in United States (US), Europe (EU), Australia (AUS), and United Kingdom (UK) types. Plugs are sold separately so please contact factory for ordering details. Optional output connectors are also available.

SPECIFICATIONS: WMIPEM1036 SERIES					
All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted. We reserve the right to change specifications based on technological advances.					
SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
INPUT					
Input Voltage		100	115/230	240	VAC
Input Frequency		50		60	Hz
Input Current				1.0	A
Inrush Current				60	A
OUTPUT					
Output Voltage		See Table			
Line Regulation	Defined by changing ±10% of input voltage from nominal line at rated load	-1		+1	%
Load Regulation		-5		+5	%
Output Power		See Table			
Output Current		See Table			
Minimum Load		0			%
Ripple & Noise	Measured at 20MHz BW with 0.1µF ceramic and 47µF aluminum capacitors in parallel with the output at full load and nominal line		240		mVp-p
Hold-Up Time		8.3			ms
Turn-on Time				3	s
PROTECTION					
Short Circuit Protection		Auto-recovery			
Over Voltage Protection		Auto-recovery			
GENERAL					
Efficiency			82		%
ENVIRONMENTAL					
Operating Temperature		0		+50	°C
Storage Temperature		-20		+85	°C
Storage Humidity		5		95	%
Cooling		Free air convection			
MTBF		30,000			hours
PHYSICAL					
Weight		7.76oz (220g)			
Dimensions (L x W x H)		3.88" x 1.79" x 1.29" (98.5 x 45.5 x 32.8 mm)			
Interchangeable AC Plugs		US, UK, EU, and AUS types			
Connector Type		optional output connectors available			
SAFETY & COMPLIANCE					
Safety Approvals		UL60601-1 ⁽³⁾			
Compliance		CEC and RoHS			

MODEL SELECTION TABLE

Model Number	Input Voltage Range	Output Voltage ⁽¹⁾	Output Current	Output Power	Ripple & Noise	AC Plug
WMIPEM1036AU	100~240 VAC	9 ~ 15 VDC	3A	36W	240mVp-p	US
WMIPEM1036BU		9 ~ 15 VDC	2.5A	30W	240mVp-p	US
WMIPEM1036CU		9 ~ 15 VDC	2A	24W	240mVp-p	US
WMIPEM1036DU		9 ~ 15 VDC	1.5A	18W	240mVp-p	US
WMIPEM1036EU		9 ~ 15 VDC	1A	15W	240mVp-p	US
WMIPEM1036AE	100~240 VAC	9 ~ 15 VDC	3A	36W	240mVp-p	EU
WMIPEM1036BE		9 ~ 15 VDC	2.5A	30W	240mVp-p	EU
WMIPEM1036CE		9 ~ 15 VDC	2A	24W	240mVp-p	EU
WMIPEM1036DE		9 ~ 15 VDC	1.5A	18W	240mVp-p	EU
WMIPEM1036EE		9 ~ 15 VDC	1A	15W	240mVp-p	EU
WMIPEM1036AK	100~240 VAC	9 ~ 15 VDC	3A	36W	240mVp-p	UK
WMIPEM1036BK		9 ~ 15 VDC	2.5A	30W	240mVp-p	UK
WMIPEM1036CK		9 ~ 15 VDC	2A	24W	240mVp-p	UK
WMIPEM1036DK		9 ~ 15 VDC	1.5A	18W	240mVp-p	UK
WMIPEM1036EK		9 ~ 15 VDC	1A	15W	240mVp-p	UK
WMIPEM1036AA	100~240 VAC	9 ~ 15 VDC	3A	36W	240mVp-p	AUS
WMIPEM1036BA		9 ~ 15 VDC	2.5A	30W	240mVp-p	AUS
WMIPEM1036CA		9 ~ 15 VDC	2A	24W	240mVp-p	AUS
WMIPEM1036DA		9 ~ 15 VDC	1.5A	18W	240mVp-p	AUS
WMIPEM1036EA		9 ~ 15 VDC	1A	15W	240mVp-p	AUS

NOTES

1. The output voltage is specified as a range (Ex: 9~15VDC); the customer must specify what they want the voltage set at.
2. Optional output connectors are available. Please call factory for more details.
3. This product is Listed to applicable standards and requirements by UL.

**Due to advances in technology, specifications subject to change without notice.*

MODEL NUMBER SETUP

WMIPEM1036

Series Designation

X

Output Current	
Options	
A	3A
B	2.5A
C	2A
D	1.5A
E	1A

Z

AC Plug Type	
Options	
U	US Type
E	EU Type
K	UK Type
A	AUS Type

-

VV


Specified Output Voltage
(Ex: 12 is 12VDC)

PP


Output Connector

MECHANICAL DRAWING

Unit: inches (mm)

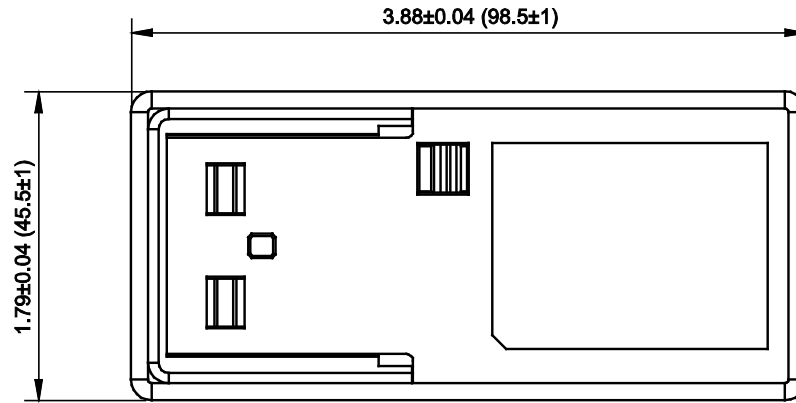


H: 1.29±0.04 (32.8±1)




H: 1.10±0.04 (28±1)

EU Type




H: 0.75±0.04 (19±1)

AUS Type



H: 0.40±0.04 (10.2±1)

US Type



H: 0.40±0.04 (10.2±1)

UK Type

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
 Toll Free: ☎ (888)597-9255
 Fax: ☎ (603)778-9797
 E-mail: sales@wallindustries.com
 Web: www.wallindustries.com
 Address: 37 Industrial Drive
 Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.