



SMD Package

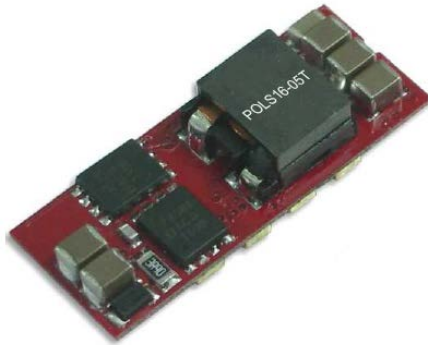


Size: 1.30in x 0.53in x 0.30in

Vertical SIP Package

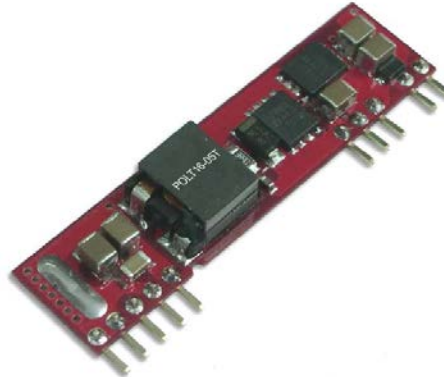

Size: 2.00in x 0.50in x 0.28in

Horizontal SIP Package

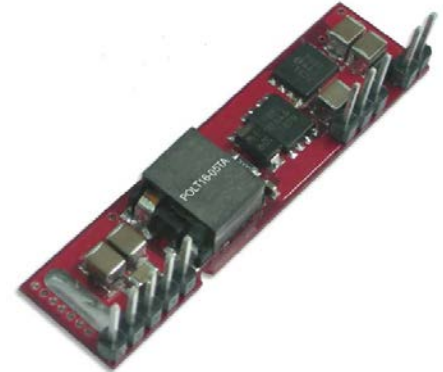

Size: 2.00in x 0.50in x 0.28in

OPTIONS

- SMD or SIP Package Type
- Vertical or Horizontal Mounting for SIP Package
- Remote Control Positive or Negative Logic

FEATURES

- High Efficiency of 95%
- Small Size and Low Profile
- SMD or SIP Package
- SMD Package Qualified for Lead Free Reflow Solder Process According IPC-STD-020D
- Remote Control
- CE Marked
- Compliant to RoHS II & REACH
- Over Load, Short Circuit, and Over Temperature Protection
- UL60950-1, EN60950-1, and IEC60950-1 Safety Approvals

APPLICATIONS

- Wireless Network
- Telecom/Datacom
- Industry Control System
- Distributed Power Architectures
- Semiconductor Equipment
- Microprocessor Power Applications

DESCRIPTION

The POL16-05T series of DC/DC open frame power converters offers 16A output current rating in a compact and low profile package. This series consists of single output models with an input voltage range of 2.4~5.5VDC. Several options are available such as SMD or SIP package and remote control positive or negative logic. Each model in this series is CE marked, compliant to RoHS II & REACH, and has over load, short circuit, and over temperature protection. This series has UL60950-1, EN60950-1, and IEC6095-1 safety approvals. Please call factory for order details.

MODEL SELECTION TABLE

Model Number	Input Voltage Range	Output Voltage	Output Current @Full Load	No Load Input Current 0.75VDC/3.3VDC	Package Type	Maximum Capacitive Load ⁽¹⁾	Efficiency ⁽²⁾	Remote ON/OFF
POLS16-05T	2.4~5.5VDC	0.75~3.3VDC	16A	100/130mA	SMD	100/5000µF	95%	Negative
POLS16-05T-P								Positive
POLT16-05T	2.4~5.5VDC	0.75~3.3VDC	16A	100/130mA	Vertical SIP	100/5000µF	95%	Negative
POLT16-05T-P								Positive
POLT16-05TA	2.4~5.5VDC	0.75~3.3VDC	16A	100/130mA	Horizontal SIP	100/5000µF	95%	Negative
POLT16-05TA-P								Positive


SPECIFICATIONS

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
 We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
INPUT SPECIFICATIONS					
Input Voltage Range	$V_{out(set)} < V_{in} - 0.5VDC$	2.4	5	5.5	VDC
Maximum Input Current	$V_{in} = 2.4$ to 5.5VDC, $I_o = I_o(max)$		16		A
Input Reflected Ripple Current	5~20MHz, 1 μ H source impedance		100		mAp-p
Start-Up Voltage			2.2		VDC
Shutdown Voltage			2.0		VDC
Input Filter ⁽³⁾		Capacitor Type			
OUTPUT SPECIFICATIONS					
Output Voltage		See Table			
Voltage Accuracy	% of $V_{out(set)}$	-2.0		+2.0	%
Line Regulation	$V_{in} = V_{out(set)} + 0.5VDC$ to $V_{in(max)}$ at Full Load; % of $V_{out(set)}$	-0.3		+0.3	%
Load Regulation	No Load to Full Load; % of $V_{out(set)}$	-0.4		+0.4	%
Voltage Adjustability ⁽⁴⁾		0.7525		3.63	VDC
Remote Sense				0.5	VDC
Output Current		See Table			
Maximum Capacitive Load		See Table			
Ripple & Noise	Measured by 20MHz bandwidth, with a 1 μ F MLCC & a 10 μ F T/C		15		mVrms
			50		mVp-p
Dynamic Load Response	With a 1 μ F MLCC & a 10 μ F T/C $\Delta I_o / \Delta t = 2.5A/\mu s$, $V_{in(nom)}$ Peak Deviation 50% load step change Setting Time ($V_{out} < 10\%$ peak deviation)		300		mV
			25		μs
Dynamic Load Response	With 2pcs of 150 μ F polymer capacitors $\Delta I_o / \Delta t = 2.5A/\mu s$, $V_{in(nom)}$ Peak deviation 50% load step change Setting time ($V_{out} < 10\%$ peak deviation)		150		mV
			100		μs
Temperature Coefficient		-0.4		+0.4	%/°C
REMOTE ON/OFF CONTROL⁽⁵⁾⁽⁶⁾					
Negative Logic (Standard)	DC-DC ON	Open or 0~0.3VDC			
	DC-DC OFF	1.5VDC~ $V_{in(max)}$			
Positive Logic (Option)	DC-DC ON	Open or $V_{in(max)}$			
	DC-DC OFF	0~0.3VDC			
Input Current of CTRL Pin		0.01		1.0	mA
Remote OFF Input Current			1.5		mA
Turn-On Delay Time ⁽⁷⁾			1		ms
Rise Time	Time for V_{out} to rise from 10% to 90% of $V_{out(set)}$			6	ms
Output Voltage Overshoot-Startup	$V_{in} = 2.4$ ~5.5VDC at Full Load; % of $V_{out(set)}$		1.0		%
PROTECTION					
Short Circuit Protection		Continuous, Automatic Recovery			
Over Load Protection	% of I_{out} rated		180		%
Over Temperature Protection			125		°C
ENVIRONMENTAL SPECIFICATIONS					
Operating Case Temperature	With Derating	-40		+85	°C
Storage Temperature		-55		+125	°C
Relative Humidity	Non-Condensing	5		95	%RH
Thermal Shock		MIL-STD-810F			
Vibration		MIL-STD-810F			
MTBF	MIL-HDBK-217F, Full Load	3,238,000			Hours
GENERAL SPECIFICATIONS					
Efficiency		See Table			
Switching Frequency		270	300	330	kHz
PHYSICAL SPECIFICATIONS					
Weight		0.21 oz (6.0g)			
Dimensions (L x W x H)	SMD Package	1.30in x 0.53in x 0.30in (33.0mm x 13.5mm x 7.6mm)			
	SIP Package	2.00in x 0.50in x 0.28in (50.8mm x 12.7mm x 7.2mm)			
SAFETY CHARACTERISTICS					
Safety Approvals		UI60950-1, EN60950-1, IEC60950-1			
Lead-Free Reflow Solder Process		IPC J-STD-020D			
Moisture Sensitivity Level (MSL)		IPC J-STD-033B, Level 2a			

NOTES

1. Test by minimum input and constant resistive load. $ESR \geq 1m\Omega$ / $ESR \geq 10m\Omega$
2. $V_{in(nom)}$ 3.3VDC @ Full Load
3. It is necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external C_{in} is 4pcs of 150 μ F low-ESR polymer capacitors // 4pcs of 47 μ F ceramic capacitors at least.
4. Output voltage programmable from 0.75V to 3.3V by connecting a single resistor (shown as trim table) between the Trim and GND pins of the module. To calculate the value of the resistor R_{trim} for a particular output voltage V_{out} , use the following:

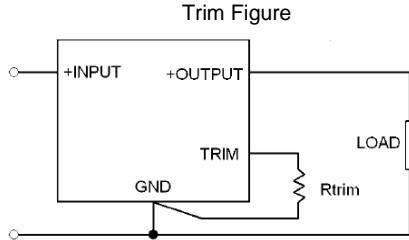

$V_{out(set)}$ (VDC)	R_{trim} (k Ω)
0.7525	Open
1.2	41.973
1.5	23.077
1.8	15.004
2.5	6.974
3.3	3.160


5. Remote ON/OFF referred to $-V_{in}$ pin
6. Positive Logic: ON/OFF is open collector/drain logic input
 Negative Logic: ON/OFF pin is open collector/drain logic input with external pull-up resistor
7. Case 1: ON/OFF input is set to logic low (module on) and then input power is applied (delay from instant at which $V_{in}=V_{in(min)}$) until $V_{out}=10\%$ of $V_{out(set)}$
 Case 2: Input power is applied for at least one second and then the ON/OFF input is set to logic low (delay from instant at which $V_{on/off}=0.3VDC$ until $V_{out}=10\%$ of $V_{out(set)}$)

CAUTION: This power module is not internally fused. AN input line fuse must always be used.


**Due to advances in technology, specifications subject to change without notice.*

CHARACTERISTIC CURVES


POLS16-05T, $V_{out}=3.3V$ Derating Curve

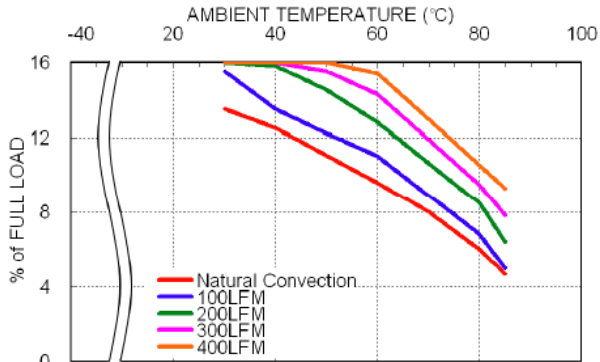

POLS16-05T, $V_{out}=3.3V$ Efficiency vs. Input Voltage

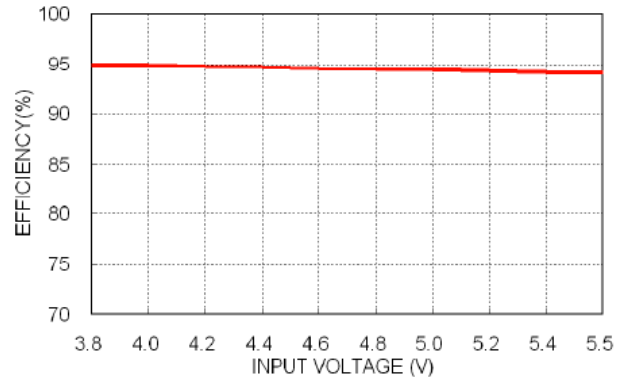

POLS16-05T, $V_{out}=3.3V$ Efficiency vs. Output Load

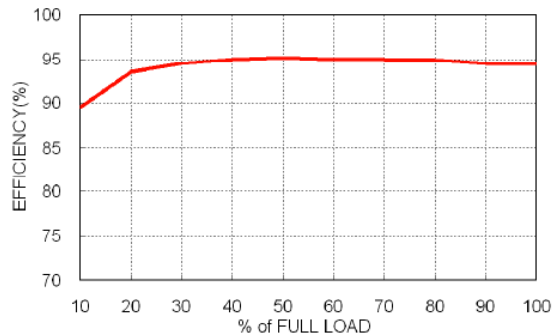

MECHANICAL DRAWINGS

POL16-05T		PIN CONNECTIONS																							
<p>0.53(13.5) 0.430(10.92) 1.30(33.0) 0.310(7.88) 0.570(14.48) 0.302(7.67) 0.190(4.83) 0.410(10.41) 0.07(1.82) 0.30(7.6) 0.06(1.6) 0.062X0.112(1.57X2.84) 0.04(1.1) BOTTOM VIEW</p>		<table border="1"> <thead> <tr> <th>PIN</th> <th>DEFINE</th> </tr> </thead> <tbody> <tr><td>1</td><td>Ctrl</td></tr> <tr><td>2</td><td>+Sense</td></tr> <tr><td>3</td><td>Trim</td></tr> <tr><td>4</td><td>+Vout</td></tr> <tr><td>5</td><td>GND</td></tr> <tr><td>6</td><td>+Vin</td></tr> </tbody> </table>		PIN	DEFINE	1	Ctrl	2	+Sense	3	Trim	4	+Vout	5	GND	6	+Vin								
PIN	DEFINE																								
1	Ctrl																								
2	+Sense																								
3	Trim																								
4	+Vout																								
5	GND																								
6	+Vin																								
POLT16-05T		PIN CONNECTIONS																							
<p>2.00(50.8) 0.50(12.7) 1.800(45.72) 1.400(35.56) 0.100(2.54) 0.05(1.3) 0.04(0.9) 0.28(7.2) 0.13(3.3) 0.025(0.64) BOTTOM VIEW</p>		<table border="1"> <thead> <tr> <th>PIN</th> <th>DEFINE</th> </tr> </thead> <tbody> <tr><td>1</td><td>+Vout</td></tr> <tr><td>2</td><td>+Vout</td></tr> <tr><td>3</td><td>+Sense</td></tr> <tr><td>4</td><td>+Vout</td></tr> <tr><td>5</td><td>GND</td></tr> <tr><td>6</td><td>GND</td></tr> <tr><td>7</td><td>+Vin</td></tr> <tr><td>8</td><td>+Vin</td></tr> <tr><td>10</td><td>Trim</td></tr> <tr><td>11</td><td>Ctrl</td></tr> </tbody> </table>		PIN	DEFINE	1	+Vout	2	+Vout	3	+Sense	4	+Vout	5	GND	6	GND	7	+Vin	8	+Vin	10	Trim	11	Ctrl
PIN	DEFINE																								
1	+Vout																								
2	+Vout																								
3	+Sense																								
4	+Vout																								
5	GND																								
6	GND																								
7	+Vin																								
8	+Vin																								
10	Trim																								
11	Ctrl																								
POLT16-05TA		PIN CONNECTIONS																							
<p>2.00(50.8) 0.50(12.7) 1.800(45.72) 1.400(35.56) 0.100(2.54) 0.05(1.3) 0.28(7.2) 0.16(4.1) 0.025(0.64) BOTTOM VIEW</p>		<table border="1"> <thead> <tr> <th>PIN</th> <th>DEFINE</th> </tr> </thead> <tbody> <tr><td>1</td><td>+Vout</td></tr> <tr><td>2</td><td>+Vout</td></tr> <tr><td>3</td><td>+Sense</td></tr> <tr><td>4</td><td>+Vout</td></tr> <tr><td>5</td><td>GND</td></tr> <tr><td>6</td><td>GND</td></tr> <tr><td>7</td><td>+Vin</td></tr> <tr><td>8</td><td>+Vin</td></tr> <tr><td>10</td><td>Trim</td></tr> <tr><td>11</td><td>Ctrl</td></tr> </tbody> </table>		PIN	DEFINE	1	+Vout	2	+Vout	3	+Sense	4	+Vout	5	GND	6	GND	7	+Vin	8	+Vin	10	Trim	11	Ctrl
PIN	DEFINE																								
1	+Vout																								
2	+Vout																								
3	+Sense																								
4	+Vout																								
5	GND																								
6	GND																								
7	+Vin																								
8	+Vin																								
10	Trim																								
11	Ctrl																								
<p>Notes: All dimensions in inch (mm) Tolerance: x.xx±0.02 (x.x±0.5) x.xxx±0.01 (x.xx±0.25) Pin Pitch Tolerance ±0.01 (0.25) Pin Dimension Tolerance ±0.004(0.1)</p>																									

MODEL NUMBER SETUP

POLT	16	-	05	T	-	P
Series Name	Output Current		Input Voltage	Output Quantity		Remote Control Option
POLS: SMD Type POLT: SIP Type			05: 2.4~5.5VDC	T: No Assembly (SMD Type) T: Vertical Mounting (SIP Type) TA: Horizontal Mounting (SIP Type)		None: Negative Logic P: Positive Logic

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001-2008 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
 Toll Free: ☎(888)597-9255
 Fax: ☎(603)778-9797
 E-mail: sales@wallindustries.com
 Web: www.wallindustries.com
 Address: 37 Industrial Drive
 Exeter, NH 03833