

Size: 0.72in x 0.58in x 0.28in (18.20mm x 14.80mm x 7.10mm)

FEATURES

- Single Channel
- Compact Size
- CAN Isolation Transceiver Module
- Two-Port Isolation: 3.0kVDC
- High Baud Rate Up to 1Mbps
- RoHS Compliant
- Bus Can Support Maximum 110 Nodes
- DIP8 Package
- Set Isolation and ESD Bus Protection In One
- EN60950 Safety Approval
- 3 Year Warranty

DESCRIPTION

The RBCAND21 series of CAN isolation transceiver module is a single channel, high speed, industrial bus that converts TTL/CMOS level to CAN bus differential level and uses IC integrated technology to achieve signal and power isolation. This series consists of very compact models with a DIP8 package and a bus that can support a maximum of 110 nodes. It features two-port isolation of 3.0kVDC, baud rate up to 1Mbps, as well as set isolation and ESD bus protection in one. This series is RoHS compliant and also has EN60950 safety approvals.

MODEL SELECTION TABLE

| Model Number | Input Voltage | Static Current | Max. Operating Current | Bus Maximum Voltage | Baud Rate | Number of Nodes | Certification |
|---------------|---------------|----------------|------------------------|---------------------|-----------|-----------------|---------------|
| RBCAND21-3100 | 3.3VDC | 29mA | 100mA | ±36VDC | 5k-1M | 110 | CE |
| RBCAND21-580 | 5VDC | 38mA | 80mA | ±36VDC | 5k-1M | 110 | |

SPECIFICATIONS

All specifications are based on 25°C, Humidity <75%, Nominal Input Voltage, and Rated Output Load unless otherwise noted. We reserve the right to change specifications based on technological advances.

| SPECIFICATION | TEST CONDITIONS | | Min | Typ | Max | Unit |
|------------------------------------|---|---------------------------|---------|-----|------|------|
| INPUT SPECIFICATIONS | | | | | | |
| Input Voltage | Symbol: VCC | RBCAND21-3100 Model | 3.15 | 3.3 | 3.45 | VDC |
| | | RBCAND21-580 Model | 4.75 | 5 | 5.25 | |
| Input Surge Voltage | 1 sec. max | RBCAND21-3100 Model | -0.7 | | 5 | VDC |
| | | RBCAND21-580 Model | -0.7 | | 7 | |
| TXD Logic Level (High Level) | Symbol: V _{IH} | RBCAND21-3100 Model | 0.7VCC | | 3.6 | VDC |
| | | RBCAND21-580 Model | 0.7VCC | | 5.5 | |
| TXD Logic Level (Low Level) | Symbol: V _{IL} | RBCAND21-3100 Model | 0 | | 0.8 | VDC |
| | | RBCAND21-580 Model | 0 | | 0.8 | |
| RXD Logic Level (High Level) | Symbol: V _{OH} | RBCAND21-3100 Model | VCC-0.4 | 3.1 | | VDC |
| | | RBCAND21-580 Model | VCC-0.4 | 4.8 | | |
| RXD Logic Level (Low Level) | Symbol: V _{OL} | RBCAND21-3100 Model | | 0.2 | 0.4 | VDC |
| | | RBCAND21-580 Model | | 0.2 | 0.4 | |
| TXD Drive Current | Symbol: I _T | | 2 | | | mA |
| RXD Output Current | Symbol: I _R | | | | 10 | mA |
| Serial Interface | Standard CAN controller interface | | | | | |
| TRANSMISSION SPECIFICATIONS | | | | | | |
| Data Delay | Symbol: t _T | TXD Transmit Delay | | 60 | 115 | ns |
| | Symbol: t _R | RXD Receive Delay | | 70 | 135 | |
| | Symbol: t _{PRO(TXD-RXD)} | Cycle Delay | | 130 | 250 | |
| OUTPUT SPECIFICATIONS | | | | | | |
| Dominant Level (Logic 0) | Symbol: V _{(OD)CANH} | CANH | 2.75 | 3.5 | 4.5 | VDC |
| | Symbol: V _{(OD)CANL} | CANL | 0.5 | 1.5 | 2.25 | |
| Recessive Level (Logic 1) | Symbol: V _{(OR)CANH} | CANH | 2 | 2.5 | 3 | VDC |
| | Symbol: V _{(OR)CANL} | CANL | 2 | 2.5 | 3 | |
| Differential Level | Symbol: V _{diff(d)} | Dominant Level (Logic 0) | 1.5 | 2 | 3 | VDC |
| | Symbol: V _{diff(r)} | Recessive Level (Logic 1) | -0.05 | 0 | 0.05 | |
| Bus Pin Maximum Withstand Voltage | Symbol: V _X | | -36 | | +36 | VDC |
| Bus Transient Voltage | Symbol: V _{trt} , Meets ISO7637-3 standard | | -100 | | +100 | VDC |
| Bus Pin Leakage Current | Symbol: (VCC=0V, V _{CANH/L} =5V) | | -5 | | 5 | µA |
| Differential Load Resistance | Symbol: R _L | | 45 | 60 | 65 | Ω |
| Differential Input Impedance | Symbol: R _{diff} | | 20 | | 100 | kΩ |
| CAN Bus Interface | Meets ISO/DIS 11898 Standard Twisted-pair output | | | | | |

| SPECIFICATIONS | | | | | | | |
|--|--|-----------------|---|--|------|------|------|
| <p style="color: red;">All specifications are based on 25°C, Humidity <75%, Nominal Input Voltage, and Rated Output Load unless otherwise noted. We reserve the right to change specifications based on technological advances.</p> | | | | | | | |
| SPECIFICATION | TEST CONDITIONS | | | Min | Typ | Max | Unit |
| ENVIRONMENTAL SPECIFICATIONS | | | | | | | |
| Operating Temperature | | | | -40 | | +105 | °C |
| Transportation & Storage Temperature | | | | -50 | | 125 | °C |
| Operating Humidity | Non-Condensing | | | 10 | | 90 | % |
| Pin Welding Resistance Temperature | Welding spot is 1.5mm away from the casing, 10 seconds | | | | | 300 | °C |
| Cooling Method | | | | Free Air Convection | | | |
| GENERAL SPECIFICATIONS | | | | | | | |
| Isolation Voltage | Test for 1 minute, leakage current <1mA | | | | 3.0 | | kVDC |
| Insulation Resistance | Isolation Voltage 500VDC, Input-Output | | | | 1000 | | MΩ |
| PHYSICAL SPECIFICATIONS | | | | | | | |
| Weight | | | | 0.067oz (1.90g) Typ. | | | |
| Dimensions (L x W x H) | DIP8 | | | 0.72in x 0.58in x 0.28in (18.20mm x 14.80mm x 7.10mm) | | | |
| SAFETY CHARACTERISTICS | | | | | | | |
| Safety Standard & Certification | | | | EN60950 | | | |
| Safety Class | | | | Class III | | | |
| EMI | CE | | | CISPR/EN55032 | | | |
| | | | | Class A ⁽¹⁾ | | | |
| EMS | ESD | IEC/EN61000-4-2 | Contact ±4kV (Bare component, Signal Port) | Perf. Criteria A | | | |
| | RS | IEC/EN61000-4-3 | 10V/m (Bare Component) | Perf. Criteria A | | | |
| | EFT | IEC/EN61000-4-4 | ±2kV (Bare Component, Signal Port) | Perf. Criteria B | | | |
| | Surge | IEC/EN61000-4-5 | ±2kV (Bare Component, Signal Port) | Perf. Criteria A | | | |
| | CS | IEC/EN61000-4-6 | 3Vr.m.s. (Bare Component) | Perf. Criteria A | | | |

NOTES


- See Fig. 3
- The performance indexes of the product models are as listed in the data sheet above, but some indexes of non-standard model products will exceed the above mentioned requirements. Contact factory for specific information.
- PCB surface may have micro-color difference-this is a normal phenomenon & does not affect use of product.
- Products shall be classified according to ISO14001 and related environmental laws and regulations & should be handled by qualifying units.
- Customization available.

Application Precautions:

- Please read instructions carefully before use; call factory if you have questions.
- Do not use product in hazardous area
- This product is powered by DC power supply. 220VAC power supply is prohibited.
- Do not dismount and assemble the product without permission to avoid failure or malfunction of equipment.
- Ex factory inspection and quality control have been strictly conducted for this product. If any abnormal operation or possibility of failure occurs in internal module, please contact factory for support.

**Due to advances in technology, specifications subject to change without notice.*

MECHANICAL DRAWINGS

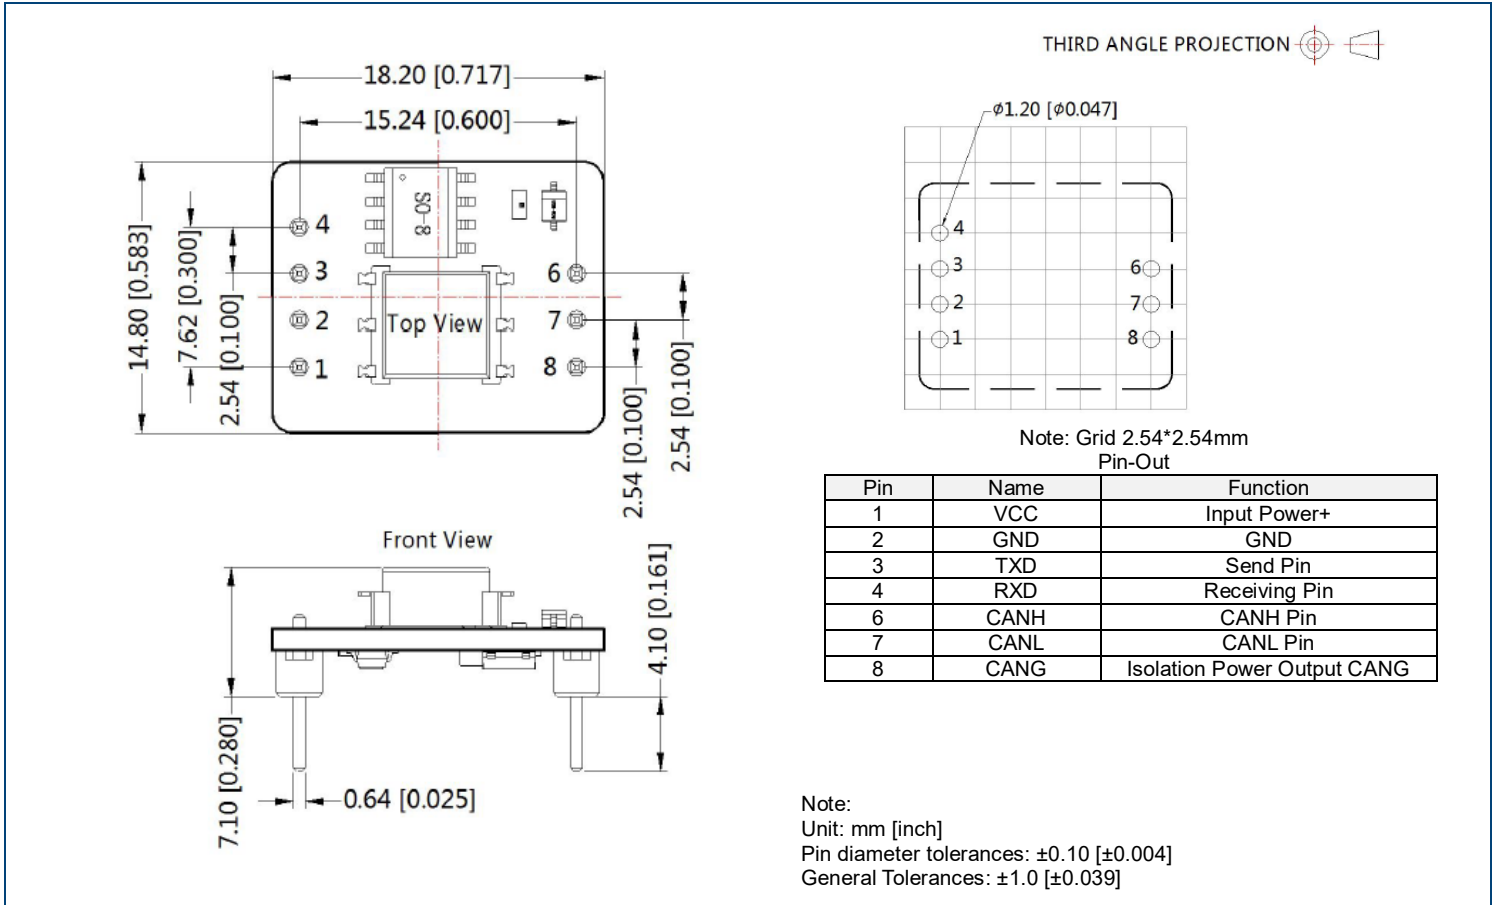

DESIGN REFERENCE

1. Typical Application Circuit

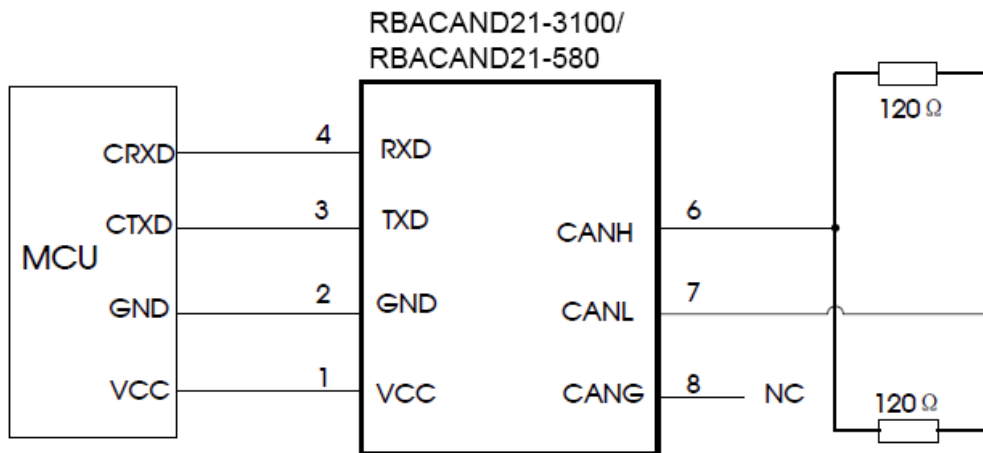


Fig. 1

In general, the module, which is properly connected to the power supply, CAN controller and CAN bus network interface, can be directly used by customers without adding peripheral circuits. Figure 1 shows a typical application circuit connection for a module.

Note: CAN controller logic level should be compatible with RBCAND21-3100/RBCAND21-580 isolated CAN transceiver module.

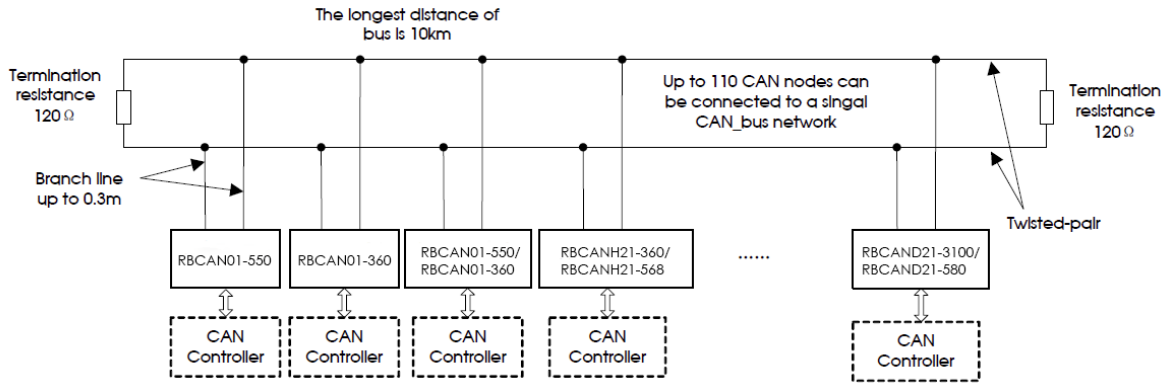


Fig. 2

As shown in Figure 2, a single CAN-bus network can connect up to 110 single-channel RBCAN isolated CAN transceiver modules. The universal type module can support a max. communication distance of 10km while the high-speed type module can support a max communication distance of 1km with baud rate beyond 40kbps. If looking to access more nodes or longer communication distance, it can be achieved by using CAN repeaters or other expansion equipment.

Notes: The communication distance of the bus is related to the communication speed and field application. It can be designed according to the actual application and reference standard. It is recommended that the communication cable is a twisted pair or shielded twisted pair and should stay away from the interference source. For long-distance communication, the terminal resistance value needs to be selected according to the communication distance and the cable impedance and the number of nodes.

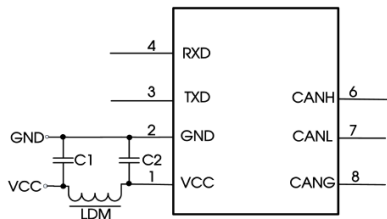


Fig. 3

| Components | Parameter |
|------------|-----------|
| C1 C2 | 1uF/16V |
| LDM | CD43-12uH |

2. Recommended Port Protection Circuit

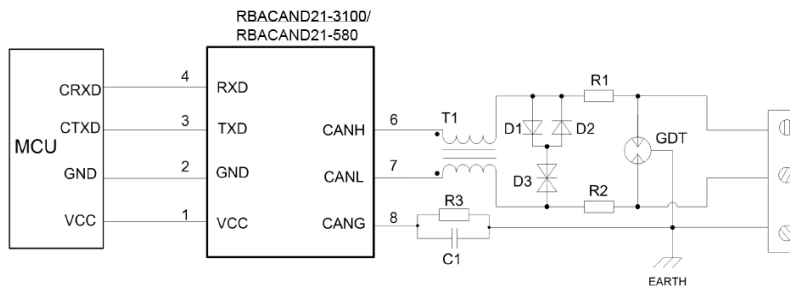


Fig. 4

Note: Twisted pair shield grounded reliably.

Parameter declaration:

| Components | Recommended Parameters | Components | Recommended Parameters |
|------------|------------------------|------------|------------------------|
| R3 | 1MΩ | R1, R2 | 2.7Ω/2W |
| C1 | 102.2kV | D1, D2 | 1N4007 |
| T1 | ACM2520-301-2P | D3 | SMBJ15CA |
| GDT | B3D090L | | |

When the module is used in harsh field environment, it is susceptible to the large energy of lightning strike. In this case, it is necessary to add protection circuit to the CAN signal port to protect the module from damage and ensure the reliability of bus communication. Figure 2 provides a recommended protection circuit design for the high-energy lightning surges, with a degree of protection related to the selected protection device. Parameter description lists a set of recommended circuit parameters, which can be adjusted according to the actual application situation. Also, when using the shielded cable, the reliable single-point grounding of the shield must be achieved.

Note: This recommended parameter is only the recommended value, which is subject to the actual application. Recommended R1, R2 use PTC, D1, D2 use fast recovery diodes.

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.