

DIP Package ("T" Suffix)



Size: 0.95in x 0.57in x 0.40in (24.3mm x 14.4mm x 10.2mm)

SMD Package ("S" Suffix)



Size: 0.95in x 0.71in x 0.41in (24.3mm x 18.1mm x 10.5mm)



OPTIONS

- Package Type
 - DIP
 - SMD

FEATURES

- 2:1 Input Voltage Range
- Low Leakage Current
- Through Hole or Surface Mount Package
- 5000VAC Reinforced Insulation
- RoHS & REACH Compliant
- Over Voltage and Short Circuit Protection
- Remote On/Off
- 2xMOPP
- IEC/EN/ANSI/AAMI ES 60601-1 and IEC/EN/UL 60950-1, 62368-1 Safety Approvals

APPLICATIONS

- Medical
- PV
- Automation
- Datacom
- Telecom
- IPC
- Industrial
- Measurement

DESCRIPTION

The DCMSD02 series of medical DC/DC converters offers up to 2.01 watts of output power in a compact DIP or SMD package. This series consists of both single and dual output models with a 2:1 input voltage range. Features of this series include low leakage current, remote on/off, and 5000VAC reinforced insulation. The DCMSD02 series has protection against over voltage and short circuit conditions as well as IEC/EN/ANSI/AAMI ES 60601-1 and IEC/EN/UL 60950-1, 62368-1 safety approvals.

MODEL SELECTION TABLE

Single Output Model

Model Number ⁽¹⁾	Input Voltage Range	Output Voltage	Output Current @Full Load	No Load Input Current	Efficiency	Maximum Capacitive Load	Output Power
DCMSD02-05S03x	5VDC (4.5~12VDC)	3.3VDC	600mA	60mA	75%	1000µF	Up to 2.01 Watts
DCMSD02-05S05x		5VDC	400mA	60mA	78%	1000µF	
DCMSD02-05S09x		9VDC	222mA	60mA	78%	430µF	
DCMSD02-05S12x		12VDC	167mA	70mA	82%	220µF	
DCMSD02-05S15x		15VDC	134mA	80mA	82%	170µF	
DCMSD02-05S24x		24VDC	83mA	80mA	82%	100µF	
DCMSD02-12S03x	12VDC (9~18VDC)	3.3VDC	600mA	30mA	76%	1000µF	Up to 2.01 Watts
DCMSD02-12S05x		5VDC	400mA	40mA	78%	1000µF	
DCMSD02-12S09x		9VDC	222mA	40mA	79%	430µF	
DCMSD02-12S12x		12VDC	167mA	40mA	82%	220µF	
DCMSD02-12S15x		15VDC	134mA	45mA	82%	170µF	
DCMSD02-12S24x		24VDC	83mA	45mA	81%	100µF	
DCMSD02-24S03x	24VDC (18~36VDC)	3.3VDC	600mA	20mA	76%	1000µF	Up to 2.01 Watts
DCMSD02-24S05x		5VDC	400mA	20mA	79%	1000µF	
DCMSD02-24S09x		9VDC	222mA	25mA	80%	430µF	
DCMSD02-24S12x		12VDC	167mA	25mA	81%	220µF	
DCMSD02-24S15x		15VDC	134mA	25mA	81%	170µF	
DCMSD02-24S24x		24VDC	83mA	25mA	81%	100µF	
DCMSD02-48S03x	48VDC (36~75VDC)	3.3VDC	600mA	10mA	76%	1000µF	Up to 2.01 Watts
DCMSD02-48S05x		5VDC	400mA	10mA	78%	1000µF	
DCMSD02-48S09x		9VDC	222mA	12mA	79%	430µF	
DCMSD02-48S12x		12VDC	167mA	12mA	80%	220µF	
DCMSD02-48S15x		15VDC	134mA	12mA	82%	170µF	
DCMSD02-48S24x		24VDC	83mA	12mA	81%	100µF	

MODEL SELECTION TABLE							
Dual Output Models							
Model Number	Input Voltage Range	Output Voltage	Output Current @ Full Load	No Load Input Current	Efficiency	Maximum Capacitive Load	Output Power
DCMSD02-05D12x	5VDC (4.5~12VDC)	±12VDC	±83mA	80mA	82%	±170µF	Up to 2.01 Watts
DCMSD02-05D15x		±15VDC	±67mA	90mA	80%	±100µF	
DCMSD02-12D12x	12VDC (9~18VDC)	±12VDC	±83mA	45mA	81%	±170µF	Up to 2.01 Watts
DCMSD02-12D15x		±15VDC	±67mA	45mA	81%	±100µF	
DCMSD02-24D12x	24VDC (18~36VDC)	±12VDC	±83mA	25mA	81%	±170µF	Up to 2.01 Watts
DCMSD02-24D15x		±15VDC	±67mA	25mA	81%	±100µF	
DCMSD02-48D12x	48VDC (36~75VDC)	±12VDC	±83mA	12mA	81%	±170µF	Up to 2.01 Watts
DCMSD02-48D15x		±15VDC	±67mA	12mA	81%	±100µF	

SPECIFICATIONS								
<p style="color: red;">All specifications are typical at 25°C, Nominal Input, and Full Load unless otherwise noted. We reserve the right to change specifications based on technological advances.</p>								
SPECIFICATION	TEST CONDITIONS			Min	Typ	Max	Unit	
INPUT SPECIFICATIONS								
Input Voltage Range	5Vin Nominal Input Models			4.5	5	12	VDC	
	12Vin Nominal Input Models			9	12	18		
	24Vin Nominal Input Models			18	24	36		
	48Vin Nominal Input Models			36	48	75		
Start-Up Voltage	5Vin Nominal Input Models					4.5	VDC	
	12Vin Nominal Input Models					9		
	24Vin Nominal Input Models					18		
	48Vin Nominal Input Models					36		
Shutdown Voltage	5Vin Nominal Input Models			2	3	4	VDC	
	12Vin Nominal Input Models			6	7	8		
	24Vin Nominal Input Models			13	15	17		
	48Vin Nominal Input Models			29	32	35		
Input Surge Voltage	1 Second, max.	5Vin Nominal Input Models					15	VDC
		12Vin Nominal Input Models					25	
		24Vin Nominal Input Models					50	
		48Vin Nominal Input Models					100	
Input Filter				Capacitor Type				
OUTPUT SPECIFICATIONS								
Output Voltage				See Table				
Voltage Accuracy				-1.0		+1.0	%	
Line Regulation	Low Line to High Line at Full Load			-0.2		+0.2	%	
Load Regulation	No Load to Full Load		Single	-1.0		+1.0	%	
			Dual	-1.0		+1.0		
	10% Load to 90% Load		Single	-0.5		+0.5		
			Dual	-0.8		+0.8		
Cross Regulation	Asymmetrical Load 25%/100% FL, Dual			-5.0		+5.0	%	
Output Power				See Table				
Output Current				See Table				
Maximum Capacitive Load				See Table				
Ripple & Noise	Measured by 20MHz bandwidth				50		mVp-p	
Transient Response Recovery Time	25% Load Step Change				500		µs	
Start-Up Time	Constant Resistive Load		Power Up		10	20	ms	
			Remote ON/OFF					
Temperature Coefficient				-0.02		+0.02	%/°C	
REMOTE ON/OFF CONTROL⁽²⁾								
DC-DC ON				Open or High Impedance				
DC-DC OFF				2.0	3.0	4.0	mA	
Remote Off Input Current					2.5		mA	
PROTECTION								
Short Circuit Protection				Continuous, Automatic Recovery				
Over Voltage Protection	3.3Vout Models			4.0		6.5	VDC	
	5Vout Models			6.0		8.0		
	9Vout Models			10.0		14.0		
	12Vout Models			13.0		19.0		
	15Vout Models			16.0		22.0		
	24Vout Models			25.0		35.0		

SPECIFICATIONS

All specifications are typical at 25°C, Nominal Input, and Full Load unless otherwise noted.
We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
ENVIRONMENTAL SPECIFICATIONS					
Operating Ambient Temperature	With Derating	-40		+105	°C
Storage Temperature		-55		+125	°C
Maximum Case Temperature				+105	°C
Relative Humidity		5		95	%RH
Operating Altitude				5000	m
Shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Thermal Shock				MIL-STD-810F	
Lead-Free Reflow Solder Process	SMD Type Only ("S" Suffix)			IPC J-STD-020E	
Moisture Sensitivity Level (MSL)	SMD Type Only ("S" Suffix)			IPC J-STD-033C, Level 2	
MTBF	MIL-HDBK-217F, Full Load		6,809,000		Hours
GENERAL SPECIFICATIONS					
Efficiency		See Table			
Switching Frequency		100			kHz
Isolation Voltage	1 minute, reinforced insulation for 250VAC working voltage	5000			VAC
Isolation Resistance		10			GΩ
Isolation Capacitance			16	20	pF
Leakage Current	240VAC, 60Hz			2	μA
Clearance/Creepage		8			mm
PHYSICAL SPECIFICATIONS					
Weight		0.24oz (7.0g)			
Dimensions (L x W x H)	DIP Package ("T" Suffix)	0.95in x 0.57in x 0.40in (24.3mm x 14.4mm x 10.2mm)			
	SMD Package ("S" Suffix)	0.95in x 0.71in x 0.41in (24.3mm x 18.1mm x 10.5mm)			
Case Material		Non-Conductive Black Plastic			
Base Material		Non-Conductive Black Plastic			
Potting Material		Silicon (UL94 V-0)			
SAFETY CHARACTERISTICS					
Safety Approvals		IEC/EN/ANSI/AAMI ES 60601-1 IEC/EN/UL 62368-1		CB: UL (Demko)	
EMI	EN55011, EN55032, EN60601-1-2 and FCC Part 18/15 with external components			Class A, Class B	
EMS	EN55024 and EN60601-1-2				
ESD	EN61000-4-2	Air ±15kV and Contact ±8kV		Perf. Criteria A	
Radiated Immunity	EN61000-4-3	10 V/m		Perf. Criteria A	
Fast Transient ⁽³⁾	EN61000-4-4	±2kV		Perf. Criteria A	
Surge	EN61000-4-5	±1kV		Perf. Criteria A	
Conducted Immunity	EN61000-4-6	10 Vr.m.s		Perf. Criteria A	
Power Frequency Magnetic Field	EN61000-4-8	100A/m continuous; 1000A/m 1 second		Perf. Criteria A	

NOTES

- "X" in model number stands for case type. "X" can either be "T" for DIP package, or "S" for SMD package.
- Referred to -Vin and Ctrl pin applied current.




- 5Vin Nominal Input Models: With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 1000μF/25V) and a TVS (SMAJ18A, 18V, 400 Watt peak pulse power) in parallel.
12Vin & 24Vin Nominal Input Models: With an external input filter capacitor (Nippon chemi-con KY series, 470μF/50V)
48Vin Nominal Input Models: With an external input filter capacitor (Nippon chemi-con KY series, 220μF/100V)
- This product is listed to applicable standards and requirements by UL.


CAUTION: This power module is not internally fused. An input line fuse must always be used.

*Due to advances in technology, specifications subject to change without notice.

DERATING CURVES

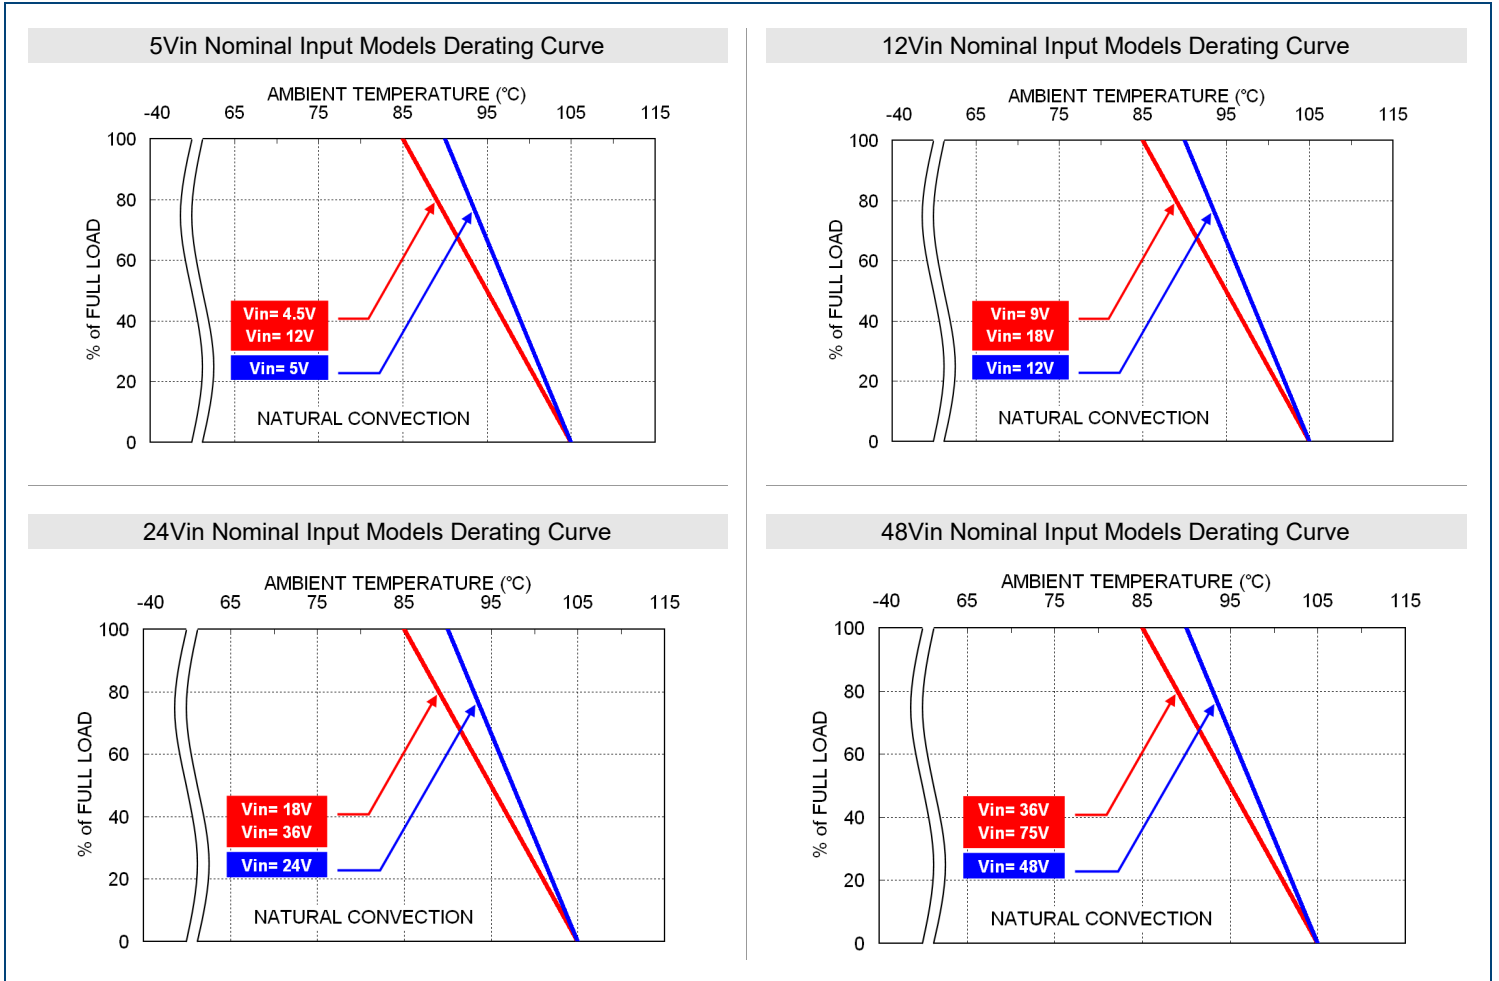


EFFICIENCY GRAPHS

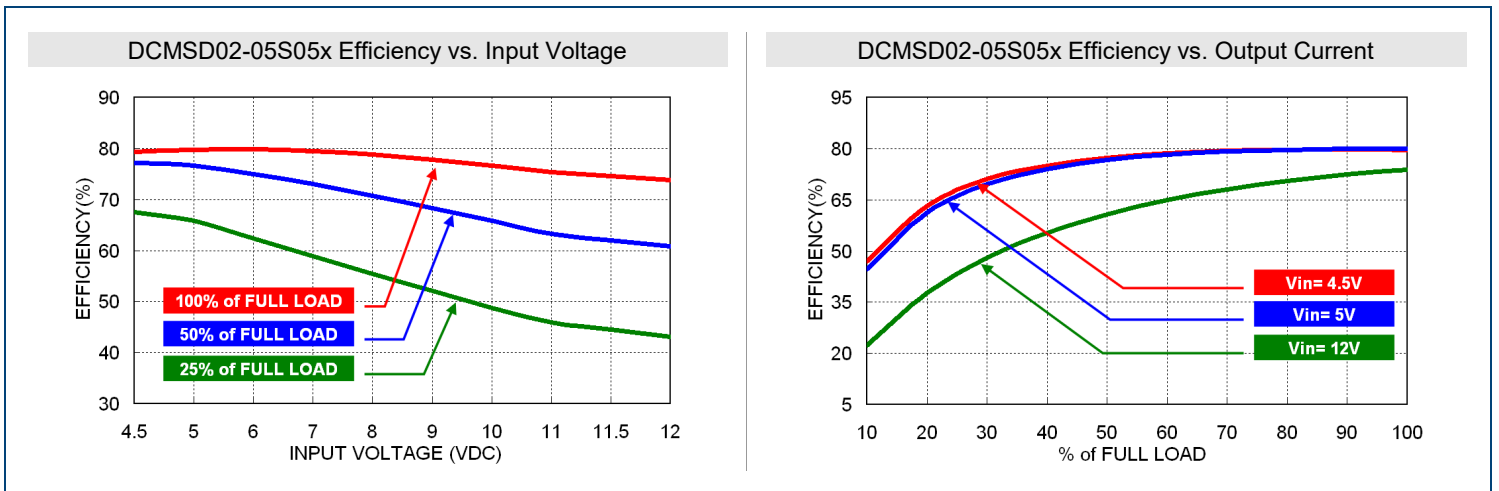

MECHANICAL DRAWINGS


DIP Package ("T" Suffix)

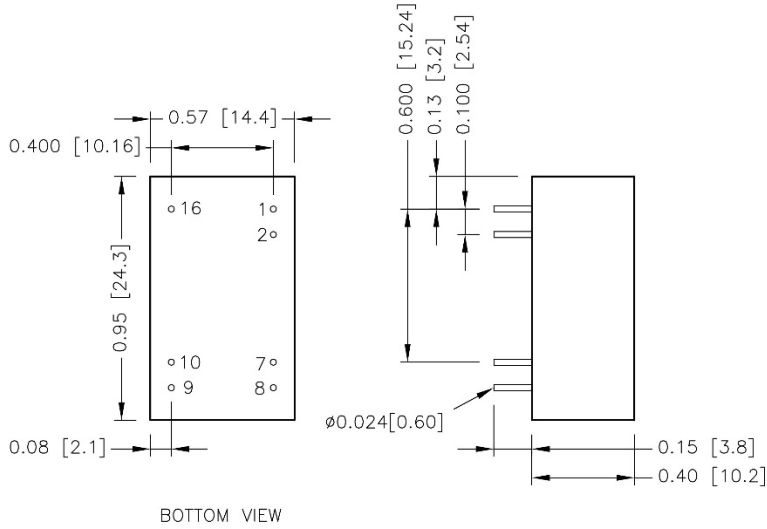

Pin Connections

PIN	SINGLE	DUAL
1	-Vin	-Vin
2	Ctrl	Ctrl
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

SMD Package ("S" Suffix)

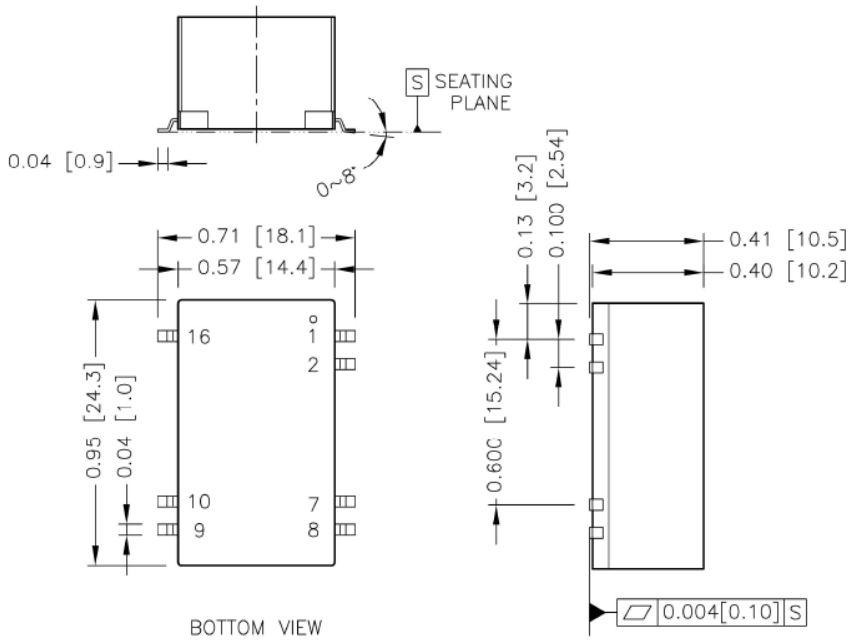


Notes:

1. All dimensions in inch [mm]
2. Tolerance: x.xxx±0.02 [x.xx±0.5]
x.xxx±0.010 [x.xx±0.25]
3. Pin dimension tolerance ±0.004 [0.10]


RECOMMENDED PAD LAYOUT

DIP Package ("T" Suffix)

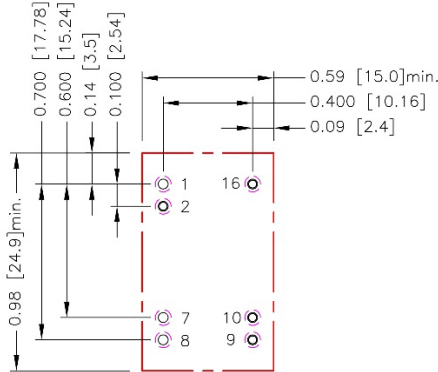

Note:
All dimensions in inch [mm]
Pad size (lead free recommended)
Through hole 1.2.7.8.9.10.16: Ø0.035 [0.90]
Top view pad 1.2.7.8.9.10.16: Ø0.044 [1.13]
Bottom view pad 1.2.7.8.9.10.16: Ø0.071 [1.80]

SMD Package ("S" Suffix)

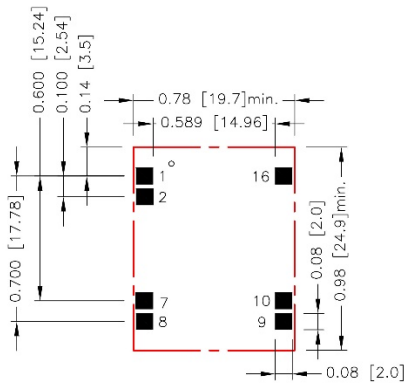


Note:
All dimensions in inch [mm]
Pad size (lead free recommended)
Top view pad: 0.080x0.080 [2.00x2.00]

*There should be at least 8mm distance between primary and secondary circuit.
**For further information, contact factory.

TERMINAL BLOCK OPTIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

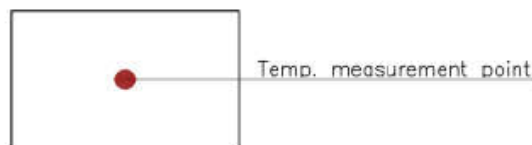

TOP VIEW

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used. This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture. To maximize flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The suggested input line is below:

Model	Fuse Rating (A)	Fuse Type
5Vin Nominal Input Models	1	Slow-Blow
12Vin Nominal Input Models	0.5	Slow-Blow
24Vin Nominal Input Models	0.315	Slow-Blow
48Vin Nominal Input Models	0.16	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MODEL NUMBER SETUP

DCMSD	02	-	05	S	05	T
Series Name	Output Power		Input Voltage	Output Quantity	Ouput Voltage	Package Type
			05: 4.5~12VDC 12: 9~18VDC 24: 18~36VDC 48: 36~75VDC	S: Single D: Dual	03: 3.3VDC 05: 5VDC 09: 9VDC 12: 12VDC 15: 15VDC 24: 24VDC 12: ±12VDC 15: ±15VDC	T: DIP Package S: SMD Package

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
 Toll Free: ☎(888)597-9255
 Fax: ☎(603)778-9797
 E-mail: sales@wallindustries.com
 Web: www.wallindustries.com
 Address: 37 Industrial Drive
 Exeter, NH 03833

©2021 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.