



Size: 7.05in x 3.90in x 1.81in
(179mm x 99mm x 30mm)

FEATURES

- Universal 85-305VAC or 120~430VDC Input Voltage
- Accepts AC or DC Input (Dual-Use of Same Terminal)
- Built-In Active PFC Function
- High I/O Isolation Test Voltage up to 4000VAC
- Output Short Circuit, Over Current, Over Voltage, and Over Temperature Protection
- Remote ON-OFF control
- Operating altitude up to 5000m
- Over-voltage class III (designed to meet EN61558)
- Safety According to IEC/EN/UL62368, GB4943

APPLICATIONS

- Industrial
- LED
- Street Light Control
- Security
- Telecommunications
- Smart Home

DESCRIPTION

The PSEF150 series of AC/DC switching power supplies offers up to 153.6 watts of output power in an enclosed 6.47" x 4.53" x 1.81" package. This series consists of single output models with an input voltage range of 85~305VAC or 120~430VAC as this series accepts AC or DC input. Each model features built-in active PFC function, high isolation test voltage, high efficiency and high reliability. This series has short circuit, over current, over voltage, and over temperature protection, and also has IEC/EN/UL62368 safety approvals.

MODEL SELECTION TABLE

Model Number ⁽¹⁾	Input Voltage Range	Output Voltage	Output Current	Output Voltage Adjustable Range	Max. Ripple & Noise	Output Power	Maximum Capacitive Load	Efficiency
PSEF150-12S	85-305VAC (120-430VDC)	12V	12.5A	10.2-13.8V	100mV	150W	5000µF	85.5%
PSEF150-15S		15V	10A	13.5-18V	100mV	150W	5000µF	86%
PSEF150-24S		24V	6.3A	21.6-28.8V	150mV	151.2W	5000µF	87%
PSEF150-48S		48V	3.2A	45.6-55.2V	250mV	153.6W	3000µF	88%

SPECIFICATIONS

All specifications are based on 25°C, Humidity <75%RH, Nominal Input Voltage, and Rated Output Load unless otherwise noted. We reserve the right to change specifications based on technological advances.

SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit
	INPUT SPECIFICATIONS					
Input Voltage Range	AC Input		85		305	VAC
	DC Input		120		430	VDC
Input Voltage Frequency			47		63	Hz
Input Current	85VAC				2.5	A
	115VAC				2.0	
	230VAC				1.0	
Inrush Current	Cold Start	115VAC			30	A
		230VAC			45	
Power Factor	Full Load	115VAC	0.97	0.99		
		230VAC	0.91	0.98		
Hot Plug			Unavailable			
Leakage Current	277VAC				2	mA
OUTPUT SPECIFICATIONS						
Output Voltage			See Table			
Voltage Accuracy	Full Load Range	12V/15V		±2		%
		24V/48V		±1		
Line Regulation	Rated Load			±0.5		%
Load Regulation	0% - 100%			±0.5		%
Output Voltage Adjustable Range			See Table			
Output Power			See Table			
Output Current			See Table			
Minimum Load			0			%
Maximum Capacitive Load			See Table			
Ripple & Noise ⁽³⁾	20MHz bandwidth (peak-to-peak value)	12V/15V		100		mV
		24V		150		
		48V		250		
Hold-Up Time	230VAC		16			ms
Temperature Coefficient				±0.05		%/°C

SPECIFICATIONS

All specifications are based on 25°C, Humidity <75%RH, Nominal Input Voltage, and Rated Output Load unless otherwise noted.
We reserve the right to change specifications based on technological advances.


SPECIFICATION	TEST CONDITIONS		Min	Typ	Max	Unit
PROTECTION						
Short Circuit Protection	Recovery time <3s after the short circuit disappears		Constant current, continuous, self-recover			
Over Current Protection	Constant Current Mode, Self-Recovery		105		150	%Io
Over-voltage Protection	Output voltage turn off, re-power on for recover	12V		≤16.8		
		15V		≤24.5		
		24V		≤33.6		
		48V		≤60		
Over Temperature Protection ⁽³⁾	Over-temperature Protection Activation				85	°C
	Over-temperature Protection Deactivation		50			
REMOTE CONTROL						
Power ON	Open or 0~0.8VDC		0		0.8	VDC
Power OFF	4-10VDC		4		10	
ENVIRONMENTAL SPECIFICATIONS						
Operating Temperature			-30		+70	°C
Storage Temperature			-40		+85	°C
Altitude					5000	m
Storage Humidity	Non-Condensing		10		95	%RH
Power Derating	+50°C to 70°C		2			%/ ^o C
	-30°C to -20°C		4			
	85VAC-100VAC		1.3			%/VAC
	2000m-5000m		5			%/Km
MTBF	MIL-HDBK-217F@25°C		>300,000			H
GENERAL SPECIFICATIONS						
Efficiency			See Table			
Isolation Test	Electric Strength Test for 1min., leakage current <10mA	Input - \perp	2000			VAC
		Input - Output	4000			
Insulation Resistance	500VDC, 25±5°C Humidity <95%RH, non-condensing 500VDC	Output - \perp	500			MΩ
		Input - \perp	100			
		Input - Output	100			
PHYSICAL SPECIFICATIONS						
Weight			1.10lbs (500g)			
Dimensions (L x W x H)			7.05in x 3.90in x 1.81in (179mm x 99mm x 30mm)			
Case Material			Metal (AL1100, SGCC)			
Cooling			Free air convection			
SAFETY CHARACTERISTICS						
Safety Standard ⁽⁴⁾			UL/EN/IEC6268/EN60335/EN61558/GB4943			
Safety Certification ⁽⁴⁾			IEC/EN/UL62368/GB4943			
Safety Class			Class I			
Emissions	CE	CISPR32/EN55032			Class B	
	RE	CISPR32/EN55032			Class B	
	Harmonic Current	IEC/EN61000-3-2			Class A and Class D	
	Voltage Flicker	IEC/EN61000-3-3				
Immunity	ESD	IEC/EN 61000-4-2	Contact ±6KV/Air ±8KV		Perf. Criteria A	
	RS	IEC/EN 61000-4-3	10V/m		Perf. Criteria B	
	EFT	IEC/EN 61000-4-4	±2KV		Perf. Criteria A	
	Surge	IEC/EN 61000-4-5	±1KV/±2KV		Perf. Criteria A	
	CS	IEC/EN 61000-4-6	10 Vr.m.s		Perf. Criteria A	
	DIP (AC Input)	IEC/EN 61000-4-11	0%, 70%		Perf. Criteria B	

NOTES


1. Add "C" to model number to indicate terminal with protective cover, and "Q" to model number for conformal coating.
2. Tip and barrel method is used for ripple and noise test. Output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, contact factory for more information.
3. Over-Temperature Protection needs to be tested under rated full load conditions.
4. This product is Listed to applicable standards and requirements by UL.
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but does not affect product performance and reliability.
6. Product customization service is available, please contact factory for more details.
7. Out case needs to be connected to PE (≡) of system when terminal equipment in operating.
8. Output voltage can be adjusted by the ADJ, clockwise to decrease
9. Products should be classified according to ISO14001 and related environmental laws and regulations and should be handled by qualified.
10. Power supply is considered a component which will be installed into terminal equipment. All EMC tests should be confirmed with final equipment.

**Due to advances in technology, specifications subject to change without notice.*

DERATING CURVES

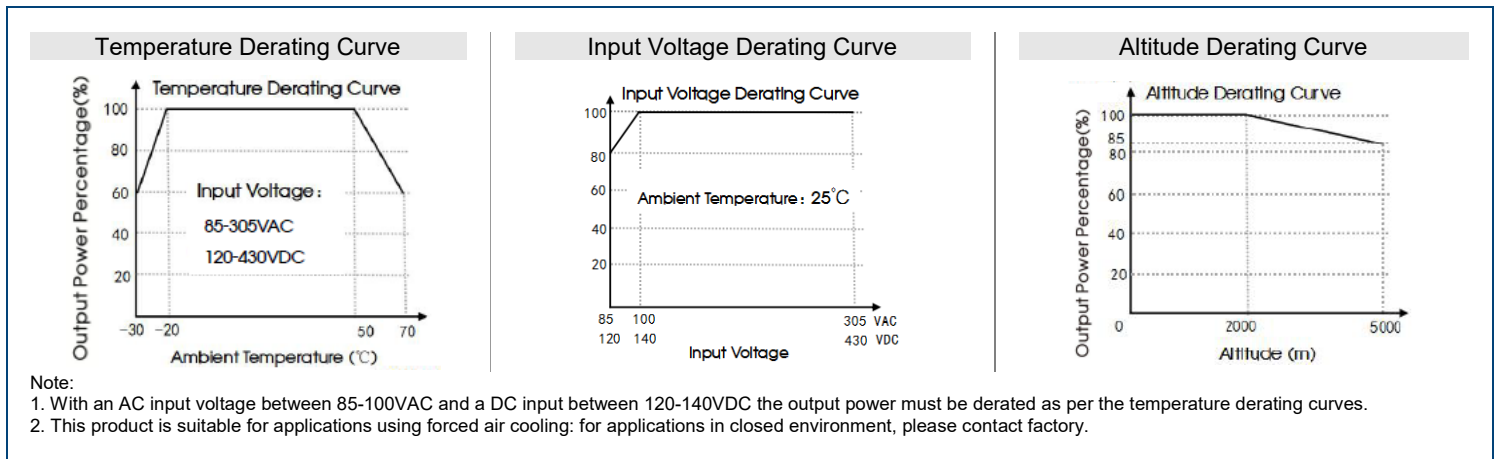


EFFICIENCY GRAPHS

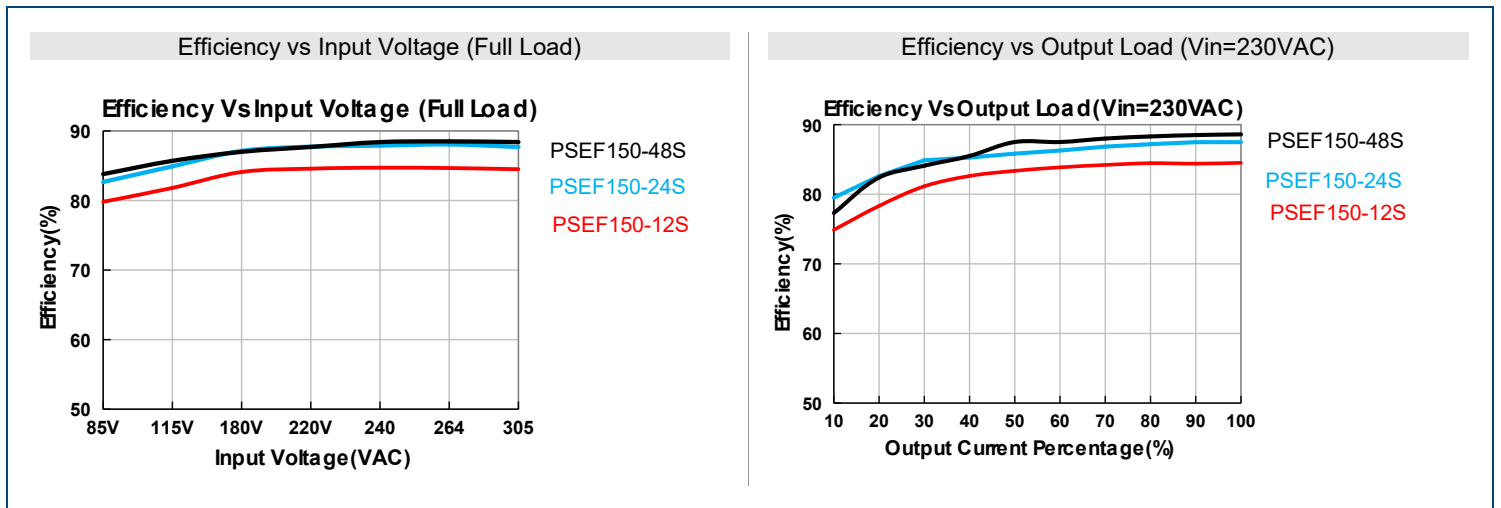


MECHANICAL DRAWINGS

Standard and "Q" Suffix Models

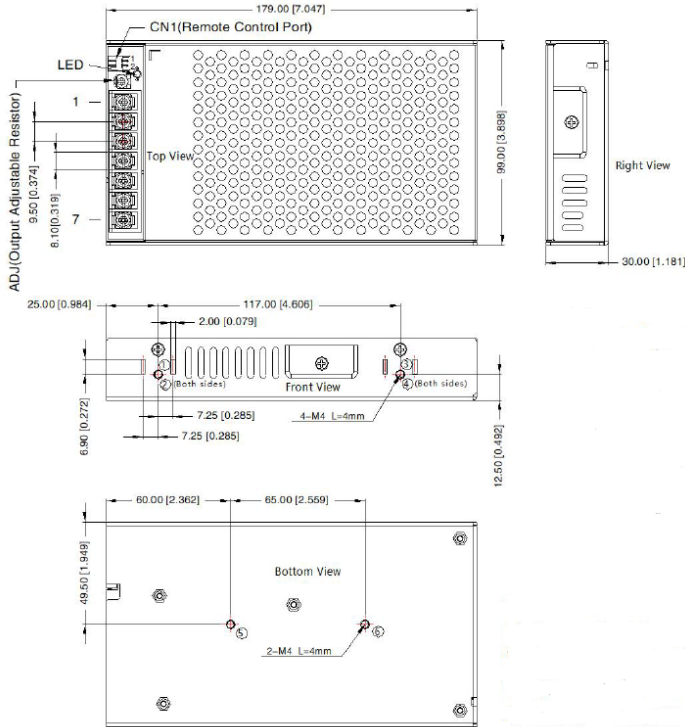

THIRD ANGLE PROJECTION




Pin Out	
Pin	Mark
1	+Vo
2	+Vo
3	-Vo
4	-Vo
5	⊕
6	AC(N)
7	AC(L)

①-⑥ any position must be connected to the earth (⊕)


CN1: KANGDAO TJC3-NAWD-2P or the same spec.

Pin	Function	Connector	Terminal
1	RC+	KANGDAO XH25001-2Y or the same spec.	KANGDAO XH2.54-TE or the same spec.
2	RC-		

"C" Suffix Models

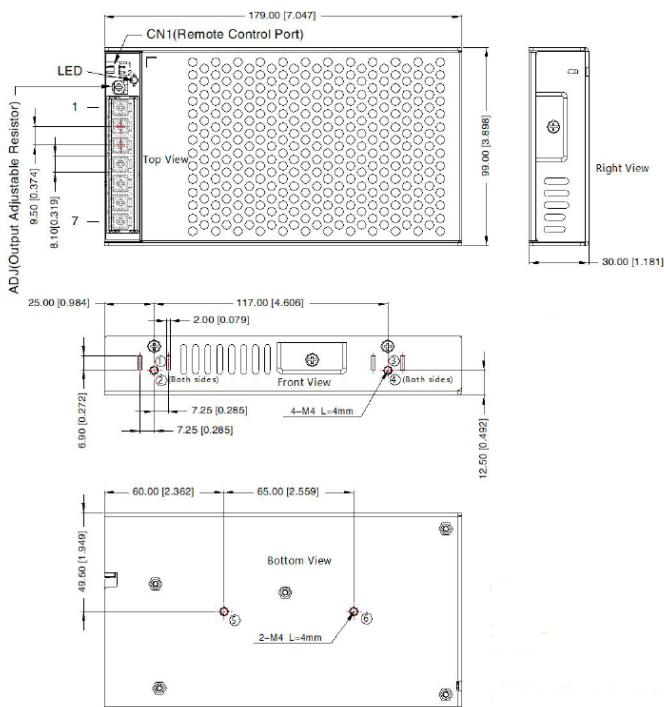

Position	Screw Spec.	L(max)	Torque(max)
①-⑥	M4	4mm	0.9N·m



Note:
Unit: mm [inch]
Wire range: 22-12AWG
Connector Tightening Torque: M3.5, 0.8N·m
General tolerances: ±1.00 [±0.039]

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001: 2015 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎ (603)778-2300
Toll Free: ☎ (888)597-9255
Fax: ☎ (603)778-9797
E-mail: sales@wallindustries.com
Web: www.wallindustries.com
Address: 37 Industrial Drive
Exeter, NH 03833

©2021 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.