



Size: 3.94in x 2.28in x 1.22in (100mm x 58mm x 31mm)

FEATURES

- Single and Dual Outputs
- 2:1 Input Voltage Range
- High Reliability
- Electrolytic Capacitors all 105°C
- Short Circuit and Over Load Protected
- RoHS Compliant
- Built-In EMI Filter
- Free Air Convection
- Design Refers to GB4943, UL60950, and EN6090

DESCRIPTION

The DCHF10W series of DC/DC power converters offers output power from 10~16.2 Watts in a 3.94" x 2.83" x 1.22" enclosed case. This series has 2:1 input voltage ranges of 10-18VDC, 18-36VDC, 36-72VDC, and 72-144VDC. This series also has single and dual output models available. Some features include output adjustability, a built-in EMI filter, and short circuit and over load protection. All models in this series are RoHS compliant.

MODEL SELECTION TABLE
Single Outputs

Model Number	Input Voltage Range	Output Voltage	Output Current	Ripple & Noise	Output Power	Efficiency
DCHF10W-SD12-5	12 VDC (10 – 18 VDC)	5 VDC	2.0 A	80mVp-p	10W	70%
DCHF10W-SD12-12		12 VDC	1.0 A	120mVp-p	12W	72%
DCHF10W-SD12-24		24 VDC	0.5 A	150mVp-p	12W	76%
DCHF10W-SD24-5	24 VDC (18 – 36 VDC)	5 VDC	2.0 A	80mVp-p	10W	70%
DCHF10W-SD24-12		12 VDC	1.0 A	120mVp-p	12W	72%
DCHF10W-SD24-24		24 VDC	0.5 A	150mVp-p	12W	76%
DCHF10W-SD48-5	48 VDC (36 – 72 VDC)	5 VDC	2.0 A	80mVp-p	10W	70%
DCHF10W-SD48-12		12 VDC	1.0 A	120mVp-p	12W	72%
DCHF10W-SD48-24		24 VDC	0.5 A	150mVp-p	12W	76%
DCHF10W-SD90-5	90 VDC (72 – 144 VDC)	5 VDC	2.0 A	80mVp-p	10W	70%
DCHF10W-SD90-12		12 VDC	1.0 A	120mVp-p	12W	72%
DCHF10W-SD90-24		24 VDC	0.5 A	150mVp-p	12W	76%
DCHF10W-SD110-5	110 VDC (72 – 144 VDC)	5 VDC	2.0 A	80mVp-p	10W	70%
DCHF10W-SD110-12		12 VDC	1.0 A	120mVp-p	12W	72%
DCHF10W-SD110-24		24 VDC	0.5 A	150mVp-p	12W	76%

MODEL SELECTION TABLE
Dual Outputs

Model Number	Input Voltage Range	Output Voltage	Output Current	Ripple & Noise	Output Power	Efficiency		
DCHF10W-DD12-A	12 VDC (10 – 18 VDC)	V1	5 VDC	0.2 ~ 1.8 A	80mVp-p	15W	68%	
		V2	12 VDC	0.1 ~ 0.5 A	120mVp-p			
DCHF10W-DD12-B		V1	5 VDC	0.2 ~ 1.8 A	80mVp-p	16.2W	69%	
		V2	24 VDC	0.05 ~ 0.3 A	150mVp-p			
DCHF10W-DD24-A		24 VDC (18 – 36 VDC)	V1	5 VDC	0.2 ~ 1.8 A	80mVp-p	15W	68%
			V2	12 VDC	0.1 ~ 0.5 A	120mVp-p		
DCHF10W-DD24-B	V1		5 VDC	0.2 ~ 1.8 A	80mVp-p	16.2W	69%	
	V2		24 VDC	0.05 ~ 0.3 A	150mVp-p			
DCHF10W-DD48-A	48 VDC (36 – 72 VDC)		V1	5 VDC	0.2 ~ 1.8 A	80mVp-p	15W	68%
			V2	12 VDC	0.1 ~ 0.5 A	120mVp-p		
DCHF10W-DD48-B		V1	5 VDC	0.2 ~ 1.8 A	80mVp-p	16.2W	69%	
		V2	24 VDC	0.05 ~ 0.3 A	150mVp-p			
DCHF10W-DD90-A		90 VDC (72 – 144 VDC)	V1	5 VDC	0.2 ~ 1.8 A	80mVp-p	15W	68%
			V2	12 VDC	0.1 ~ 0.5 A	120mVp-p		
DCHF10W-DD90-B	V1		5 VDC	0.2 ~ 1.8 A	80mVp-p	16.2W	69%	
	V2		24 VDC	0.05 ~ 0.3 A	150mVp-p			
DCHF10W-DD110-A	110 VDC (72 – 144 VDC)		V1	5 VDC	0.2 ~ 1.8 A	80mVp-p	15W	68%
			V2	12 VDC	0.1 ~ 0.5 A	120mVp-p		
DCHF10W-DD110-B		V1	5 VDC	0.2 ~ 1.8 A	80mVp-p	16.2W	69%	
		V2	24VDC	0.05 ~ 0.3 A	150mVp-p			

SPECIFICATIONS

All specifications are based on 25°C, Nominal Input Voltage, and Maximum Output Current unless otherwise noted.
 We reserve the right to change specifications based on technological advances.


SPECIFICATION	TEST CONDITIONS	Min	Typ	Max	Unit
INPUT SPECIFICATIONS					
Input Voltage Range	12VDC Nominal Input Models	10	12	18	VDC
	24VDC Nominal Input Models	18	24	36	
	48VDC Nominal Input Models	36	48	72	
	90VDC Nominal Input Models	72	90	144	
	110VDC Nominal Input Models	72	110	144	
OUTPUT SPECIFICATIONS					
Output Voltage		See Table			
Voltage Adjustment Range	Single Output Models	-10		+10	%
	Multi-Output Models: V1	-5		+5	
Line Regulation	Full Load		≤ ±0.5		%
Load Regulation	Single Output Models, V1		±1		%
	V2		±3		
Output Power		See Table			
Output Current		See Table			
Ripple & Noise		See Table			
PROTECTION					
Short Circuit Protection		Yes			
Over Load Protection	Hiccup Mode, Automatic Recovery	105		150	%
ENVIRONMENTAL SPECIFICATIONS					
Operating Temperature		-20		+50	°C
Operating Humidity (non-condensing)		20		90	% RH
Storage Temperature		-20		+85	°C
Storage Humidity (non-condensing)		20		95	% RH
Cooling Method		Free air convection			
GENERAL SPECIFICATIONS					
Efficiency		See Table			
Withstand Voltage	Input to Output	All for 1 Minute		1.5	KVAC
	Input to FG			1.5	
	Output to FG			0.5	
Isolation Resistance	@500VDC	100			MΩ
PHYSICAL SPECIFICATIONS					
Weight		4.94oz (140g)			
Dimensions (L x W x H)		3.94in x 2.83in x 1.22in (100 x 58mm x 31mm)			
SAFETY CHARACTERISTICS					
Safety Approvals		Design Refers to GB4943, UL60950 ⁽¹⁾ , EN60950			

NOTES

1. This product is Listed to applicable standards and requirements by UL.

*Due to advances in technology, specifications subject to change without notice.

MECHANICAL DRAWINGS

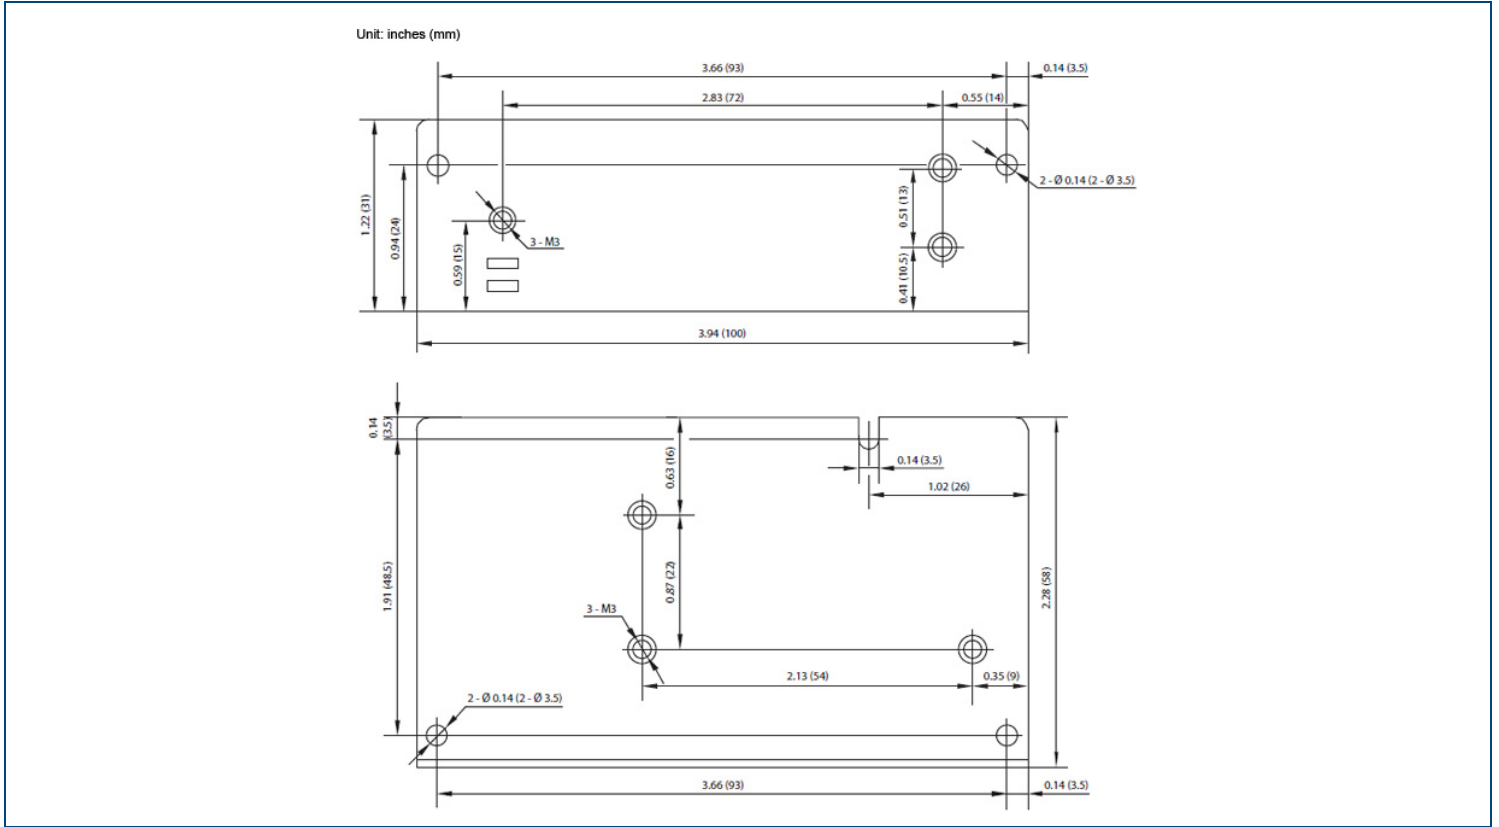

COMPANY INFORMATION

Wall Industries, Inc. has created custom and modified units for over 50 years. Our in-house research and development engineers will provide a solution that exceeds your performance requirements on-time and on budget. Our ISO9001 certification is just one example of our commitment to producing a high quality, well-documented product for our customers.

Our past projects demonstrate our commitment to you, our customer. Wall Industries, Inc. has a reputation for working closely with its customers to ensure each solution meets or exceeds form, fit and function requirements. We will continue to provide ongoing support for your project above and beyond the design and production phases. Give us a call today to discuss your future projects.

Contact **Wall Industries** for further information:

Phone: ☎(603)778-2300
 Toll Free: ☎(888)597-9255
 Fax: ☎(603)778-9797
 E-mail: sales@wallindustries.com
 Web: www.wallindustries.com
 Address: 37 Industrial Drive
 Exeter, NH 03833

©2019 Wall Industries, Inc. Specifications subject to change without notice. Wall Industries is not responsible for typographical errors. The information contained herein is for informational purposes only. This information is provided by Wall Industries and we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information contained in this document for any purpose. All product and manufacturer names are trademarks or registered trademarks of their respective companies.